

Metalogix® StoragePoint 5.7

Caringo CASTor Adapter Guide



© 2018 Quest Software Inc. ALL RIGHTS RESERVED.

This guide contains proprietary information protected by copyright. The software described in this guide is furnished under a software license or nondisclosure agreement. This software may be used or copied only in accordance with the terms of the applicable agreement. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of Quest Software Inc.

The information in this document is provided in connection with Quest Software products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Quest Software products. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, QUEST SOFTWARE ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL QUEST SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF QUEST SOFTWARE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Quest Software makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Quest Software does not make any commitment to update the information contained in this document.

If you have any questions regarding your potential use of this material, contact:

Quest Software Inc.
Attn: LEGAL Dept.
4 Polaris Way
Aliso Viejo, CA 92656

Refer to our Web site (<https://www.quest.com>) for regional and international office information.

Patents

Quest Software is proud of our advanced technology. Patents and pending patents may apply to this product. For the most current information about applicable patents for this product, please visit our website at <https://www.quest.com/legal>.

Trademarks

Quest, the Quest logo, and Metalogix are trademarks and registered trademarks of Quest Software Inc. and its affiliates. For a complete list of Quest marks, visit <https://www.quest.com/legal/trademark-information.aspx>. All other trademarks and registered trademarks are property of their respective owners.

Metalogix® StoragePoint

Updated October 2018

Version 5.7

Contents

CAStor Adapter Configuration	4
CAStor Adapter Connection String Parameters	4
Example Storage Endpoint using CAStor Adapter	8
Appendix: Troubleshooting	9
Problem: Receiving errors on storage or retrieval of externalized content.	9
About Us	10
Contacting Quest	10
Technical Support Resources	10


CAStor Adapter Configuration

This section will provide you details on how to configure a storage endpoint's connection string to utilize the CAStor Adapter. Please refer to the StoragePoint Reference Guide for information on managing Storage Endpoints.

On the Application Management page, click *Storage and Backup Endpoints*.

Click *Create New Endpoint* or click the name of an existing storage endpoint that you want to edit.

Click the *Show* link next to the Advanced Adapter Settings to see the additional fields.

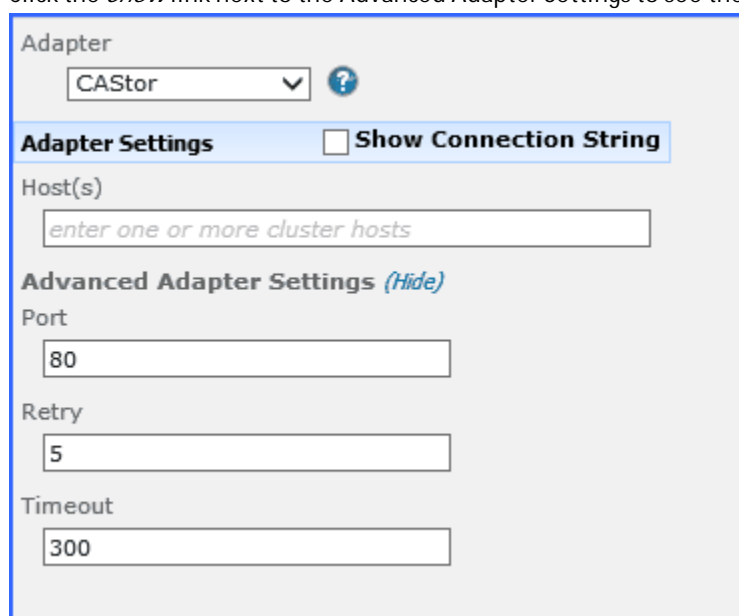

Adapter

CAStor

Adapter Settings Show Connection String

Host(s)

enter one or more cluster hosts

Advanced Adapter Settings (hide)

Port

80

Retry

5

Timeout

300

CAStor Adapter Connection String Parameters

Setting	Value/Options
Name	Enter the unique name of the Storage or Backup Endpoint.
Type	<p><i>Primary</i>– this endpoint will be available for externalization when creating storage profiles.</p> <p><i>Backup</i>– this endpoint will be in the Backup Services dropdown on the profile page.</p>
See Backup Services Settings in the Reference Guide for more information on how Backup Endpoints are used.	

Setting	Value/Options
	The selection is locked down when saving.
<p>Status</p> <div data-bbox="209 472 611 595"> <p>Status</p> <p>Online</p> </div>	<p><i>Online</i>– Storage Endpoint should be available to associate to a Storage Profile and accept BLOBs. (default)</p> <p><i>Offline (Read Only)</i>– A storage endpoint can be configured, but not made available for externalizing content. The BLOBs already on the endpoint are still read only.</p>
<p>Adapter</p> <div data-bbox="209 835 592 936"> <p>CASTor</p> </div>	Select the adapter for the endpoint that is being created.
<p>Host(s)</p> <div data-bbox="209 987 879 1088"> <p>10.12.225.225</p> </div>	<p>IP or DNS name chosen at the time your storage solution was provisioned which represents the CASTor system or specific node to be used. This can also be a comma separated list of CASTor node addresses if working with a cluster.</p> <p>Single host examples:</p> <p>mycluster.company.com</p> <p>Or</p> <p>192.168.1.42</p> <p>High Availability Example (in this case three hosts):</p> <p>192.168.1.10, 192.168.1.20, 192.168.1.30</p>
<p>Advanced Adapter Settings <i>(Hide)</i></p> <p>Port</p> <div data-bbox="209 1832 871 1966"> <p>80</p> </div>	The port number used to communicate with the CASTor instance. Default=80.

Setting	Value/Options
<p>Retry</p> <input data-bbox="236 331 852 376" type="text" value="3"/>	<p>Specifies the number of attempts to retry the network connection to CASstor before returning a failure result in case of network disruption or connectivity issues. Default = 5.</p>
<p>Timeout</p> <input data-bbox="236 591 852 636" type="text" value="300"/>	<p>Number of milliseconds to wait for a response to any request before considering it an excessively long wait and raising an error condition. Default = 300.</p>
<p>Is WORM Device</p> <input data-bbox="300 860 395 904" type="button" value="No"/>	<p>If the endpoint is on a WORM (Write Once, Read Many) device, Unused BLOB Cleanup will ignore this endpoint.</p>
<p>Folder Content in BLOB Store</p> <input data-bbox="236 1016 325 1061" type="button" value="Yes"/> <p>Folder Scheme</p> <input data-bbox="236 1106 564 1151" type="text" value="YYYY/MM/DD/HH/MM"/>	<p><i>No</i>– Externalized content BLOBs are not placed in folders.</p> <p><i>Yes</i>– Externalized content BLOBs are placed in folders (default).</p> <p>If <i>Folder Content in BLOB Store</i> is <i>Yes</i> then you can select a date/time folder scheme from the dropdown.</p> <p>YYYY/MM/DD/HH/MM is the default.</p>
<p>Test Storage Settings</p>	<p>The Test Storage Settings button can be used at this point, or after completing the endpoint configuration, to verify that the endpoint is accessible.</p>
<p>Compress Content in BLOB Store</p> <input data-bbox="236 1697 325 1742" type="button" value="No"/> <p><i>Content is compressed using the GZip/Deflate method.</i></p>	<p><i>No</i>– Externalized content BLOBs are not compressed (default).</p> <p><i>Yes</i>– Externalized content BLOBs are compressed.</p>
<p>Encryption Method for Content in BLOB Store</p> <input data-bbox="236 1921 443 1966" type="text" value="None"/>	<p><i>None</i>– Encryption will not be applied to externalized BLOBs (default).</p>

Setting	Value/Options
	<p><i>AES (128 bit)</i>– 128 bit AES encryption will be applied to externalized BLOBs.</p> <p><i>AES (256 bit)</i>– 256 bit AES encryption will be applied to externalized BLOBs.</p>
<p>Encryption Key Passphrase</p> <div style="border: 1px solid #ccc; padding: 5px;"> <input style="width: 150px; height: 20px;" type="text"/> <input type="button" value="Generate Key"/> <p><i>Enter a passphrase to be used to generate a key or leave blank to generate a random key. The pass phrase entered is not saved with the Endpoint.</i></p> </div>	<p>Enter a passphrase to use when generating the encryption key. Using a passphrase will help you re-create the encryption key if necessary. You can generate a random key by leaving the box blank and clicking the <i>Generate Key</i> button. The encryption key passphrase will be hidden.</p>
<p>Generate warning notification if:</p> <p><input checked="" type="checkbox"/> <input style="width: 40px;" type="text" value="10"/> or more successive errors are encountered</p> <p><input checked="" type="checkbox"/> there is less than <input style="width: 40px;" type="text" value="10"/> <input checked="" type="radio"/> MB <input type="radio"/> % of free space</p>	<p>A warning email can be sent if it encounters errors.</p>
<p>Automatically take endpoint offline if:</p> <p><input checked="" type="checkbox"/> <input style="width: 40px;" type="text" value="25"/> or more successive errors are encountered</p> <p><input checked="" type="checkbox"/> there is less than <input style="width: 40px;" type="text" value="1"/> <input checked="" type="radio"/> MB <input type="radio"/> % of free space</p>	<p>An online storage endpoint can be automatically taken offline if it encounters errors. If a storage endpoint is taken offline automatically, BLOBs that were intended to be written to that endpoint will go to the content database.</p>
<p>Send Offline Notifications to:</p> <p><input checked="" type="checkbox"/> Use Notification Defaults</p> <p>Additional Contacts</p> <div style="border: 1px solid #ccc; padding: 2px;"> <p>admin@company.com</p> </div> <p><i>Provide a semi-colon delimited list of e-mail addresses.</i></p>	<p>Default email addresses for system error and offline notification can be entered. Check the box to include the list of Default Notification Contacts specified on the General Settings page.</p>

Example Storage Endpoint using CASTor Adapter

Adapter
CASTor

Adapter Settings Show Connection String

Host(s)
10.12.225.225

Advanced Adapter Settings (Hide)

Port
80

Retry
3

Timeout
300

Click the *Show Connection String* checkbox to edit the connection string. Otherwise, fill in the connection fields shown for the adapter selected. Notice that the connection string parameters are name/value pairs separated by semi-colons.

Adapter
CASTor

Adapter Settings Show Connection String

Connection
HOST=10.12.225.225;PORT=80;RETRY=5;TIMEOUT=300;

Provide adapter-specific connection attributes. Please refer to the adapter documentation for connection string details.

NOTE: Adapter parameters are not case-sensitive.

NOTE: You should always use a passphrase when generating encryption keys. The passphrase gives you a means of re-creating keys should they become unrecoverable or corrupt. It is very important to remember or record the passphrase outside of Metalogix StoragePoint. Otherwise, encrypted content could become irretrievable in the event of a database failure.

If you choose to externalize content you should test the storage profile settings by clicking the *Test Storage Settings* button. A message under the button will indicate whether or not the test was successful. If the test fails the message will include the error that was the root cause of the failure.

NOTE: When testing access to an endpoint from within Central Administration, the Identity of the Application Pool hosting the Central Administration Site is the one that is being used for the test. If there are different Identities used for other Web Applications in the Farm then those identities will also need access but cannot be tested from within Central Admin itself. See BLOB Store Security and Metalogix StoragePoint Required Privileges in the Metalogix StoragePoint Reference Guide.

Appendix: Troubleshooting

Problem: Receiving errors on storage or retrieval of externalized content.

Wherever possible, StoragePoint surfaces error messages returned by CAStor either directly to the user or within the SharePoint ULS logs. You should refer to your CAStor documentation for errors logged by the CAStor Adapter.

About Us

We are more than just a name

We are on a quest to make your information technology work harder for you. That is why we build community-driven software solutions that help you spend less time on IT administration and more time on business innovation. We help you modernize your data center, get you to the cloud quicker and provide the expertise, security and accessibility you need to grow your data-driven business. Combined with Quest's invitation to the global community to be a part of its innovation, and our firm commitment to ensuring customer satisfaction, we continue to deliver solutions that have a real impact on our customers today and leave a legacy we are proud of. We are challenging the status quo by transforming into a new software company. And as your partner, we work tirelessly to make sure your information technology is designed for you and by you. This is our mission, and we are in this together. Welcome to a new Quest. You are invited to Join the Innovation™.

Our brand, our vision. Together.

Our logo reflects our story: innovation, community and support. An important part of this story begins with the letter Q. It is a perfect circle, representing our commitment to technological precision and strength. The space in the Q itself symbolizes our need to add the missing piece — you — to the community, to the new Quest.

Contacting Quest

For sales or other inquiries, visit www.quest.com/contact.

Technical Support Resources

Technical support is available to Quest customers with a valid maintenance contract and customers who have trial versions. You can access the Quest Support Portal at <https://support.quest.com>

The Support Portal provides self-help tools you can use to solve problems quickly and independently, 24 hours a day, 365 days a year. The Support Portal enables you to:

- Submit and manage a Service Request
- View Knowledge Base articles

- Sign up for product notifications
- Download software and technical documentation
- View how-to-videos
- Engage in community discussions
- Chat with support engineers online
- View services to assist you with your product