

Metalogix® StoragePoint 5.9.1

## EMCECS Adapter Guide



© 2020 Quest Software Inc. ALL RIGHTS RESERVED.

This guide contains proprietary information protected by copyright. The software described in this guide is furnished under a software license or nondisclosure agreement. This software may be used or copied only in accordance with the terms of the applicable agreement. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of Quest Software Inc.

The information in this document is provided in connection with Quest Software products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Quest Software products. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, QUEST SOFTWARE ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL QUEST SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF QUEST SOFTWARE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Quest Software makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Quest Software does not make any commitment to update the information contained in this document.

If you have any questions regarding your potential use of this material, contact:

Quest Software Inc.  
Attn: LEGAL Dept.  
4 Polaris Way  
Aliso Viejo, CA 92656

Refer to our Web site (<https://www.quest.com>) for regional and international office information.

#### Patents

Quest Software is proud of our advanced technology. Patents and pending patents may apply to this product. For the most current information about applicable patents for this product, please visit our website at <https://www.quest.com/legal>.

#### Trademarks

Quest, the Quest logo, and Metalogix are trademarks and registered trademarks of Quest Software Inc. and its affiliates. For a complete list of Quest marks, visit <https://www.quest.com/legal/trademark-information.aspx>. All other trademarks and registered trademarks are property of their respective owners.

Metalogix® StoragePoint

Updated February 2020

Version 5.9

# Contents

<b>EMCECS Adapter Configuration</b> .....	<b>4</b>
EMCECS Adapter Connection String Parameters .....	6
Example Storage Endpoint using EMCECS Adapter .....	10
Appendix: Troubleshooting .....	13
Problem: Receiving errors on storage or retrieval of externalized content. ....	13
<b>About Us</b> .....	<b>14</b>
Contacting Quest .....	14
Technical Support Resources .....	14

---

# EMCECS Adapter Configuration

This section will provide you details on how to configure a storage endpoint's connection string to utilize the EMCECS Adapter, which is standard with StoragePoint. Please refer to the StoragePoint Reference Guide for information on managing Storage Endpoints.

For more information on the EMCECS implementation, see the EMC [documentation](#).

On the Application Management page, click *Storage and Backup Endpoints*.

Click *Create New Endpoint* or click the name of an existing storage endpoint that you want to edit.

Click the *Show* link next to the Advanced Adapter Settings to see the additional fields.

Storage Settings  
Please provide storage device settings in this section.

Adapter  
EMCECS

Adapter Settings  Show Connection String  
EMCECSS3

Access Key  
enter an account Access Key

Secret Key  
enter an account Secret Key

Bucket Name  
enter an account Bucket name  
*(Lowercase letters and "DNS Friendly" naming highly recommended.)*

**Advanced Adapter Settings** *(Hide)*

Use SSL  
True

Proxy URI  
enter simple proxy for communication (optional)

S3 Host  
specifies explicitly the Host to use (optional)

S3 Port Number  
enter port number (optional)

Strict SSL  
No

Region  
Enter Region Name.

Storage Settings  
Please provide storage device settings in this section.

Adapter  
EMCECS

Adapter Settings  Show Connection String  
EMCECSAtmos

UID  
enter an account UID

Key  
enter an account Key

**Advanced Adapter Settings** *(Hide)*

Base URI  
accesspoint.emccis.com

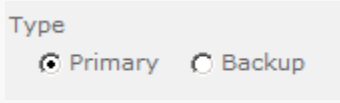
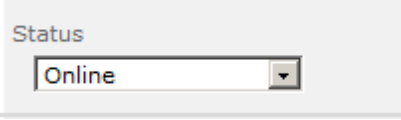



Root  
enter an account Root value (optional)

Use SSL  
No

Port  
80

Verify Hash  
No

# EMCECS Adapter Connection String Parameters

Setting	Value/Options
<p>Name</p>	<p>Enter the unique name of the Storage or Backup Endpoint.</p>
<p>Type</p>  <p>See Backup Services Settings in the Reference Guide for more information on how Backup Endpoints are used.</p>	<p><i>Primary</i>– this endpoint will be available for externalization when creating storage profiles.</p> <p><i>Backup</i>– this endpoint will be in the Backup Services dropdown on the profile page.</p> <p>The selection is locked down when saving.</p>
<p>Status</p> 	<p><i>Online</i>– Storage Endpoint should be available to associate to a Storage Profile and accept BLOBs. (default)</p> <p><i>Offline (Read Only)</i>– A storage endpoint can be configured, but not made available for externalizing content. The BLOBs already on the endpoint are still read only.</p>
<p>Adapter</p> 	<p>Select the adapter for the endpoint that is being created.</p>
<p>Adapter Settings</p> 	<p>After selecting the Adapter EMCECS, an additional dropdown selection must be made to designate if Atmos or S3 protocols will be used for the endpoint configuration.</p>
<p>UID</p> 	<p>ATMOS: The username to use when connecting to the server. This is equivalent to the Token ID provided with your Atmos online account.</p>

Setting	Value/Options
<p>Key</p> <input data-bbox="236 344 855 383" type="text"/>	<p>ATMOS: The base64 encoded shared secret to use when signing requests to the server.</p>
<p><b>Advanced Adapter Settings</b> <i>(Hide)</i></p> <p>Base URI</p> <input data-bbox="236 555 847 593" type="text" value="accesspoint.emccis.com"/>	<p>ATMOS: IP address or host name that represents the Atmos instance or specific node to be used. Default = accesspoint.emccis.com.</p>
<p>Root</p> <input data-bbox="236 725 847 763" type="text"/>	<p>ATMOS: The starting folder/container within your Atmos namespace under which all folders and files will be created.</p>
<p>Use SSL</p> <input data-bbox="236 949 325 987" type="button" value="No"/>	<p>ATMOS: <i>(yes/no)</i> Determines whether or not the adapter negotiates an SSL connection for all data (and metadata) transfers. Default = No.</p>
<p>Port</p> <input data-bbox="264 1218 751 1256" type="text" value="enter a port number (optional)"/>	<p>ATMOS: The port on the server to communicate with. Default = 9022 (9023 if UseSSL is Yes).</p>
<p>Verify Hash</p> <input data-bbox="236 1397 325 1435" type="button" value="No"/>	<p>ATMOS: <i>(yes/no)</i> Includes a checksum operation after each blob transfer. Allows the adapter to detect and log data integrity errors immediately. Default = No.</p>
<p>Adapter Settings</p> <div data-bbox="225 1617 437 1682"> <input type="button" value="EMCECSAtmos"/> <input checked="" type="button" value="EMCECSS3"/> </div>	<p>S3 Options</p>
<p>Access Key</p> <input data-bbox="236 1778 847 1816" type="text"/>	<p>S3: The Access Key ID provided when you signed up for the S3 service. Required.</p>


Setting	Value/Options
<p>Secret Key</p> <input data-bbox="240 349 855 387" type="text"/>	<p>S3: The Secret Access Key provided when you signed up for the S3 service. Required.</p>
<p>Bucket Name</p> <input data-bbox="236 517 844 555" type="text" value="8192"/> <p><i>(Lowercase letters and "DNS Friendly" naming highly recommended.)</i></p>	<p>S3: The container within your S3 account where content associated with a storage profile will be stored. Bucket names are case sensitive and unique across the entire S3 service namespace.</p>
<p><b>Advanced Adapter Settings</b> <i>(hide)</i></p> <p>Use SSL</p> <input data-bbox="236 842 344 880" type="text" value="True"/>	<p>S3: (<i>true/false</i>) Determines whether or not the adapter negotiates an SSL connection for all data (and metadata) transfers. Default = False.</p>
<p>Proxy URI</p> <input data-bbox="248 1037 863 1075" type="text"/>	<p>S3: Used to take the URL (optionally including a port) of a simple non-authenticating proxy that will be used when communicating with EMCECS services.</p>
<p>S3 Host</p> <input data-bbox="248 1292 863 1330" type="text"/>	<p>IP or DNS name that represents the access point for the Amazon AWS service.</p>
<p>S3 Port Number</p> <input data-bbox="236 1467 365 1505" type="text"/>	<p>Port used to access the S3 service. Default = 9020 for http and 9021 for https.</p>
<p>Strict SSL</p> <input data-bbox="260 1677 352 1715" type="text" value="No"/>	<p>(<i>Yes/No</i>) If <i>UseSSL</i> is <i>Yes</i>, the <i>StrictSSL</i> flag controls whether or not the use of "self-issued" or otherwise suspicious certificates on the system will be tolerated.</p>
<p>Region</p> <input data-bbox="236 1919 855 1957" type="text" value="Enter Region Name."/>	<p>Used in AWS4 request signing, this is an optional property; change it only</p>




Setting	Value/Options
	<p>if the region cannot be determined from the service endpoint.</p> <p>For custom or private clouds or where StoragePoint cannot automatically retrieve the region because of security or permission reasons.</p>

# Example Storage Endpoint using EMCECS Adapter

Adapter

EMCECS  

Adapter Settings  Show Connection String

EMCECSS3  

Access Key

username

Secret Key

.....

Bucket Name

bucketname

*(Lowercase letters and "DNS Friendly" naming highly recommended.)*

**Advanced Adapter Settings** *(Hide)*

Use SSL

True

Proxy URI

enter simple proxy for communication (optional)

S3 Host

http://172.1.2.3

S3 Port Number

1230


Strict SSL

No


Region

Enter Region Name.

Adapter

EMCECS  

Adapter Settings  Show Connection String

EMCECSAtmos  

UID

ask4da6lksdjh2iu78rhr56ga89/usersatmos

Key

.....

**Advanced Adapter Settings** *(Hide)*

Base URI

accesspoint.emcecs.com

Root

enter an account Root value (optional)

Use SSL

No

Port

1040

Verify Hash

No

Click the *Show Connection String* checkbox to edit the connection string. Otherwise, fill in the connection fields shown for the adapter selected. Notice that the connection string parameters are name/value pairs separated by semi-colons.

Status  
Online  **S3**

Adapter  
EMCECS  ?

Adapter Settings  Show Connection String

Connection

```
ACCESSKEY=username;SECRETKEY=*****;BUCKET=bucketname;USESSL=True;PROXY=;HOST=http://172.1.2.3;PORT=1230;PROTOCOL=EMCECSS3;;STRICTSSL=False;REGION=
```

*Provide adapter-specific connection attributes. Please refer to the adapter documentation for connection string details.*

Adapter  
EMCECS  ? **Atmos**

Adapter Settings  Show Connection String

Connection

```
UID=ask4da6lkdsjh2iu78rhr56ga89/usersatmos;KEY=*****;BASEURI=accesspoint.emcecs.com;PORT=1040;ROOT=;USESSL=False;VERIFYHASH=False;PROTOCOL=EMCECSAtmos;
```

*Provide adapter-specific connection attributes. Please refer to the adapter documentation for connection string details.*

**NOTE:** Adapter parameters are not case-sensitive.

**NOTE:** You should always use a passphrase when generating encryption keys. The passphrase gives you a means of re-creating keys should they become unrecoverable or corrupt. It is very important to remember or record the passphrase outside of Metalogix StoragePoint. Otherwise, encrypted content could become irretrievable in the event of a database failure.

If you choose to externalize content you should test the storage profile settings by clicking the *Test Storage Settings* button. A message under the button will indicate whether or not the test was successful. If the test fails the message will include the error that was the root cause of the failure.

NOTE: When testing access to an Endpoint (fileshare) from within Central Administration, the Identity of the Application Pool hosting the Central Administration Site is the one that is being used for the test. If there are different Identities used for other Web Applications in the Farm then those identities will also need access but cannot be tested from within Central Admin itself. See BLOB Store Security and Metalogix StoragePoint Required Privileges in the Metalogix StoragePoint Reference Guide.

## Appendix: Troubleshooting

### Problem: Receiving errors on storage or retrieval of externalized content.

Wherever possible, StoragePoint surfaces error messages returned by the adapter either directly to the user or within the SharePoint ULS logs. You should refer to your storage platform/provider documentation for resolution to errors logged by the adapter.

---

## About Us

### We are more than just a name

We are on a quest to make your information technology work harder for you. That is why we build community-driven software solutions that help you spend less time on IT administration and more time on business innovation. We help you modernize your data center, get you to the cloud quicker and provide the expertise, security and accessibility you need to grow your data-driven business. Combined with Quest's invitation to the global community to be a part of its innovation, and our firm commitment to ensuring customer satisfaction, we continue to deliver solutions that have a real impact on our customers today and leave a legacy we are proud of. We are challenging the status quo by transforming into a new software company. And as your partner, we work tirelessly to make sure your information technology is designed for you and by you. This is our mission, and we are in this together. Welcome to a new Quest. You are invited to Join the Innovation™.

### Our brand, our vision. Together.

Our logo reflects our story: innovation, community and support. An important part of this story begins with the letter Q. It is a perfect circle, representing our commitment to technological precision and strength. The space in the Q itself symbolizes our need to add the missing piece — you — to the community, to the new Quest.

### Contacting Quest

For sales or other inquiries, visit [www.quest.com/contact](http://www.quest.com/contact).

### Technical Support Resources

Technical support is available to Quest customers with a valid maintenance contract and customers who have trial versions. You can access the Quest Support Portal at <https://support.quest.com>

The Support Portal provides self-help tools you can use to solve problems quickly and independently, 24 hours a day, 365 days a year. The Support Portal enables you to:

- Submit and manage a Service Request
- View Knowledge Base articles

- Sign up for product notifications
- Download software and technical documentation
- View how-to-videos
- Engage in community discussions
- Chat with support engineers online
- View services to assist you with your product