

Metalogix® StoragePoint 6.1.1

EMC Centera Adapter Guide



© 2022 Quest Software Inc. ALL RIGHTS RESERVED.

This guide contains proprietary information protected by copyright. The software described in this guide is furnished under a software license or nondisclosure agreement. This software may be used or copied only in accordance with the terms of the applicable agreement. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of Quest Software Inc.

The information in this document is provided in connection with Quest Software products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Quest Software products. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, QUEST SOFTWARE ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL QUEST SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF QUEST SOFTWARE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Quest Software makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Quest Software does not make any commitment to update the information contained in this document.

If you have any questions regarding your potential use of this material, contact:

Quest Software Inc.
Attn: LEGAL Dept.
4 Polaris Way
Aliso Viejo, CA 92656

Refer to our Web site (<https://www.quest.com>) for regional and international office information.

Patents

Quest Software is proud of our advanced technology. Patents and pending patents may apply to this product. For the most current information about applicable patents for this product, please visit our website at <https://www.quest.com/legal>.

Trademarks

Quest, the Quest logo, and Metalogix are trademarks and registered trademarks of Quest Software Inc. and its affiliates. For a complete list of Quest marks, visit <https://www.quest.com/legal/trademark-information.aspx>. All other trademarks and registered trademarks are property of their respective owners.

Legend

 **CAUTION:** A caution icon indicates potential damage to hardware or loss of data if instructions are not followed.

 **IMPORTANT, NOTE, TIP, MOBILE OR VIDEO:** An information icon indicates supporting information.

Metalogix® StoragePoint
Updated August 2022
Version 6.1.1

Contents

Centera Adapter Configuration	4
Centera Adapter Connection String Parameters	4
Example Storage Endpoint Using Centera Adapter	8
PEA Files	9
Retention Promotion from IMP	9
Event Based Retention	10
Appendix: Troubleshooting	11
Problem: Receiving errors on storage or retrieval of externalized content	11
Problem: The Test Storage Settings button on the endpoint connection page is returning an error	11
Problem: Unable to load DLL 'FPLibrary.dll'	11
StoragePoint and EMC Centera Replication Capabilities	12
About Us	13
Contacting Quest	13
Technical Support Resources	13

Centera Adapter Configuration

This section will provide you details on how to configure a storage endpoint's connection string to utilize the Centera Adapter. Please refer to the StoragePoint Reference Guide for information on managing Storage Endpoints.

On the Application Management page, click *Storage and Backup Endpoints*.

Click *Create New Endpoint* or click the name of an existing storage endpoint that you want to edit.

Adapter
EMCCentera

Adapter Settings Show Connection String

Address
enter an account address

Retention

None

Date Format

Duration/Interval Day(s)

Centera Adapter Connection String Parameters

Setting Value/Options
<p>Name</p> <p>Enter the unique name of the Storage or Backup Endpoint.</p>
<p>Type</p> <p>Type</p> <p><input checked="" type="radio"/> Primary <input type="radio"/> Backup</p> <p><i>Primary</i>– this endpoint will be available for externalization when creating storage profiles.</p> <p><i>Backup</i>– this endpoint will be in the Backup Services dropdown on the profile page.</p> <p>The selection is locked down when saving.</p>

Setting Value/Options

See Backup Services Settings in the Reference Guide for more information on how Backup Endpoints are used.


Status



A screenshot of a web interface showing a dropdown menu labeled 'Status'. The menu is open, and 'Online' is selected and displayed in a white box with a small downward arrow on the right.

Online– Storage Endpoint should be available to associate to a Storage Profile and accept BLOBs. (default)

Offline (Read Only)– A storage endpoint can be configured, but not made available for externalizing content. The BLOBs already on the endpoint are still read only.



A screenshot of a web interface showing a dropdown menu labeled 'Adapter'. The menu is open, and 'EMCCentera' is selected and displayed in a white box with a small downward arrow on the right. A blue question mark icon is visible to the right of the dropdown.

Select the adapter for the endpoint that is being created.




A screenshot of a web interface showing an input field labeled 'Address'. The field is empty and has a light gray border.

IP address or host name that represents the cluster address for the Centera instance to be used.

Where examples of the cluster address could be any of the following:

Without PEA (Pool Entry Authorization) file
ADDRESS=centera.denallix.com

With PEA file See Appendix A for more information.
ADDRESS=128.221.200.56?us1_profile1_rwqe.pea
Required.

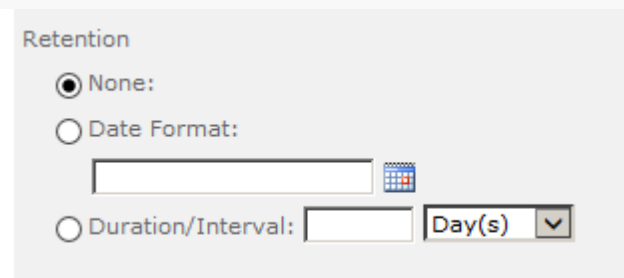

A screenshot of a web interface showing the 'Retention' settings section. It includes three radio button options: 'None:' (selected), 'Date Format:', and 'Duration/Interval:'. The 'Date Format:' option has an empty input field and a calendar icon. The 'Duration/Interval:' option has an empty input field and a dropdown menu set to 'Day(s)'.

If supplied, the Centera adapter will calculate and supply a retention policy when saving content. Possible settings are:

None

[DateFormat] example:

Setting
Value/Options

Retention=08/31/2009;

[Duration][Interval] example:

Retention=5D;

[Interval] may be days (D), months (M) or years (Y).

i | **NOTE:** You can NEVER shorten the retention period once it has been established.



If the endpoint is on a WORM (Write Once, Read Many) device, Unused BLOB Cleanup will ignore this endpoint.

Folder Content in BLOB Store

Yes ▾

Folder Scheme

YYYY/MM/DD/HH/MM ▾

No– Externalized content BLOBs are not placed in folders (default).

Yes– Externalized content BLOBs are placed in folders.

If *Folder Content in BLOB Store* is *Yes* then you can select a date/time folder scheme from the dropdown.

YYYY/MM/DD/HH/MM is the default.

Test Storage Settings

The Test Storage Settings button can be used at this point, or after completing the endpoint configuration, to verify that the endpoint is accessible.

Compress Content in BLOB Store

No ▾

Content is compressed using the GZip/Deflate method.

No– Externalized content BLOBs are not compressed (default).

Yes– Externalized content BLOBs are compressed.

Setting Value/Options

Encryption Method for Content in BLOB Store

None

None– Encryption will not be applied to externalized BLOBs (default).

AES (128 bit)– 128 bit AES encryption will be applied to externalized BLOBs.

AES (256 bit)– 256 bit AES encryption will be applied to externalized BLOBs.

Encryption Key Passphrase

Generate Key

*Enter a passphrase to be used to generate a key or leave blank to generate a random key. The pass phrase entered is **not** saved with the Endpoint.*

Enter a passphrase to use when generating the encryption key. Using a passphrase will help you re-create the encryption key if necessary. You can generate a random key by leaving the box blank and clicking the *Generate Key* button. The encryption key passphrase will be hidden.

Generate warning notification if:

10 or more successive errors are encountered

there is less than 10 MB % of free space

A warning email can be sent if it encounters errors.

Automatically take endpoint offline if:

25 or more successive errors are encountered

there is less than 1 MB % of free space

An online storage endpoint can be automatically taken offline if it encounters errors. If a storage endpoint is taken offline automatically, BLOBs that were intended to be written to that endpoint will go to the content database.

Send Offline Notifications to:

Use Notification Defaults

Additional Contacts

admin@company.com

Provide a semi-colon delimited list of e-mail addresses.

Default email addresses for system error and offline notification can be entered. Check the box to include the list of Default Notification Contacts specified on the General Settings page.

Example Storage Endpoint Using Centera Adapter

Storage Settings
Provide general storage settings in this section

Adapter: ?

Adapter Settings Show Connection String

Address:

Retention:

- None:
- Date Format:
- Duration/Interval: Day(s)

Click the *Show Connection String* checkbox to edit the connection string. Otherwise, fill in the connection fields shown for the adapter selected. Notice that the connection string parameters are name/value pairs separated by semi-colons when editing using the Show Connection String option.

Storage Settings
Provide general storage settings in this section

Adapter: ?

Adapter Settings Show Connection String

Connection:

```
ADDRESS=128.221.200.56?  
us1_profile1_rwqe.pea;RETENTION=*3/1/2010;
```

Provide adapter-specific connection attributes. Please refer to the adapter documentation for connection string details.

i | **NOTE:** Adapter parameters are not case-sensitive.

i | **NOTE:** You should always use a passphrase when generating encryption keys. The passphrase gives you a means of re-creating keys should they become unrecoverable or corrupt. It is very important to remember or record the passphrase outside of Metalogix StoragePoint. Otherwise, encrypted content could become irretrievable in the event of a database failure.

If you choose to externalize content you should test the storage profile settings by clicking the *Test Storage Settings* button. A message under the button will indicate whether or not the test was successful. If the test fails the message will include the error that was the root cause of the failure.

i | **NOTE:** When testing access to an endpoint from within Central Administration, the Identity of the Application Pool hosting the Central Administration Site is the one that is being used for the test. If there are different Identities used for other Web Applications in the Farm then those identities will also need access but cannot be tested from within Central Admin itself. See BLOB Store Security and Metalogix StoragePoint Required Privileges in the Metalogix StoragePoint Reference Guide.

PEA Files

A client connection to a Centera system typically involves two pieces.

The first is the IP address or host name of the cluster itself.

The second is typically a ".pea" file which contains detailed authentication and rights information.

Here is an example: "192.168.1.10?d:\my_conn.pea"

Clients using the Centera API (this includes the StoragePoint Adapter for Centera) use a .pea file when connecting with Centera.

Each client machine (think "server in the farm") *must* have a copy of the *same* .pea file accessible for use in a consistent location. This file must also be on the machine hosting SharePoint Central Administration.

For example if the pea file used to connect is located at "D:\my_conn.pea" on one Farm machine then it must be similarly located and named on *all* Farm machines.

File system access to the pea file must be granted to the process and service identities of SharePoint. This file will be read when connecting to Centera.

(This requirement is similar to the set of identities that would be configured on a file share in the case of the built-in FileSystem adapter.)


For more information about .pea files, please see your Centera documentation.

Retention Promotion from IMP

If retention settings have been configured in the SharePoint site or library, those retention settings will stay with the BLOB when it goes to the endpoint. To enable this, there is a box on the endpoint screen, when adding the endpoint to the profile. If the profile already exists, with

the endpoint added, the feature can still be enabled, but will only be applied to BLOBs created after the feature is enabled.

1. Open or create the profile.
2. Add the endpoint to the profile.
3. On the endpoint screen, at the bottom, will be an option to Enable Retention Promotion from IMP. Check this box.

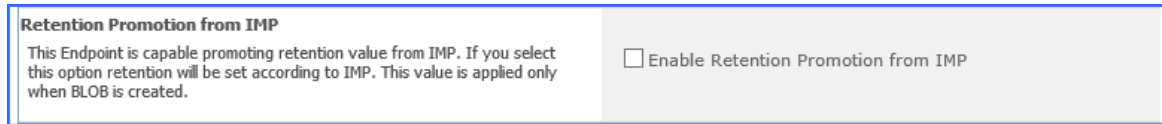


The screenshot shows a section titled "Retention Promotion from IMP". On the left, there is explanatory text: "This Endpoint is capable promoting retention value from IMP. If you select this option retention will be set according to IMP. This value is applied only when BLOB is created." To the right of this text is a checkbox labeled "Enable Retention Promotion from IMP".

Event Based Retention

EBR is a feature that can be configured for certain storage endpoints. In addition to the default retention that can be configured on the endpoint, certain actions like updating a field can update the content to specify a different retention period. The steps for configuring the adapter to support EBR are outlined below.

The endpoint must be added to the profile for the following steps to work.

1. Expand the Archiving section of the profile.
2. Set the Enable Archiving dropdown to Yes.
3. Click New Rule.
4. Click Change to select the scope of the rule, which can be as wide as the profile scope or as narrow as a list. Click OK.
5. Select Metadata Change Rule and click New Condition.
6. By selecting the same endpoint that was added to the profile, a new field displays for designating EBR. Check the EBR box, select a field to base the retention on, and enter the number of days to which to update the retention time.

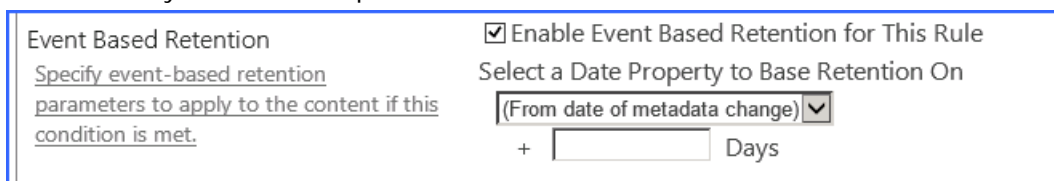

The screenshot shows a configuration window for "Event Based Retention". On the left, there is a link: "Specify event-based retention parameters to apply to the content if this condition is met." On the right, there is a checked checkbox "Enable Event Based Retention for This Rule". Below the checkbox is a label "Select a Date Property to Base Retention On" followed by a dropdown menu showing "(From date of metadata change)". Below the dropdown is a plus sign, an input field, and the word "Days".

7. Click OK on the Condition window.
8. Click OK on the Rule window.
9. Click Save on the archiving page.
10. (OPTIONAL) Select Immediately or schedule a timer job to run, to process existing content for this archiving rule. Click OK on the Process Existing page.

i | **NOTE:** Content retention is modified when the field changes, not when it is uploaded. Uploaded content will receive the default retention setting, but modifying the designated EBR field will update the retention setting for that content.

Appendix: Troubleshooting

Problem: Receiving errors on storage or retrieval of externalized content.

Wherever possible, StoragePoint surfaces error messages returned by the adapter either directly to the user or within the SharePoint ULS logs. You should refer to your storage platform/provider documentation for resolution to errors logged by the adapter.

i | **NOTE:** If there is a mechanism in place such as a batch script or built-in tool to delete or move content from the endpoint after a certain timeframe or retention period, this can impact content in SharePoint. There are safeguards in place to track anything externalized to endpoints managed by a StoragePoint profile, but if the BLOBs are moved or deleted manually or by another mechanism, StoragePoint cannot track this.

Problem: The Test Storage Settings button on the endpoint connection page is returning an error.

When connecting to Centera with retention enabled it is expected that the "Test Storage Settings" button on the endpoint page may report failure as it will be prevented from removing the test file. This is by design.

Problem: Unable to load DLL 'FPLibrary.dll'

The application has failed to start because its side-by-side configuration is incorrect. Please see the application event log or use the command-line `sxstrace.exe` tool for more detail. (Exception from HRESULT: 0x800736B1)

It can be fixed by applying the following security update:

<http://www.microsoft.com/en-us/download/details.aspx?id=26347>

StoragePoint and EMC Centera Replication Capabilities

EMC Centera device has many topology options and offers various replication scenarios. StoragePoint does not need to handle replication aspects at all. The only configuration aspect StoragePoint needs is to have correctly configured PEA file with appropriate access to all replica server(s).



NOTE: The multi-cluster failover option is enabled by default. If a replica node is available, reading is done on secondary node. Write and delete operations will be processed on the primary node or the first available.

Examples of EMC Centera connection strings:

[Cluster topology]

10.2.3.4,10.6.7.8?c:\centera\rwe.pea
10.2.3.4 – primary node in the cluster (may be only one)
10.6.7.8 – secondary node in the cluster (may be more than one)

[Two clusters topology]

10.2.3.4,10.6.7.8?c:\centera\rwe.pea,10.2.9.10,10.6.11.12?c:\centera\rwe.pea,
10.2.3.4 – primary node in the first cluster (may be only one)
10.6.7.8 – secondary node in the first cluster (may be more than one)
10.2.9.10 - primary node in the second cluster (may be only one)
10.6.11.12 - secondary node in the second cluster (may be more than one)

[General schema]

ADDRESS := [primary=|secondary=]IP address | domain name
ADDRESS_LIST := ADDRESS[,ADDRESS_LIST]
CREDENTIAL := [[path=]file system path | name=profile name | secret=secret]
CREDENTIALS := CREDENTIAL[,CREDENTIALS]
CONNECTION_STRING := ADDRESS_LIST[?CREDENTIALS][,CONNECTION_STRING]

About Us

Quest creates software solutions that make the benefits of new technology real in an increasingly complex IT landscape. From database and systems management, to Active Directory and Office 365 management, and cyber security resilience, Quest helps customers solve their next IT challenge now. Around the globe, more than 130,000 companies and 95% of the Fortune 500 count on Quest to deliver proactive management and monitoring for the next enterprise initiative, find the next solution for complex Microsoft challenges and stay ahead of the next threat. Quest Software. Where next meets now. For more information, visit www.quest.com.

Contacting Quest

For sales or other inquiries, visit www.quest.com/contact.

Technical Support Resources

Technical support is available to Quest customers with a valid maintenance contract and customers who have trial versions. You can access the Quest Support Portal at <https://support.quest.com>

The Support Portal provides self-help tools you can use to solve problems quickly and independently, 24 hours a day, 365 days a year. The Support Portal enables you to:

- Submit and manage a Service Request
- View Knowledge Base articles
- Sign up for product notifications
- Download software and technical documentation
- View how-to-videos
- Engage in community discussions
- Chat with support engineers online
- View services to assist you with your product