

Metalogix® StoragePoint 6.3

## FTP Adapter Guide



© 2023 Quest Software Inc. ALL RIGHTS RESERVED.

This guide contains proprietary information protected by copyright. The software described in this guide is furnished under a software license or nondisclosure agreement. This software may be used or copied only in accordance with the terms of the applicable agreement. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of Quest Software Inc.

The information in this document is provided in connection with Quest Software products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Quest Software products. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, QUEST SOFTWARE ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL QUEST SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF QUEST SOFTWARE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Quest Software makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Quest Software does not make any commitment to update the information contained in this document.

If you have any questions regarding your potential use of this material, contact:

Quest Software Inc.  
Attn: LEGAL Dept.  
4 Polaris Way  
Aliso Viejo, CA 92656

Refer to our Web site (<https://www.quest.com>) for regional and international office information.


#### Patents


Quest Software is proud of our advanced technology. Patents and pending patents may apply to this product. For the most current information about applicable patents for this product, please visit our website at <https://www.quest.com/legal>.

#### Trademarks

Quest, the Quest logo, and Metalogix are trademarks and registered trademarks of Quest Software Inc. and its affiliates. For a complete list of Quest marks, visit <https://www.quest.com/legal/trademark-information.aspx>. All other trademarks and registered trademarks are property of their respective owners.

#### Legend

 **CAUTION:** A caution icon indicates potential damage to hardware or loss of data if instructions are not followed.

 **IMPORTANT, NOTE, TIP, MOBILE OR VIDEO:** An information icon indicates supporting information.

Metalogix® StoragePoint  
Updated February 2023  
Version 6.3

# Contents

<b>FTP Adapter Configuration</b> .....	<b>4</b>
FTP Adapter Connection String Parameters .....	6
Example Storage Endpoint using FTP Adapter .....	11
Appendix: Troubleshooting .....	12
Problem: Receiving errors on storage or retrieval of externalized content .....	13
<b>About Us</b> .....	<b>14</b>
Contacting Quest .....	14
Technical Support Resources .....	14

---

# FTP Adapter Configuration

The FTP adapter for StoragePoint allows you to store SharePoint content on an FTP server.

The StoragePoint team strives to keep things as simple as possible for our customers. However, before the FTP Adapter for StoragePoint will function as described in this document, additional configuration may be required.


**i** | **NOTE:** Do not leave connection opened (with your FTP client software) during writing to FTP type endpoint. It may cause "ghost" folder (duplicate folder with the same name) on FTP storage.

This section will provide you details on how to configure a storage endpoint's connection string to utilize the FTP Adapter. Please refer to the StoragePoint Reference Guide for information on managing Storage Endpoints.

On the Application Management page, click *Storage and Backup Endpoints*.

Click *Create New Endpoint* or click the name of an existing storage endpoint that you want to edit.

Click the *Show* link next to the Advanced Adapter Settings to see the additional fields.

Adapter  
Ftp  

Adapter Settings  Show Connection String

Protocol  
Ftp

Host

Port

Use SSL  
True

User

Password

**Advanced Adapter Settings** *(Hide)*

Default Remote Dictionary

Proxy Type  
None


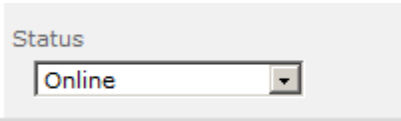


Proxy Host

Proxy Port

Proxy User

Proxy Password

# FTP Adapter Connection String Parameters

Setting Value/Options
<p><b>Name</b> Enter the unique name of the Storage or Backup Endpoint.</p>
<p><b>Type</b></p>  <p><i>Primary</i>– this endpoint will be available for externalization when creating storage profiles. <i>Backup</i>– this endpoint will be in the Backup Services dropdown on the profile page.</p> <p>The selection is locked down when saving.</p> <p>See Backup Services Settings in the Reference Guide for more information on how Backup Endpoints are used.</p>
<p><b>Status</b></p>  <p><i>Online</i>– Storage Endpoint should be available to associate to a Storage Profile and accept BLOBs. (default) <i>Offline (Read Only)</i>– A storage endpoint can be configured, but not made available for externalizing content. The BLOBs already on the endpoint are still read only.</p>
<p><b>Adapter</b></p>  <p>Select the adapter for the endpoint that is being created.</p>
<p><b>Protocol</b></p>  <p>Select Sftp or Ftp.</p>

Setting  
Value/Options

Host

enter a FTP hostname

FTP Host (Server) name. Must be IP address or host name. Required.

Port

990

FTP Port. The default is 21 for unencrypted communication and 990 for encrypted. It must be a number in range 1-65535. Default = 21.

Use SSL

True

True (default) means encrypted communication (SFTP – implicit FTP over STL) will be established. False means “plain” unencrypted FTP communication will be established. Value is set to True and cannot be edited for Sftp protocol

User

enter an account username

FTP Account User name. Required.

Password

enter an account password

FTP Account User name password. Required.

**Advanced Adapter Settings** *(Hide)*

Default Remote Dictionary


enter an account remote dictionary (optional)

Default remote dictionary for FTP user account (not typically necessary to set). Not allowable for Sftp protocol.

Proxy Type

None

- None (default)

Setting Value/Options
<ul style="list-style-type: none"> <li>• Socks4</li> <li>• Socks4a</li> <li>• Socks5</li> </ul>
<p><b>Proxy Host</b></p> <p><input type="text" value="enter proxy host name (optional)"/></p> <p>Proxy Host (Server) name. Must be IP address or host name. Required only if Proxy Type is None.</p>
<p><b>Proxy Port</b></p> <p><input type="text" value="enter proxy number (optional)"/></p> <p>Proxy Port. It must be a number in range 1-65535. Required only if Proxy Type is None.</p>
<p><b>Proxy User</b></p> <p><input type="text" value="enter proxy username (optional)"/></p> <p>Proxy Account User name. Required only if Proxy Type is None.</p>
<p><b>Proxy Password</b></p> <p><input type="text" value="enter proxy password (optional)"/></p> <p>Proxy Account User name password.</p>
<p></p> <p>If the endpoint is on a WORM (Write Once, Read Many) device, Unused BLOB Cleanup will ignore this endpoint.</p>
<p><b>Folder Content in BLOB Store</b></p> <p><input type="text" value="Yes"/></p> <p><b>Folder Scheme</b></p> <p><input type="text" value="YYYY/MM/DD/HH/MM"/></p> <p><i>No</i>– Externalized content BLOBs are not placed in folders (default).</p> <p><i>Yes</i>– Externalized content BLOBs are placed in folders.</p>



Setting  
Value/Options

If *Folder Content in BLOB Store* is *Yes* then you can select a date/time folder scheme from the dropdown.

YYYY/MM/DD/HH/MM is the default.

**Test Storage Settings**

The Test Storage Settings button can be used at this point, or after completing the endpoint configuration, to verify that the endpoint is accessible.

Compress Content in BLOB Store

No

*Content is compressed using the GZip/Deflate method.*

*No*– Externalized content BLOBs are not compressed (default).

*Yes*– Externalized content BLOBs are compressed.

Encryption Method for Content in BLOB Store

None

*None*– Encryption will not be applied to externalized BLOBs (default).

*AES (128 bit)*– 128 bit AES encryption will be applied to externalized BLOBs.

*AES (256 bit)*– 256 bit AES encryption will be applied to externalized BLOBs.

Encryption Key Passphrase

**Generate Key**

*Enter a passphrase to be used to generate a key or leave blank to generate a random key. The passphrase entered is **not** saved with the Endpoint.*

Enter a passphrase to use when generating the encryption key. Using a passphrase will help you re-create the encryption key if necessary. You can generate a random key by leaving the box blank and clicking the *Generate Key* button. The encryption key passphrase will be hidden.

Generate warning notification if:

- or more successive errors are encountered
- there is less than   MB  % of free space

A warning email can be sent if the endpoint encounters errors.

## Setting Value/Options

Automatically take endpoint offline if:

- or more successive errors are encountered  
 there is less than   MB  % of free space

An online storage endpoint can be automatically taken offline if it encounters errors. If a storage endpoint is taken offline automatically, BLOBs that were intended to be written to that endpoint will go to the content database.

Send Offline Notifications to:

- Use Notification Defaults

Additional Contacts

*Provide a semi-colon delimited list of e-mail addresses.*

Default email addresses for system error and offline notification can be entered. Check the box to include the list of Default Notification Contacts specified on the General Settings page.

# Example Storage Endpoint using FTP Adapter

Adapter  
Ftp ?

**Adapter Settings**  Show Connection String

Host  
NY-FTP1.mycompany.internal

Port  
990

Use SSL  
True

User  
user

Password  
●●●●●●●●

**Advanced Adapter Settings** *(Hide)*

Default Remote Dictionary  
/Blobs/2002

Proxy Type  
Socks5


Proxy Host  
proxy.mycompany.internal

Proxy Port  
4575

Proxy User  
user

Proxy Password  
●●●●●●●●

The *Show Connection String* checkbox displays connection string for this adapter. Notice that the connection string parameters are name/value pairs separated by semi-colons.

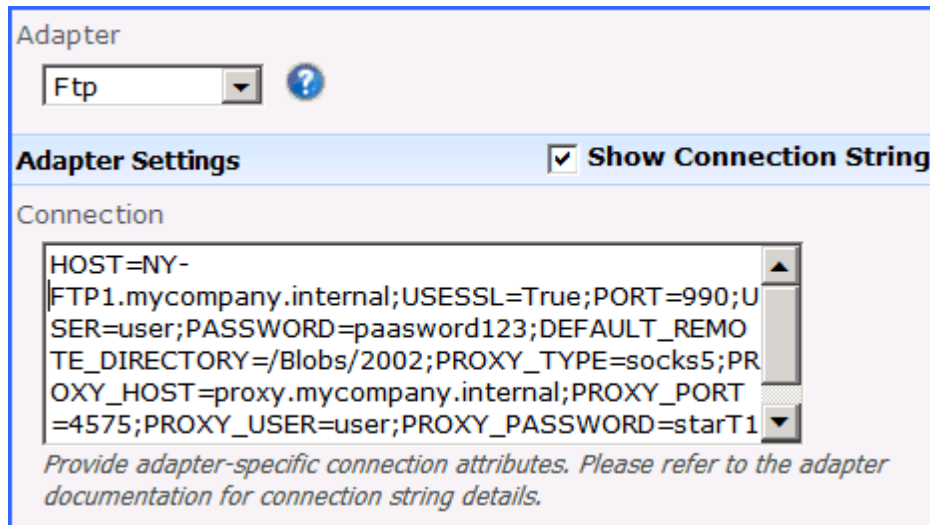

**i** | **NOTE:** Adapter parameters are not case-sensitive.

**i** | **NOTE:** You should always use a passphrase when generating encryption keys. The passphrase gives you a means of re-creating keys should they become unrecoverable or corrupt. It is very important to remember or record the passphrase outside of Metalogix StoragePoint. Otherwise, encrypted content could become irretrievable in the event of a database failure.

If you choose to externalize content you should test the storage profile settings by clicking the *Test Storage Settings* button. A message under the button will indicate whether or not the test was successful. If the test fails the message will include the error that was the root cause of the failure.

**i** | **NOTE:** When testing access to an endpoint from within Central Administration, the Identity of the Application Pool hosting the Central Administration Site is the one that is being used for the test. If there are different Identities used for other Web Applications in the Farm then those identities will also need access but cannot be tested from within Central Admin itself. See BLOB Store Security and Metalogix StoragePoint Required Privileges in the Metalogix StoragePoint Reference Guide.

## Appendix: Troubleshooting

## Problem: Receiving errors on storage or retrieval of externalized content.

Wherever possible, StoragePoint surfaces error messages returned by the adapter either directly to the user or within the SharePoint ULS logs. You should refer to your storage platform/provider documentation for resolution to errors logged by the adapter.

---

## About Us

Quest creates software solutions that make the benefits of new technology real in an increasingly complex IT landscape. From database and systems management, to Active Directory and Office 365 management, and cyber security resilience, Quest helps customers solve their next IT challenge now. Around the globe, more than 130,000 companies and 95% of the Fortune 500 count on Quest to deliver proactive management and monitoring for the next enterprise initiative, find the next solution for complex Microsoft challenges and stay ahead of the next threat. Quest Software. Where next meets now. For more information, visit [www.quest.com](http://www.quest.com).

## Contacting Quest

For sales or other inquiries, visit [www.quest.com/contact](http://www.quest.com/contact).

## Technical Support Resources

Technical support is available to Quest customers with a valid maintenance contract and customers who have trial versions. You can access the Quest Support Portal at <https://support.quest.com>

The Support Portal provides self-help tools you can use to solve problems quickly and independently, 24 hours a day, 365 days a year. The Support Portal enables you to:

- Submit and manage a Service Request
- View Knowledge Base articles
- Sign up for product notifications
- Download software and technical documentation
- View how-to-videos
- Engage in community discussions
- Chat with support engineers online
- View services to assist you with your product