

Metalogix® ControlPoint 8.8.1

User Guide



© 2023 Quest Software Inc. ALL RIGHTS RESERVED.

This guide contains proprietary information protected by copyright. The software described in this guide is furnished under a software license or nondisclosure agreement. This software may be used or copied only in accordance with the terms of the applicable agreement. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of Quest Software Inc.

The information in this document is provided in connection with Quest Software products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Quest Software products. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, QUEST SOFTWARE ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL QUEST SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF QUEST SOFTWARE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Quest Software makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Quest Software does not make any commitment to update the information contained in this document.

If you have any questions regarding your potential use of this material, contact:

Quest Software Inc.
Attn: LEGAL Dept.
4 Polaris Way
Aliso Viejo, CA 92656

Refer to our Web site (<https://www.quest.com>) for regional and international office information.

Patents

Quest Software is proud of our advanced technology. Patents and pending patents may apply to this product. For the most current information about applicable patents for this product, please visit our website at <https://www.quest.com/legal>.

Trademarks

Quest, the Quest logo, and Metalogix are trademarks and registered trademarks of Quest Software Inc. and its affiliates. For a complete list of Quest marks, visit <https://www.quest.com/legal/trademark-information.aspx>. All other trademarks and registered trademarks are property of their respective owners.

Metalogix® ControlPoint

Updated June 2023

Version 8.8.1

Contents

Preface	11
Getting Started with ControlPoint	12
Launching ControlPoint	12
The ControlPoint Home Page	14
The ControlPoint Configuration Site	16
The ControlPoint Interface	17
Icons	18
ControlPoint Left Navigation Panels	19
SharePoint Hierarchy	19
Manage ControlPoint	22
Favorites	23
Search	31
Menus for Site Admins	31
Farm Selection, Product Information, and Online Help	32
Refreshing the SharePoint Hierarchy	33
Reloading the Server-Side Hierarchy Cache	34
Opening a ControlPoint Workspace in a New Window or Tab	34
ControlPoint User Groups	35
Making ControlPoint Available to Business Users (Site Administrators)	36
ControlPoint Security	37
Selecting Objects on Which to Perform a ControlPoint Operation	38
The Workspace Selection Section	40
Changing Your Selection	43
Selecting List Items on Which to Perform a ControlPoint Operation	48
Adding Objects from the SharePoint Hierarchy to Your Selection	51
Saving and Re-Using a SharePoint Object Selection	51

Selecting Users on Which to Perform a ControlPoint Action or Analysis	53
Selecting Individual Users	54
Selecting Users Based on a Wildcard	55
Selecting Users Based on a SharePoint User Profile	56
Using a Combination of User Selection Options	57
Operations that Include Two People Pickers	57
Using Discovery to Collect Information for the ControlPoint Database Cache	58
Running ControlPoint Discovery Interactively from the ControlPoint Application	59
Searching for SharePoint Sites	61
Performing a Simple or Advanced Search	61
Working with Simple or Advanced Search Results	66
Searching within the SharePoint Hierarchy	67
Managing SharePoint Objects	69
Accessing SharePoint Pages	69
Accessing SharePoint Web Application Administrative Pages	70
Accessing SharePoint Site Collection Administration Pages	72
Accessing SharePoint Site Administration Pages	74
Opening a SharePoint Site in ControlPoint	76
Accessing SharePoint Pages for Managing Libraries and Lists	76
Viewing Properties of an Object within the SharePoint Hierarchy	77
Creating Dashboards for Monitoring Statistics within Your SharePoint Farm	82
The GDPR Dashboard	86
Setting Object Properties	88
Setting Site Collection Properties	88
Setting Site Properties	90
Duplicating Site Properties	92
Setting List Properties	94
Duplicating List Properties	96

Managing Site Collection and Site Features	98
Managing Audit Settings	101
Creating and Managing SharePoint Alerts	103
Creating SharePoint Alerts	103
Managing SharePoint Alerts	104
Setting ControlPoint Alerts	106
Managing Metadata	109
Setting Metadata Values	109
Creating a Managed Metadata Column from a Text Column (SharePoint Server)	112
Moving a Site Collection to Another Content Database	118
Deleting Sites	120
Deleting Lists	122
Archiving Audit Log Data Before Moving or Deleting a Site Collection	124
Duplicating a Workflow Definition from one List or Site to Others	126
Removing a Workflow from One or More Lists (or Sites)	128
Using ControlPoint Policies to Control Your SharePoint Environment	133
Factors to Consider When Creating ControlPoint Policies	134
Creating a ControlPoint Policy	137
Managing ControlPoint Policies	144
Viewing/Editing a ControlPoint Policy	146
Deleting ControlPoint Policies	147
Re-Registering a New Site Collection for a Policy	148
Managing SharePoint User Permissions	150
Accessing SharePoint Pages for Managing User Permissions	150
Accessing SharePoint Pages for Managing Groups	152
Setting User Direct Permissions	154
Deleting User Permissions	157
Duplicating a User's Permissions	160

Duplicating a Permissions Level	162
Cleaning Up User Permissions	164
Adding Users to SharePoint Groups	167
Setting SharePoint Group Permissions	169
Deleting SharePoint Group Permissions	171
Deleting SharePoint Groups	173
Managing Permissions Inheritance	175
Managing SharePoint Groups	177
Associating a SharePoint Group from One Site with Other Sites	179
Maintaining SharePoint Group Associations	183
Dissolving Group Associations and Deleting SharePoint Groups	183
Backing Up and Restoring Site Permissions	186
Backing Up Site Permissions	187
Restoring Site Permissions from a Backup	188
Deleting Permissions Backups	190
Duplicating Security from One Site to Others	192
Data Analysis and Reporting	196
Specifying Parameters for Your Analysis	196
Analysis Results Display	202
Working with Data Analysis Results	203
Linking to SharePoint Pages and Other ControlPoint Analyses from Analysis Results	204
Acting on Search or Data Analysis Results	205
Generating a SharePoint Summary Report	206
Analyzing Activity	210
Variations in Activity Data	210
Analyzing Site Collection Activity	211
Analyzing Site Activity	214
Analyzing Most/Least Activity	217

Analyzing Activity by User	221
Analyzing Activity by Document	224
Identifying Checked Out Documents	227
Identifying Inactive Users	229
Analyzing Blog Post Activity	231
Analyzing Activity by Profile Property	233
Analyzing Object Properties	234
Analyzing Site Collection Properties	235
Analyzing Site Properties	239
Analyzing List Properties	243
Analyzing Storage	245
Analyzing Most/Least Storage	246
Analyzing Site Collection Storage	248
Analyzing Site Storage	251
Analyzing Storage Used by a Site's Lists, Libraries, and Files	253
Analyzing Storage Used by Content Databases	255
Analyzing Storage by File Type	258
Analyzing Content of Recycle Bins	259
Finding Duplicate Files	260
Analyzing Content	264
Analyzing Managed Metadata Usage	264
Analyzing Content Types	267
Analyzing SharePoint Workflows	271
Analyzing Broken Links in SharePoint Lists	274
Generating a Solution Summary Analysis	275
Analyzing Web Parts	277
Generating a SharePoint Hierarchy Report	281
Analyzing Trends	283
Auditing Activities and Changes in Your SharePoint Environment	286

Events Captured in SharePoint Logs	286
Analyzing Audit Log Contents	289
Analyzing Change Log Contents	291
Analyzing SharePoint Alerts	292
Analyzing SharePoint Alerts by Site	293
Analyzing SharePoint Alerts by User	294
Analyzing ControlPoint Policies	295
Analyzing Users and Permissions	297
Finding Orphaned Domain Users	298
Analyzing Site Permissions	302
Analyzing Site Lists Permissions	307
Analyzing Permissions by List Item	310
Analyzing Comprehensive Permissions	312
Analyzing Comprehensive Information About SharePoint Users	313
Analyzing SharePoint Groups	317
Analyzing Permissions Changes	321
Generating a User To Group Analysis	322
The ControlPoint Task Audit	325
Viewing Logged Errors	328
Scheduling a ControlPoint Operation	330
How Scheduled Jobs are Handled	330
Scheduling a Recurring Analysis for Which a Specific Date Range or Time Period was Selected	331
Creating a Scheduled Job	333
Generating a Scheduled Jobs Report	337
Monitoring Scheduled Jobs	339
Viewing/Editing a Scheduled Job	343
Viewing a Scheduled Job's History	343
Canceling or Deleting a Scheduled Job	344

Saving, Modifying and Running Instructions for a ControlPoint Operation	346
Saving Instructions	346
Modifying Instructions	347
Running Instructions	347
Configuring a URL for Running Saved Instructions from Outside ControlPoint	348
Using the ControlPoint Governance Policy Manager	351
Launching the ControlPoint Governance Policy Manager	351
Creating a Governance Policy	352
Creating a Governance Policy Scope and Activating the Governance Policy	356
Editing and Deleting Governance Policies and Policy Scopes	357
Using Sensitive Content Manager to Analyze SharePoint Content for Compliance	359
IMPORTANT: Before Using ControlPoint with Sensitive Content Manager	360
Compliance Administrators Group	360
Creating and Managing Sensitive Content Manager Profiles	360
Creating, Editing, and Deleting Sensitive Content Manager Profiles	361
Managing Compliance Search Terms	363
Defining Compliance Action Rules	366
Setting Sensitive Content Manager EndPoints and Managing Scanning Preferences	370
Submitting Content to Sensitive Content Manager	372
Compliance Action Severity Levels	374
How Embedded Files are Handled After a Compliance Scan	374
Managing Sensitive Content Manager Submissions	376
Managing Compliance Action Scan Results	378
Acting on Compliance Analysis Results	380
Managing Scanned Files	384
Analyzing Scanned Files	387
Auditing Compliance Actions	389
Reporting on Sensitive Content Activity	390

Using ControlPoint Sentinel to Detect Anomalous Activity	394
How Personal Daily Activity is Determined	394
Defining Business Hours for Anomalous Activity Detection	395
Defining Anomalous Activity Limits	396
Defining Anomalous Activity Rules	398
Reporting Anomalous Activity	399
Provisioning SharePoint Site Collections and Sites	401
Managing Site Provisioning Profiles	401
Using Custom Templates for Site Provisioning Profiles	404
Making Provisioning Profiles Available to End Users	407
How New Sites and Site Collections Are Requested	410
Managing Site Provisioning Requests	411
Default Menu Options for ControlPoint Users	415
Farm-Level Default Menu Items	415
Web Application-Level Default Menu Items	420
Site Collection-Level Default Menu Items	425
Site-Level Default Menu Items	430
List-Level Default Menu Items	435
User-Level Default Menu Items	438
Site Admin Menu Items	438
Manage ControlPoint Default Menu Items	439
About Us	441
Contacting Quest	441
Technical Support Resources	441

Preface

This guide contains detailed information about Metalogix® ControlPoint, a Web-based application that offers a proactive, integrated solution for managing your SharePoint environment.

Audience

The *Metalogix ControlPoint User's Guide* is intended for individuals who have responsibilities for administering an organization's SharePoint environment and assumes knowledge of SharePoint administrative concepts. Throughout this guide, the following terminology is used to differentiate between three segments of the intended audience:

Farm Administrator - As defined for SharePoint, an administrator who has permissions and responsibilities for all servers within a SharePoint farm and can perform all administrative tasks in the SharePoint Central Administration Web site for the server or server farm.

ControlPoint Application Administrator - A SharePoint administrator who also has responsibilities for managing ControlPoint configuration and permissions. A separate guide, the *Metalogix ControlPoint Administration Guide* is intended specifically for use by ControlPoint Application Administrators when carrying out these tasks.

Administrator - A SharePoint administrator (generally an IT user) who has administrative responsibilities for site collections throughout the farm, but is not necessarily either a Farm Administrator or a ControlPoint Application Administrator.

Business Administrator (also known as a Site Administrator) - A business user responsible for administering his or her own SharePoint sites.

NOTE: Business Administrators have access to many, but not all ControlPoint features. For a complete list of ControlPoint menu options, including those that are not available to Business Administrators, see [Default Menu Options for ControlPoint Users](#).

Getting Started with ControlPoint

Metalogix ControlPoint is a Web-based tool that runs as a SharePoint application and facilitates the management of multiple SharePoint objects (Web applications, site collections, sites, lists, libraries, and items) and users within a SharePoint farm. In addition to enabling you to navigate throughout a SharePoint farm using a single interface, ControlPoint offers a number of powerful search and data analysis tools as well as value-added features not currently available in SharePoint.

Launching ControlPoint

Use one of the following options to start the ControlPoint application.

From your workstation browser:

Enter **http://<server_machine_name>:<port_number> or <hostname>/_layouts/axceler/xcMain.aspx**.

(The server machine name is the name of the machine on which ControlPoint is installed. 1818 is the default port number for the ControlPoint Web application.)

NOTE: If you are a ControlPoint Application Administrator logging in for the first time, complete the login screen using the account that was designated as the ControlPoint Site Collection Administrator account at the time the ControlPoint application was installed.



From the server on which ControlPoint is installed:


- 1 Log into the server using the account that was designated as the ControlPoint Service Account at the time the ControlPoint application was installed.
- 2 From the Windows Start menu, choose **Programs > Metalogix > ControlPoint > Launch ControlPoint Application**.

From within a SharePoint site:

NOTE: You can launch ControlPoint from within a SharePoint site only if the ControlPoint for Site Admins feature and/or the ControlPoint Menus for Site Settings feature has been activated for the site. More information can be found in the *ControlPoint Administration Guide*.

If ...	Then ...
ControlPoint	from the SharePoint Site Settings page or the Site Actions menu, choose Launch

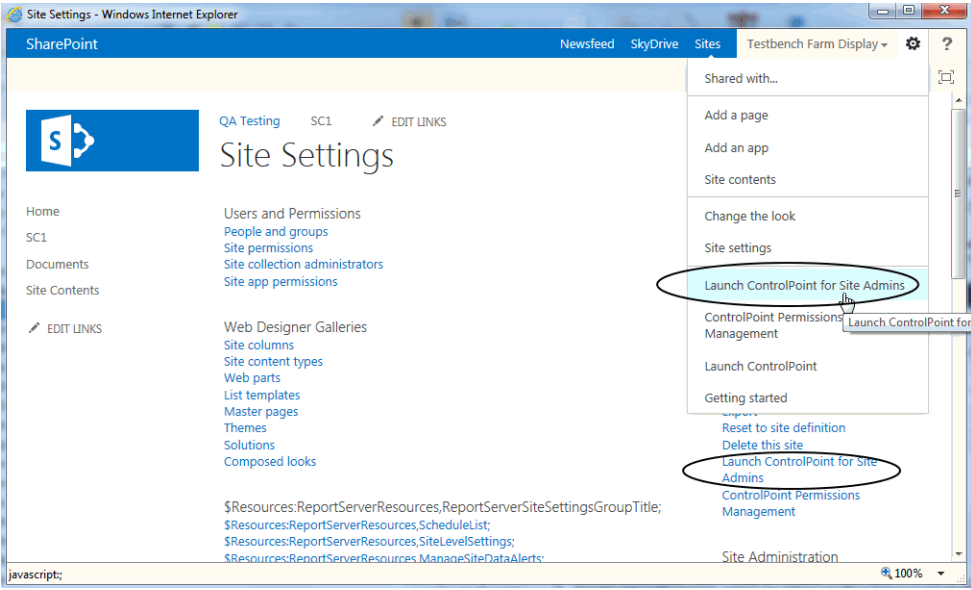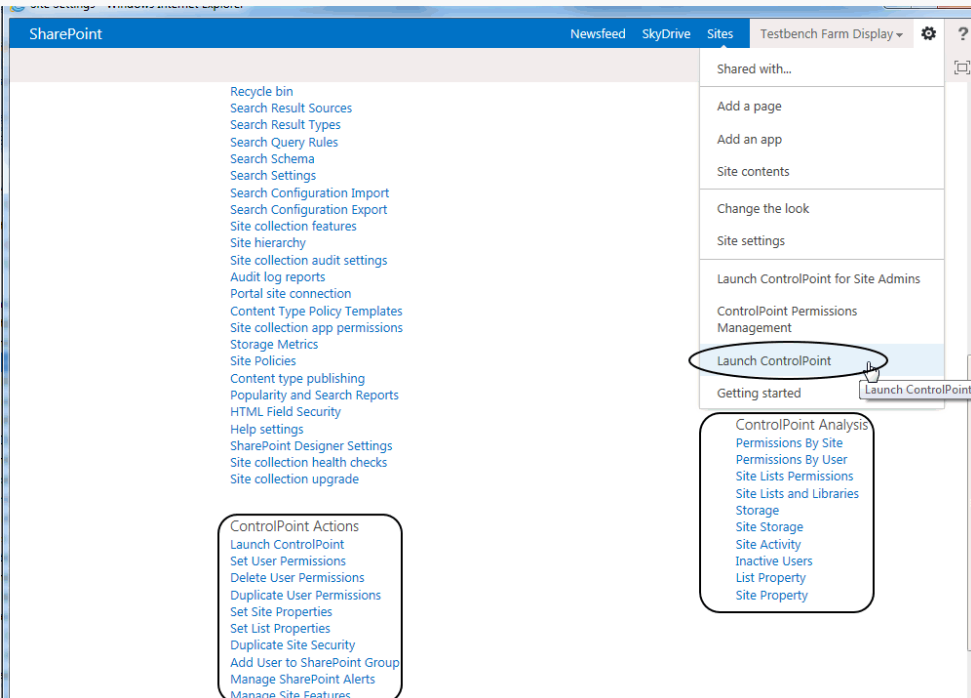If ...	Then ...
<p>for Site Admins has been activated</p>	<p>ControlPoint for Site Admins.</p> 
<p>ControlPoint Menus for Site Settings has been deployed and activated</p>	<ul style="list-style-type: none"> from the Site Settings page, select one of the ControlPoint Actions or a ControlPoint Analysis <p>OR</p> <ul style="list-style-type: none"> from the Site Actions menu, choose Launch ControlPoint. 

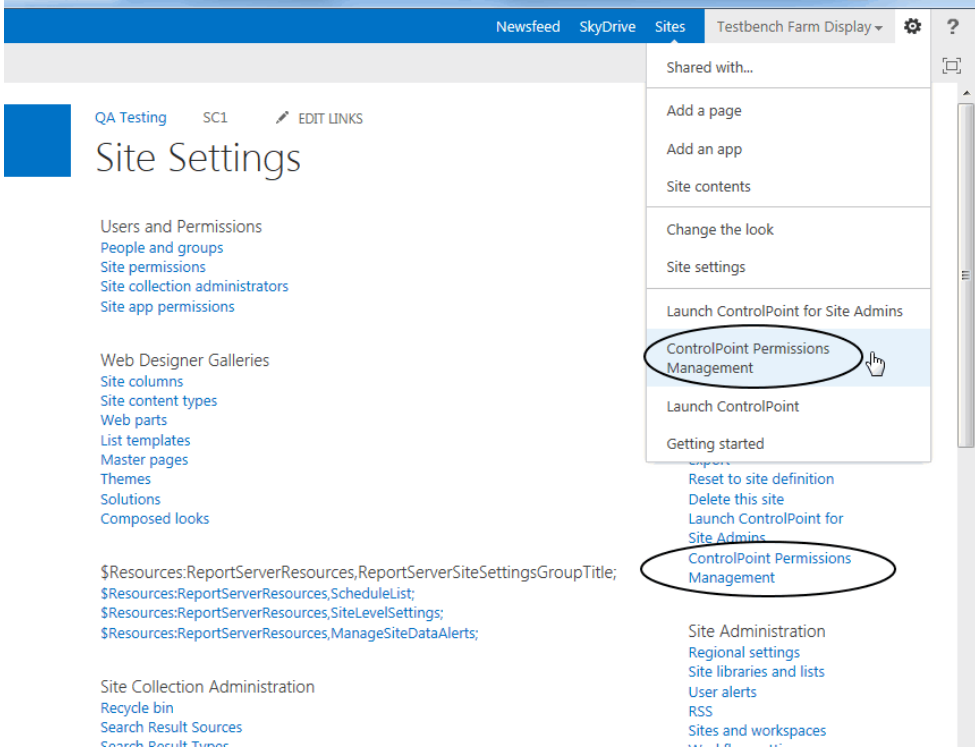If ...	Then ...
ControlPoint Permissions Management for Site Admins has been activated	<p>from the SharePoint Site Settings page or the Site Actions menu, choose ControlPoint Permissions Management.</p> 

The ControlPoint Home Page

For ControlPoint standard installations, whenever you log into ControlPoint or refresh your browser, the right pane displays the SharePoint Summary Dashboard.

NOTE: For non-standard installations, the SharePoint Summary Dashboard is not supported. The right pane displays About information instead.

The SharePoint Summary dashboard contains:

- statistical information about your SharePoint farm


NOTES:

- For performance purposes, statistics are populated with data collected by the ControlPoint Discovery Service and is current as of the last Discovery Service run. Discovery must have been performed at least once for data to be populated.
- If you have upgraded from a version earlier than 8.7, all statistics except Content Database Size are populated from the last Discovery that ran before upgrade. Content Database Size will be populated after the next Discovery run

- quick links to some of ControlPoint's most powerful functionality

NOTE: If a ControlPoint operation is launched from the dashboard, you must select the object(s) on which to perform the operation using the [Change Selection](#) option.

- links to Quest Support as well as ControlPoint user documentation on the Quest website.

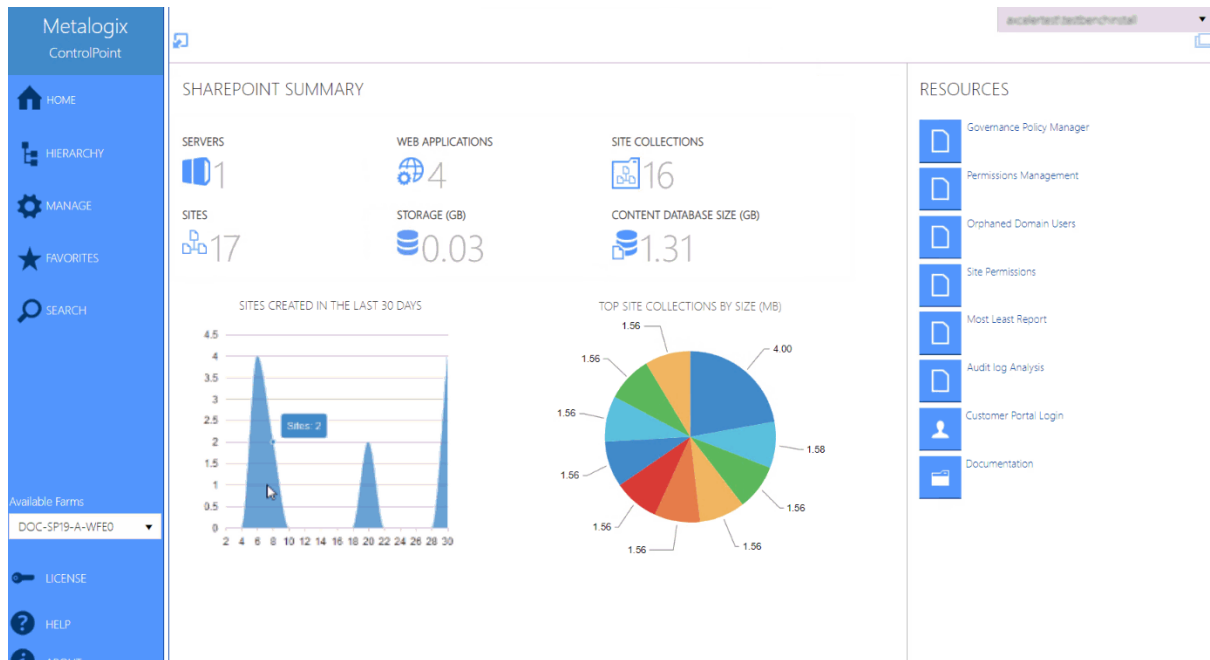


As well as being the default home page, you can invoke the SharePoint Summary dashboard from the SharePoint Hierarchy farm node, by choosing **Farm Summary Dashboard**.

NOTE: This option is not available for non-standard installations.

ControlPoint Application Administrators can:

- customize the page that displays via the ControlPoint Configuration Setting Initial Screen (INITSCREEN). For Standard installations, the ControlPoint Configuration Setting No Dashboard (NODASHBOARD) must also be changed.

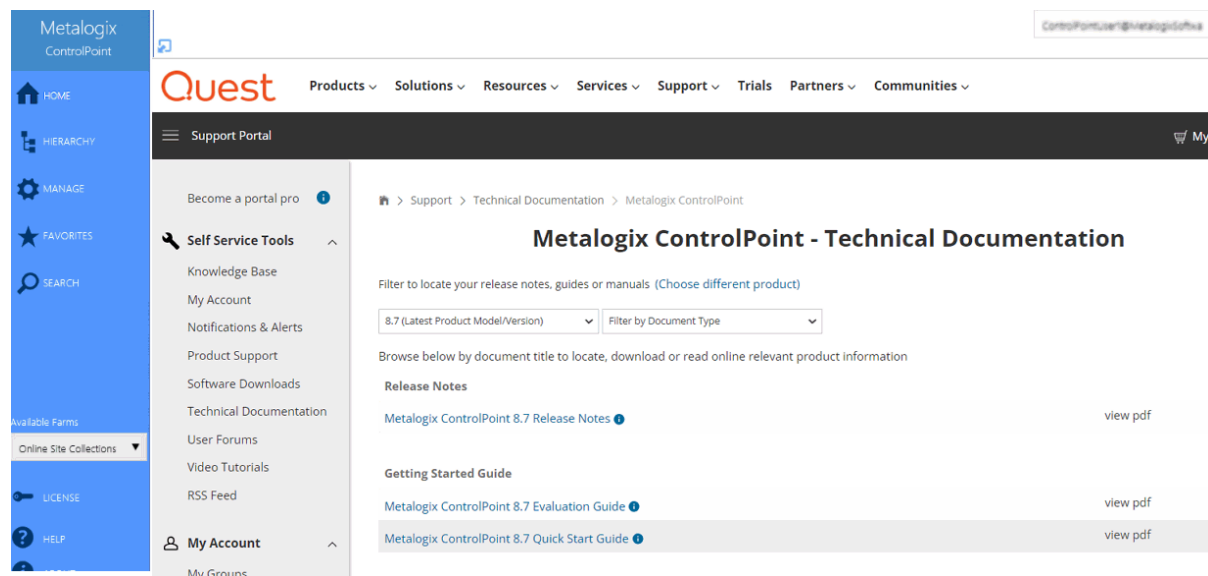

AND/OR

- display a custom banner across the top of the workspace pane.

See the *ControlPoint Administration Guide* for details.

You can return to the home page from anywhere in the application by clicking **Home** in the left navigation pane.

The ControlPoint Configuration Site


The ControlPoint Configuration site is a SharePoint site that is integral to your ControlPoint installation.

This site is used primarily for managing ControlPoint users and permissions and menus that display in the ControlPoint left navigation pane. To manage groups you either need direct rights to manage the groups or be a site collection administrator.


If you are a site collection administrator for the ControlPoint Configuration site collection, you can access the site's administration pages and ControlPoint value-added features from the Hierarchy panel. See [ControlPoint Security](#) for more detail.

If you have sufficient permissions (regardless of whether you are the site collection administrator), you can access the site's home page:

- from the SharePoint Hierarchy tab, by right clicking the ControlPoint Configuration Site - Root Site and choosing **Open Site**.

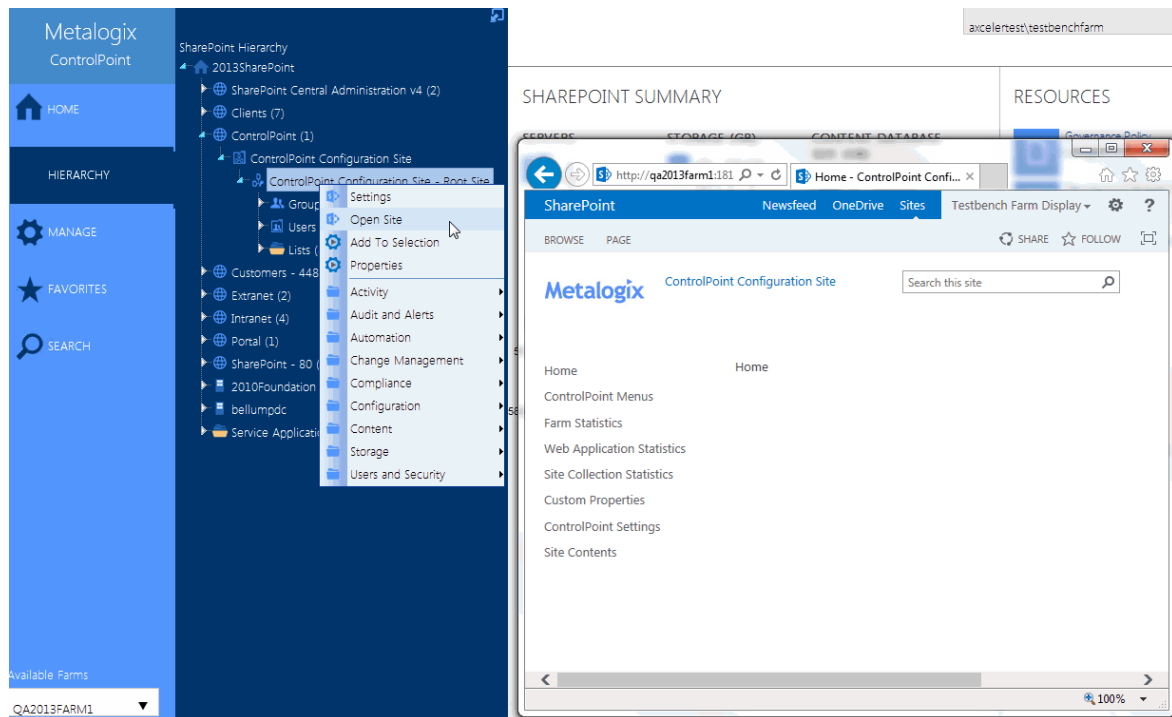

- from the Manage tab, by choosing **ControlPoint Configuration Site**.

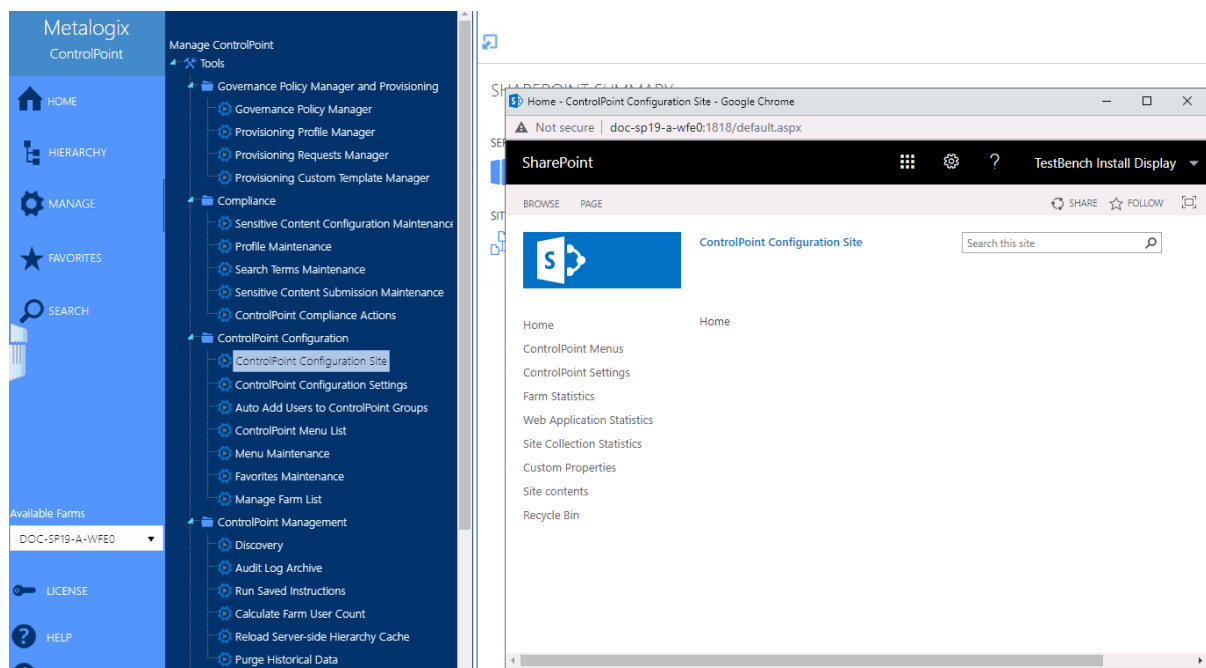













The ControlPoint Interface




The ControlPoint interface employs a two-pane design. From the left (navigation) pane, you can select the SharePoint object(s) on which you want to operate and available functionality. The right

(workspace) pane is where the feature you choose is displayed.

Icons

ControlPoint uses the following icons to identify items that display in the left navigation pane.

Icon	Description
	The SharePoint Farm
	A ControlPoint Search feature See also Searching for SharePoint Sites .
	A SharePoint Web application
	A SharePoint Site collection NOTE: If you are a farm administrator, icons for site collections to which you do not have access may appear grayed out. You can, grant yourself access to these site collections. If you are <i>not</i> a farm administrator (or if the ControlPoint Application Administrator has changed the default configuration to prohibit "super user" privileges for farm administrators), only site collections for which you are a site collection administrator (or site collections that <i>contain</i> sites for which you are an administrator) display. See also ControlPoint Security .
	A Site collection's root site
	A SharePoint Site or Subsite whose permissions are inherited from its parent
	A SharePoint Site or Subsite whose permissions are unique (or not inherited)
	A SharePoint List NOTE: Variations of this icon are used to represent different types of lists (Document Libraries, Calendars, Announcements, and so on).
	A SharePoint page
	SharePoint Users
	SharePoint Groups
	A ControlPoint value-added action

Icon	Description
	A ControlPoint value-added (Visual Analytics) analysis.
	A Server on which SharePoint components are installed
	A SharePoint Server Service

ControlPoint Left Navigation Panels

The standard ControlPoint left navigation frame consists of the following four option sets:

- **SharePoint Hierarchy**
- **Manage ControlPoint**
- **Favorites**
- **Search**


When a ControlPoint operation is initiated—or ControlPoint For Site Admins is launched from within a SharePoint site—the left navigation frame provides access to a set of ControlPoint actions and analyses that can be customized for business administrators.

SharePoint Hierarchy

When **Hierarchy** is selected in the left navigation frame, the SharePoint Hierarchy displays, providing access to the core functionality for managing your SharePoint environment. The navigation tree is designed so that you can visualize the hierarchy of the farm, including:

- Web applications and associated site collections, sites, and sub-sites
- within each site, its associated lists, groups, and individual users
- servers on which SharePoint components are installed, and
- if you are a farm administrator, Service Applications


If a SharePoint component contains child items, a number displays in parentheses (). For example, for a Web application, the number identifies the number of *site collections* it contains, for a site collection, the number of *sites* (excluding the root site), and so on.

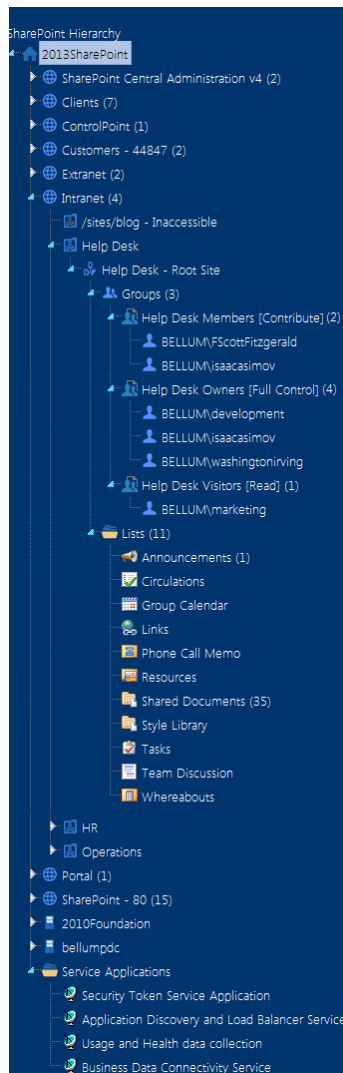

NOTES:


- Unless you are a Farm Administrator and ControlPoint is configured to allow "super user" privileges—or if the ControlPoint Application Administrator has chosen to override default security—only site collections for which you have permissions are visible. (See [ControlPoint Security](#).)
- The number in parentheses represents *all* immediate child items for that object, even those for which you may not have permissions.

Once the number of child objects at any level of the hierarchy exceeds a configurable size (45 by default), the objects are organized and displayed in folders, to improve performance and facilitate navigation. ControlPoint Application Administrators can, however, change this number. (See the *ControlPoint Administration Guide* for details.)

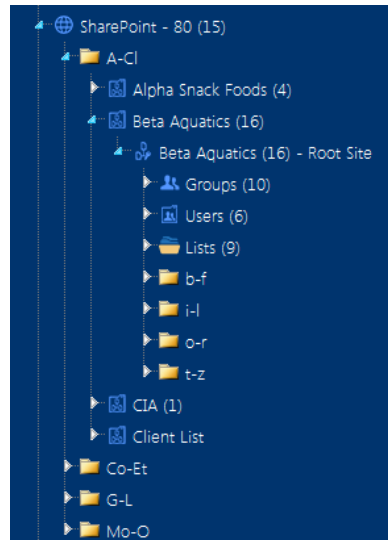

By default, ControlPoint displays site collection and site *titles*. ControlPoint Application Administrators can, however, change this setting so that the site collection and site *urls* display instead. (See the *ControlPoint Administration Guide* for details.)

If a site collection has been locked, text displays to the right of the site collection name which identifies the type of lock that has been imposed.



From most levels of the hierarchy you can access SharePoint pages and ControlPoint value-added features via right-click context menus.


Special Considerations for Multi-Farm Environments

If all farms in a multi-farm environment have the same edition of ControlPoint (Standard, Non-Standard, or Online) installed, any one of the farms can be the home farm, and all farms will display in the SharePoint Hierarchy, which enables you to perform operations on multiple farms.


However, for multi-farm environments that have different editions of ControlPoint installed, some limitations apply if you want to be able to display multiple farms in the SharePoint Hierarchy and perform multi-farm operations.

If the multi-farm installation ...	Then for multiple farms to display in the SharePoint Hierarchy ...
includes ControlPoint Standard along with Non-Standard and/or ControlPoint Online	a Standard farm must be the home farm.
consists of only Non-Standard and ControlPoint Online	a Non-Standard farm must be the home farm.

NOTE: Regardless of whether or not all farms display in the SharePoint Hierarchy, you will always be able to change the active farm by selecting from the Available Farms drop-down.



Additionally, if you log into a multi-farm environment that includes both ControlPoint on premises and ControlPoint Online, you will be prompted to log into ControlPoint Online using your Microsoft Office 365 credentials.

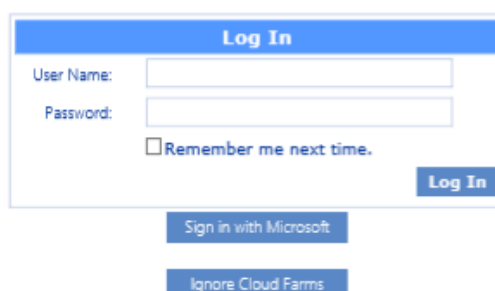


If you want to load on-premises farms only, you can dismiss the dialog by clicking **[Ignore Cloud Farms]**.

Manage ControlPoint

When the **Manage** tab is selected from the left navigation frame, the Manage ControlPoint tree displays, which contains:


- tools for running and reporting on farm-wide ControlPoint operations, and

- depending on your permissions, tools for Managing ControlPoint Configuration and Permissions.

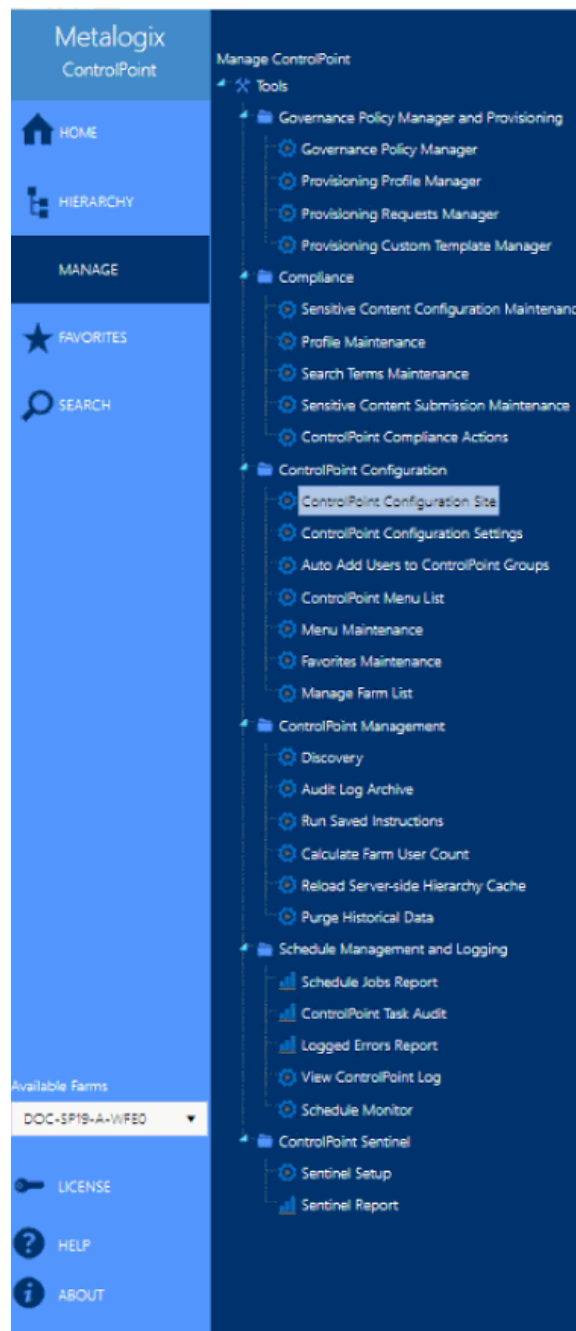

Favorites

From the **Favorites** panel you can quickly access frequently-used ControlPoint features, SharePoint sites, or any website or Web-based application. Individual administrators can configure their own Favorites using the procedure for [Customizing Your Favorites](#).

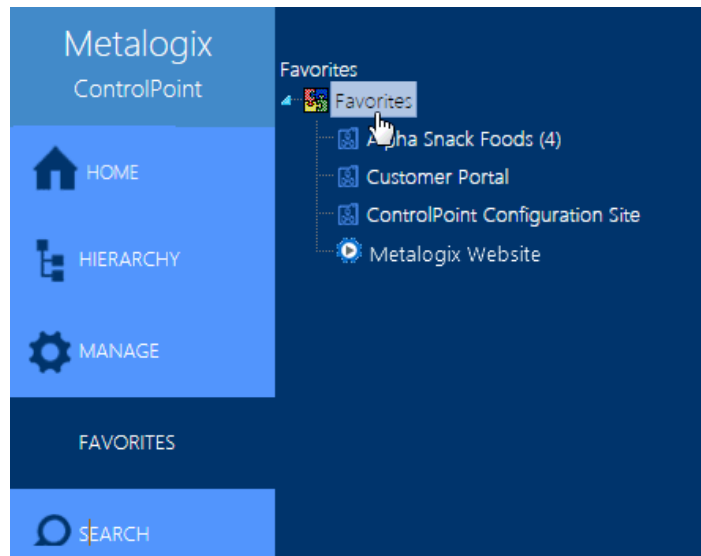


NOTE: In a multi-farm installation, your Favorites is persistent across all farms.

Customizing Your Favorites

Each individual administrator can customize his or her own ControlPoint Favorites list to include frequently-used items, including SharePoint sites and ControlPoint actions and analyses.

When you add Web applications, site collections and sites to your Favorites list, you have access to all of the right-click menu options for which you have permissions.

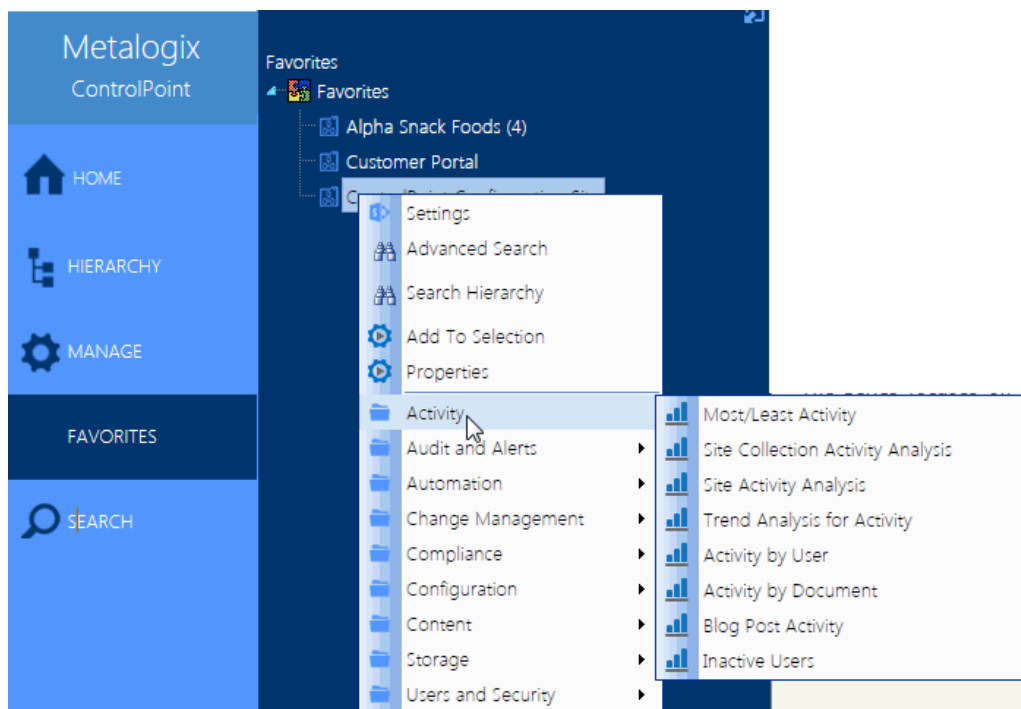


Custom items—such as links to SharePoint pages, internal or external web sites and web-based applications—can also be added.

NOTE: If you use ControlPoint to manage multiple farms, your Favorites will be carried over to every farm.

To access the Favorites Maintenance page:

From the Manage ControlPoint panel, choose **ControlPoint Configuration > Favorites Maintenance**.

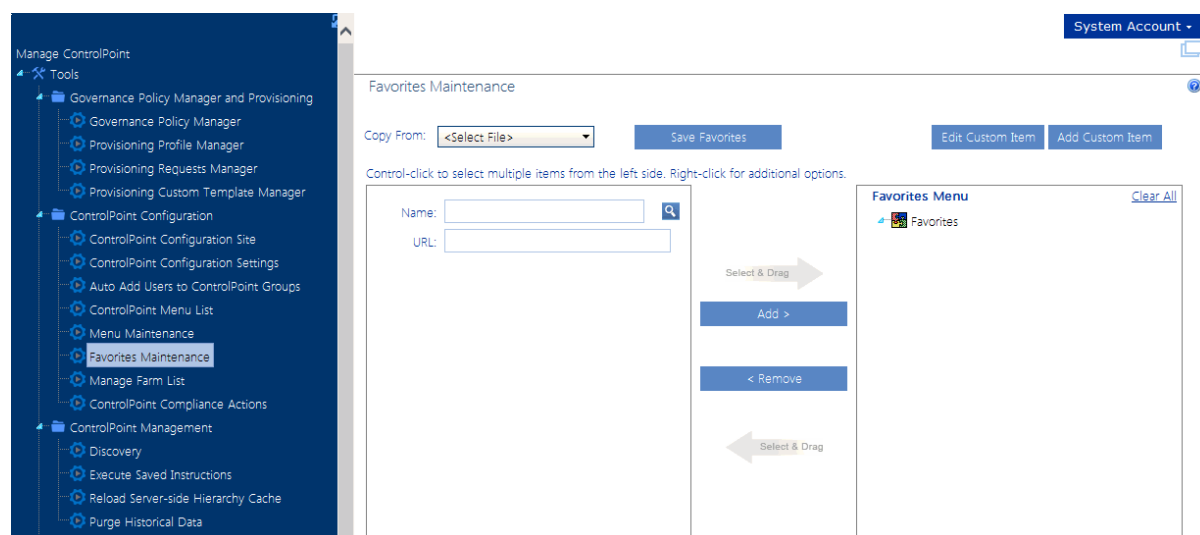

To add items to your Favorites:

- 1 Use the information in the following table to determine the appropriate action to take.

If you want to ...	Then ...
browse the SharePoint Hierarchy for site collections and sites*	from the Copy From drop-down, select Farm . Target Menu:
copy ControlPoint actions and analyses	from the Copy From drop-down, select a menu (.xml) file.

If you want to ...	Then ...
	Note that Tools.xml (and any customized versions of that file) contains the menu items that display only if ControlPoint is configured to display the Actions and Analysis tree as an alternative to Manage ControlPoint.
search for the site collections and sites that you want to add*	enter the site Name and/or URL and search within the SharePoint Hierarchy
add a custom menu item	follow the procedure for Adding and Updating Custom Items in a Menu .

*NOTE: In a multi-farm environment, you can only select items from the home farm (that is, the farm whose URL you used to launch ControlPoint). You can add objects from multiple farms to your Favorites, as long as the farm you *select* them from is currently the home farm.

The screenshot displays the 'Favorites Maintenance' window. At the top, there's a 'Copy From:' dropdown set to 'Farm', and buttons for 'Save Favorites', 'Edit Custom Item', and 'Add Custom Item'. Below this, a search bar prompts the user to 'Click Search to see the tree ->' with input fields for 'Name' and 'URL'. A tree view on the left shows the '2013SharePoint' hierarchy. In the center, there are 'Add >' and '< Remove' buttons flanked by 'Select & Drag' arrows. On the right, the 'Favorites Menu' lists items like 'Alpha Snack Foods (4)', 'Customer Portal', and 'ControlPoint Configuration Site', with a 'Clear All' link at the top right.

- 2 Use the information in the following table to determine the appropriate action to take.

If you want to ...	Then ...
select multiple items individually	hold down the [Ctrl] or [Shift] key and highlight each item you want to add.
immediately add an item and all of its children to the Selected Items column	highlight the item, then right-click and choose Add Item and All Children .
select an item and its immediate children (for example, a site collection and its root site only)	highlight the item, then right-click and choose Highlight Immediate Children . (If objects are grouped into a folder, you must first expand the folder.)

If you want to ...	Then ...
	TIP: You can use this option as a time-saver if you want to add most, but not all of the selected child items. After highlighting the item you can then individually <i>de-select</i> those that you want to exclude.

- 3 To add the highlighted item(s) to the selection list, either:
 - drag and drop the item(s) onto the item below which you want to nest it.
 OR
 - highlight the item below which you want to nest the new item(s) then click the **[Add]** button.

To change the placement of items:

- 1 If you want to move multiple items at once, hold down the **[Ctrl]** or **[Shift]** key and highlight each item you want to move.
- 2 Drag and drop the item(s) onto the item below which you want to nest it.

To remove items:

- 1 In the right pane, highlight the item(s) you want to remove. (To select multiple items, hold down the **[Ctrl]** or **[Shift]** key.
- 2 Do one of the following:
 - drag and drop the item(s) to the left pane.
 OR
 - click the **[Remove]** button.
 - To remove all items in the right pane, click the **Clear All** link.

To save changes to your Favorites:

When you have finished adding items to your Favorites, click **[Save Favorites]**.

IMPORTANT: If you do *not* click **[Save Favorites]** and receive a confirmation dialog, any changes you made will be lost when you navigate away from the page.

Adding and Editing Custom Items in a Menu

From the ControlPoint Menu Maintenance or Favorites Maintenance page you can add and update custom items, such as frequently-accessed SharePoint pages, internal or external Web sites, or web-based applications, to a menu.


The procedure for adding an item to a ControlPoint menu is used by:

- ControlPoint Application Administrators who want to add custom items to a custom menu—via the Menu Maintenance page, and
- any administrator who wants to add custom items to his/her Favorites list—[via the Favorites Maintenance page](#).

NOTE: The procedure below uses Favorites menu maintenance for illustration purposes. However, the procedural steps for ControlPoint application menu maintenance are identical.

To add custom item to a menu:


- 1 Highlight the item *below which* you want to place the new item.

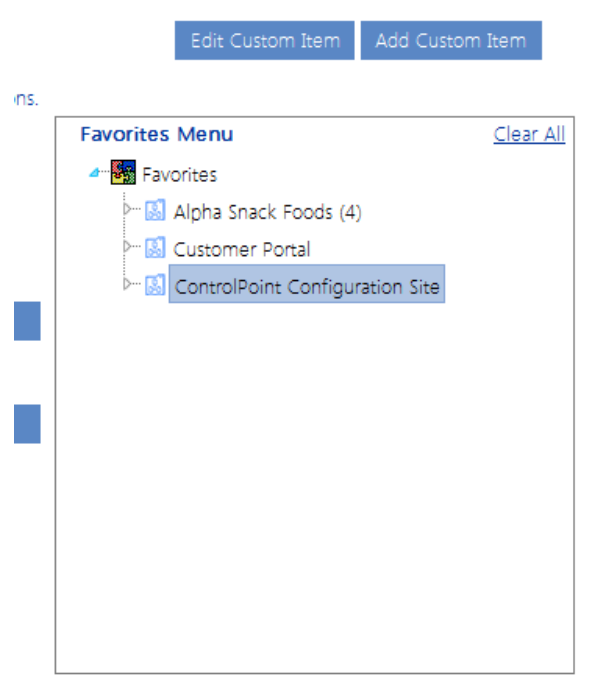

NOTE: Custom *actions* can be placed below the top node of the menu or below a folder. Custom *folders* can be placed below the top node of the menu only.

- 2 Click **[Add Custom Item]**..

- 3 From the **Item Type** drop-down, select the option that best characterizes your custom item.

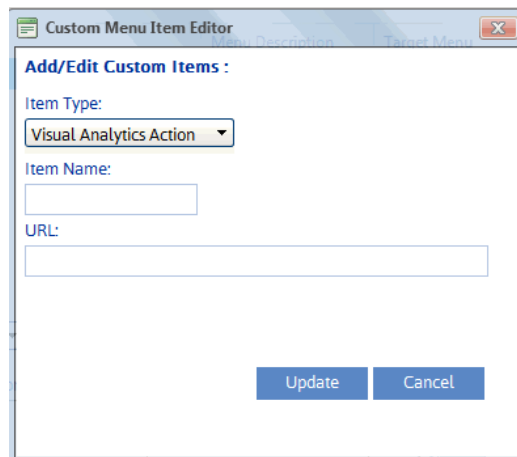

Custom Menu Item Editor

Menu Description Target Menu

Add/Edit Custom Items :

Item Type:
Visual Analytics Action ▼


Item Name:

URL:

Update Cancel

CAUTION: Once a custom item has been saved the Item Type cannot be changed.

- 4 Enter the **Item Name** and, unless the item is a folder, the **URL**.

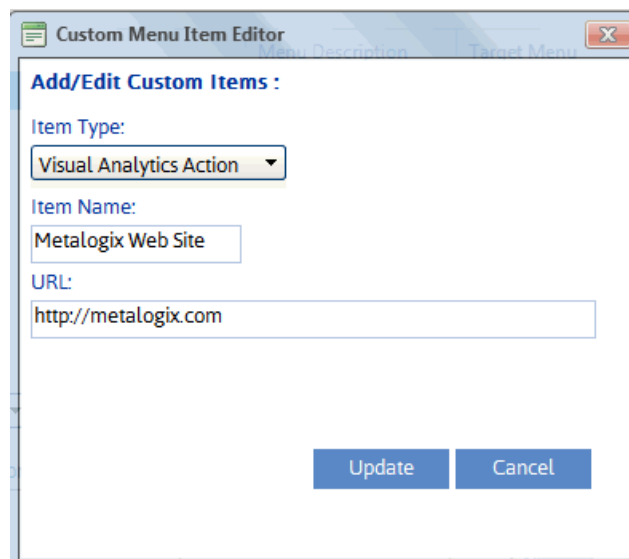

Custom Menu Item Editor

Menu Description Target Menu

Add/Edit Custom Items :


Item Type:
Visual Analytics Action ▼

Item Name:
Metalogix Web Site

URL:
http://metalogix.com

Update Cancel

- 5 Click **[Update]**.

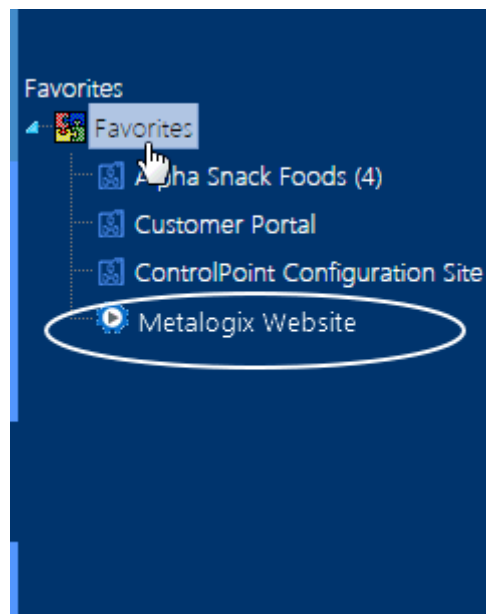

To edit an existing custom item:

- 1 Highlight the item you want to edit.
- 2 Click **[Edit Custom Item]**.
- 3 Modify the **Item Name** and/or **URL** as appropriate.


A screenshot of the 'Custom Menu Item Editor' dialog box. The 'Item Type' dropdown is set to 'Visual Analytics Action'. The 'Item Name' field contains 'Metalogix Web Site'. The 'URL' field contains 'http://metalogix.com'. The 'Update' button is highlighted.

NOTE: For existing items, the **Item Type** drop-down is disabled.

- 4 Click **[Update]**

Search

When Search is selected in the left navigation pane, you can easily locate site collections, sites, and subsites within your SharePoint Farm.

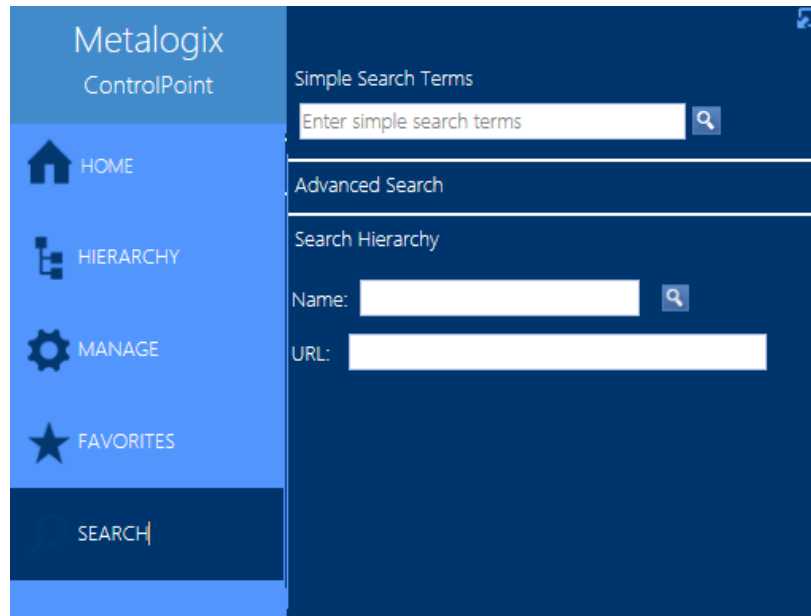


You can access this menu directly or from any of the Search Hierarchy links within the SharePoint Hierarchy panel. For more detail, see [Searching for SharePoint Sites](#).

Menus for Site Admins

If you [launch ControlPoint from within a SharePoint site](#), ControlPoint menus display in place of the "standard" navigation tree. The site from which ControlPoint was launched is used as the default scope. This approach is especially suited for use by Business Administrators.

Select a menu item to open the ControlPoint operation or SharePoint page in the workspace.

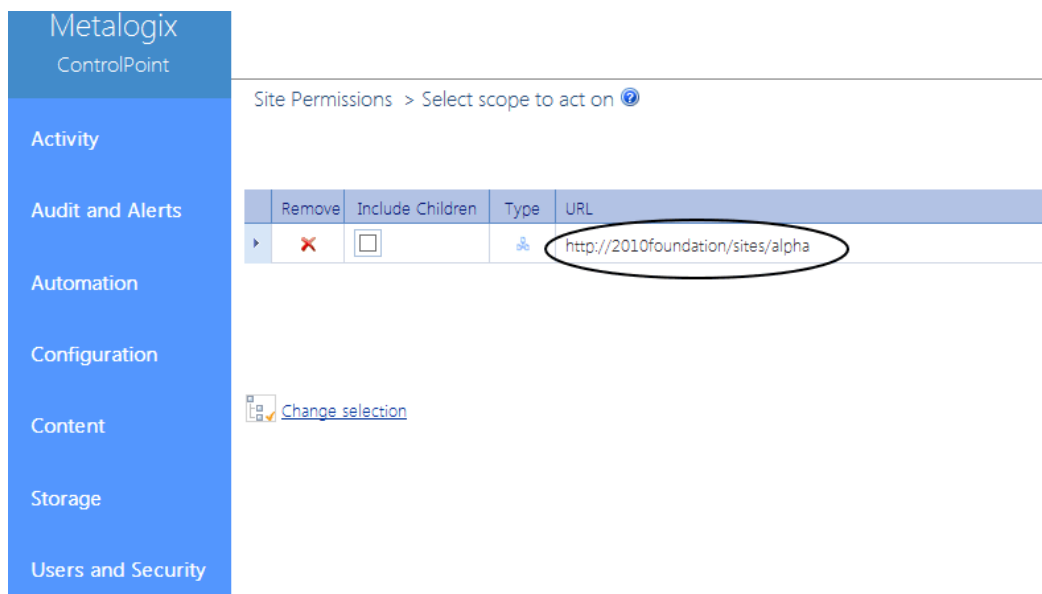


EXCEPTION: If ControlPoint Menus for Site Settings has been activated and you select **Launch ControlPoint** from the Sharepoint Site Actions menu, ControlPoint will open with the standard navigation panels.

Farm Selection, Product Information, and Online Help

The bottom of the left navigation frame contains:


- The **Available Farms** drop-down that identifies the farm currently being managed and, in a multi-farm installation, lets you select a different farm to administer.

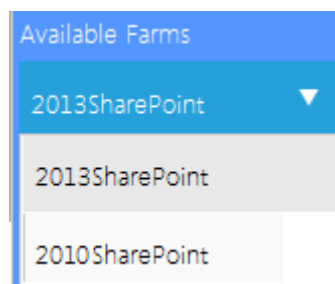

Note that only farms that share the same ControlPoint Service database will be available from the drop-down.

NOTE: Initially, the list includes the names of all farms that have been configured to share the same ControlPoint Service database. However, after the first server interaction (for example, when a ControlPoint action or analysis is initiated), the list may be trimmed to display only farms that are currently active.

- Access to information **About** () the ControlPoint application, including version information

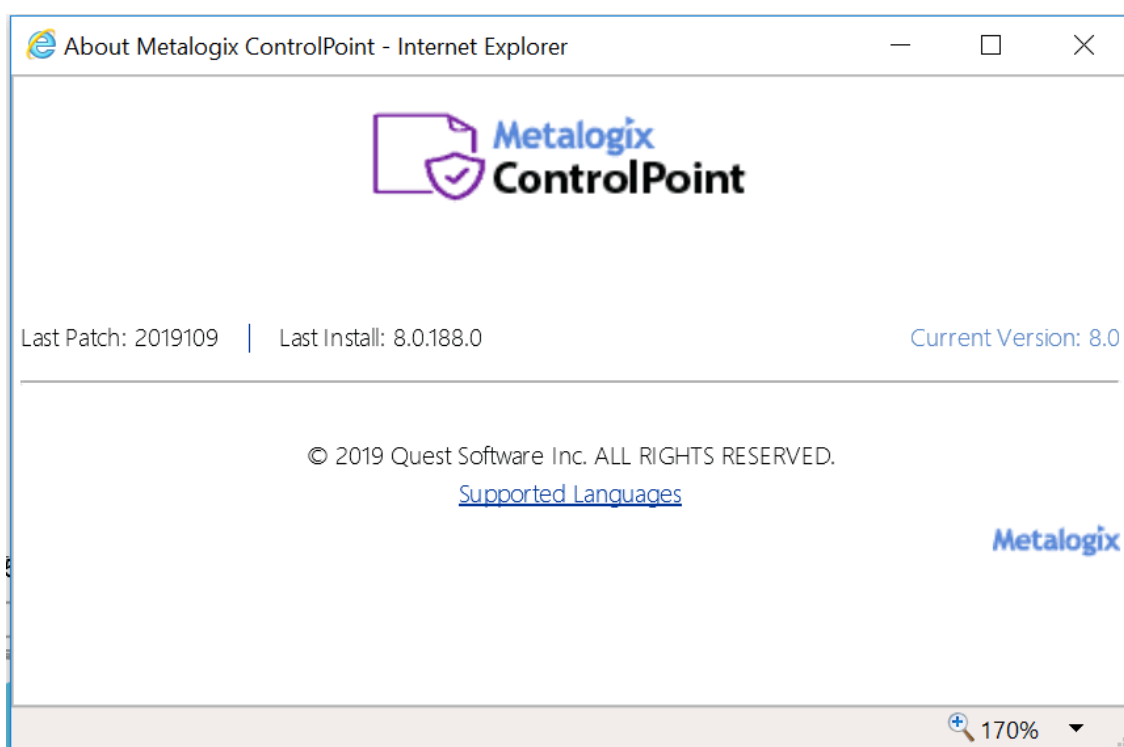

NOTE: **Last Patch** reflects the date of the last software update provided. **Last Install** reflects the last full build of that version released.

- A link to ControlPoint online **Help** (?).


Refreshing the SharePoint Hierarchy

Whenever you take an action that updates the SharePoint Hierarchy (such as adding or deleting a site, changing user permissions, and so on), you can immediately view changes in the SharePoint Hierarchy navigation tree by using the **Refresh SharePoint Hierarchy** menu option.

NOTE: This option is a faster, more efficient alternative to using the browser's refresh button if you want to update only the SharePoint Hierarchy navigation tree rather than the entire page or active workspace. It is important to note, however, that when you refresh the SharePoint Hierarchy, the browser's cache of previously-accessed items will be cleared (that is, the next time you access an item, ControlPoint will have to take the time to reload it).

To refresh the SharePoint Hierarchy:

In the SharePoint Hierarchy panel, right-click on the farm name and choose **Refresh SharePoint Hierarchy**.

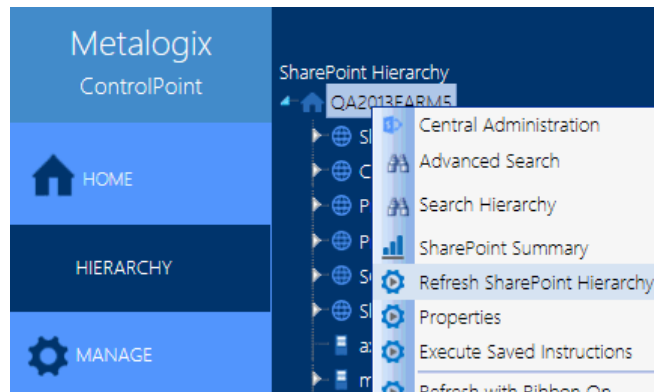

In a multi-farm environment, each SharePoint Hierarchy is refreshed independently, from its own menu, and the method you select is persistent until you change it.

NOTE: When you refresh the SharePoint Hierarchy, any changes to ControlPoint menus will be viewable as well.

Reloading the Server-Side Hierarchy Cache

If the ControlPoint Application Administrator has configured ControlPoint to load site collections in the SharePoint Hierarchy from a server-side cache rather than in real-time, you can reload the server-side cache on an as-needed basis (for example, if a site collection has just been added or deleted) as follows:

From the Manage ControlPoint tree, choose **ControlPoint Management > Reload Server-side Hierarchy Cache**.

CAUTION: A reload of the server-side cache is a resource-intensive process that may affect application performance for *all* ControlPoint users.

This action will have no effect if the ControlPoint Configuration Setting PRELOADSITECACHE is set to **false**.


After reloading the server-side cache, you will need to [refresh the SharePoint Hierarchy](#) to clear the browser-side cache as well.

Opening a ControlPoint Workspace in a New Window or Tab

You can create a dedicated workspace for a particular task by opening it in a separate window or tab (depending on your browser version). This enables you to navigate to other areas of the ControlPoint interface without having to navigate *away* from a task in progress. You can even create workspaces to manage multiple ControlPoint operations simultaneously.

NOTE: You invoke the workspace after you have selected a function, but before you have entered data, taken an action, or displayed results. (That is, the new workspace will only display a function in its initial state.)

To open a ControlPoint workspace in a new window or tab:

- 1 [Select the object\(s\) on which you want to perform an operation.](#)
- 2 Choose the applicable menu option.
- 3 From the ControlPoint application header, click the Clone Work Area icon ().

ControlPoint User Groups

When ControlPoint is installed for the first time:

- the six default user groups described in the table below are automatically created, and
- the ControlPoint Service Account is added to each group.

Group	Description	Default ControlPoint Configuration Site Permission(s)
ControlPoint Application Administrators	Individuals within IT responsible for the administration of the ControlPoint application, as well as most or all of the farm.	Full Control access NOTE: You should also place administrators in this group into the Site Collection Administrators group to enable them to manage other ControlPoint groups.
Administrators	Individuals (generally within IT) with administrative responsibilities for most or all of the farm.	Read access
Business Administrators It is imperative that the name assigned to this group match the parameter value for the BADMIN configuration setting. If you change this group name, you will also need to update the BADMIN parameter value. Refer to the <i>ControlPoint Administration Guide</i> for instructions.	Business users responsible for managing specific sites, but not most of the farm. See also Making ControlPoint Available to Business Users (Site Administrators) .	Read access
Remote Service Account Administrators	The Service Account of each farm involved in	Read access

Group	Description	Default ControlPoint Configuration Site Permission(s)
It is imperative that the name assigned to this group match the parameter value for the RSAADMIN configuration setting. If you change this group name, you will also need to update the RSAADMIN parameter value. Refer to the <i>Metalogix ControlPoint Administration Guide</i> for instructions.	<ul style="list-style-type: none"> multi-farm installations, and cross-farm copy or move operations. 	
ControlPoint Compliance Administrators	Individuals permitted to access ControlPoint Compliance (Sensitive Content Manager) functionality.	Read access

You can add users to ControlPoint groups using either of the following methods:

- Use standard SharePoint procedures. You can open the ControlPoint Configuration Site directly or access People and Groups pages through the ControlPoint application interface as follows:
 - From the SharePoint Hierarchy, expand the Web Application that hosts the ControlPoint Configuration site, then **ControlPoint Configuration Root Site > Groups**.
 - Click on the group to which you want to add users.

OR

- Use the ControlPoint action [Add Users to SharePoint Groups](#).

ControlPoint Application Administrators can create additional groups at any time, configure ControlPoint to automatically add users to a ControlPoint group based on security privileges, and even create custom ControlPoint menus for different groups of administrators. See also [Managing ControlPoint Users and Permissions](#) in the *ControlPoint Administration Guide*.

Making ControlPoint Available to Business Users (Site Administrators)

ControlPoint Application Administrators can grant access to ControlPoint to business users who administer their own sites. To do so:

- make sure they have Full Control access (or any other permission level that includes the Manage Web Site permission) to any site they will be administering, and

- add them to the ControlPoint Business Administrators group in the ControlPoint Configuration site. (See [ControlPoint User Groups](#).)

Once the [ControlPoint Discovery](#) process has run, the SharePoint Hierarchy will show only Web applications and site collections that contain sites that the user has permissions to administer.

NOTE: For the sake of performance, ControlPoint uses cached data to determine SharePoint sites to which Business Administrators have management permissions. If you grant or deny permissions to a Business Administrator, the change will not be visible in the SharePoint Hierarchy until after the next Discovery job is run.


ControlPoint Security

By default, ControlPoint is security-trimmed to enforce SharePoint permissions. This means that administrators only have full access to site collections through ControlPoint if:

- they have been given site collection administrator privileges in SharePoint
- they have Full Control permissions granted to all zones in a Web application's policy.


EXCEPTION: The security model for business users (also referred to as Site Administrators) is somewhat different. See [Making ControlPoint Available to Business Users \(Site Administrators\)](#).

For users who are farm administrators, all of the site collections for which they are not the administrator may display in the SharePoint Hierarchy panel with a "disabled" icon. As farm administrators, they can give themselves permissions to those site collections via the ControlPoint [Set Site Collection Properties](#) action, which displays when the site collection icon is double-clicked.

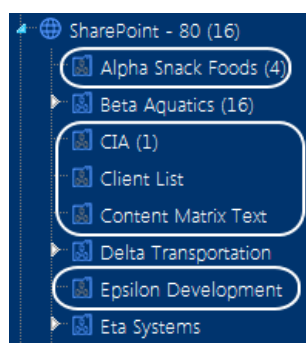

For users who are *not* farm administrators (or are farm administrators but ControlPoint has been configured to suppress "super user" privileges), only site collections for which they are administrator display.

NOTE: The number that displays in parentheses represents the total number of site collections within the Web application, regardless of whether you have permissions for them.

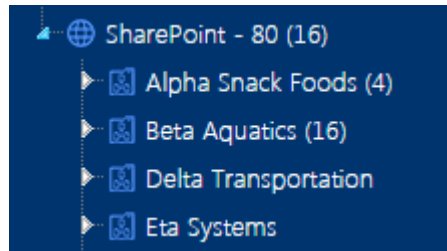

ControlPoint users can also manage sites for which they have a permission level that includes the fine-grained permission ManageWebSite (which is part of the SharePoint built-in permission level Full Control). Unless the user is a member of the Business Administrators group, these sites do not display in the SharePoint Hierarchy unless the user is also the administrator of the site collection. Such sites would, however, be included in a ControlPoint operation if they are [within the selected scope](#) and can be selected via a [simple, advanced, or hierarchical search](#).

ControlPoint Application Administrators can, however, choose to override ControlPoint default security. Details can be found in the *ControlPoint Administration Guide*.


Selecting Objects on Which to Perform a ControlPoint Operation

Selecting Objects from the SharePoint Hierarchy, Favorites, or Search Hierarchy Panel

From the SharePoint Hierarchy, Favorites, or Search Hierarchy panel, you can select one or more objects on which to perform a ControlPoint search, action, or analysis. You can select the entire farm, individual Web applications, site collections, sites, lists, and/or users.

To select multiple objects, hold down either the **[Ctrl]** or **[Shift]** key and left-click on each item you want to include in your selection. (To clear all selected object(s), left-click on any item that is *not* currently selected.)

After selecting the object(s), right-click to display a menu from which you can choose the operation you want to perform.

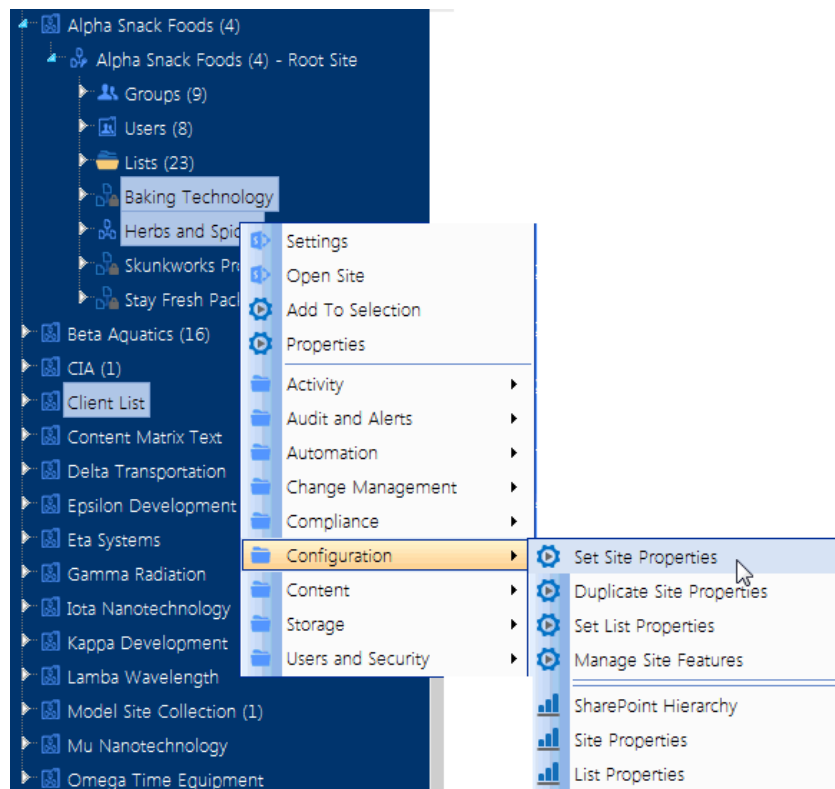


NOTE: The options available and the scope of the operation depends on the following factors:

- The level of the hierarchy from which you select the object(s) . For example, you can select objects at different levels of the hierarchy if the operation allows it. If you attempt to select objects from different levels when an operation does not allow it (for example, you have selected both site collections and sites then try to initiate a Site Collection Property Report), only the relevant objects will apply. Similarly, if you select multiple objects then choose an option that is only valid for a single object (such as copying or moving a site), only the object on which you right-click will apply.
- In a multi-farm environment involving different editions of ControlPoint (Standard, Non-Standard, and/or ControlPoint Online), whether the operation is valid for all editions in the selection. For example, if you select site collections in both Standard and Online farms and invoke an Activity analysis, ControlPoint will exclude any Online farms from the selection when the operation is run, as activity analyses are currently not available for ControlPoint Online.

If you selected an operation that can be performed on *items* within a list, select the list(s), choose the operation, then follow the procedure for [Selecting List Items on Which to Perform a ControlPoint Operation](#).

Selecting Objects from within a SharePoint site

If you have launched ControlPoint from within a SharePoint Site, that site is pre-selected as the default scope.

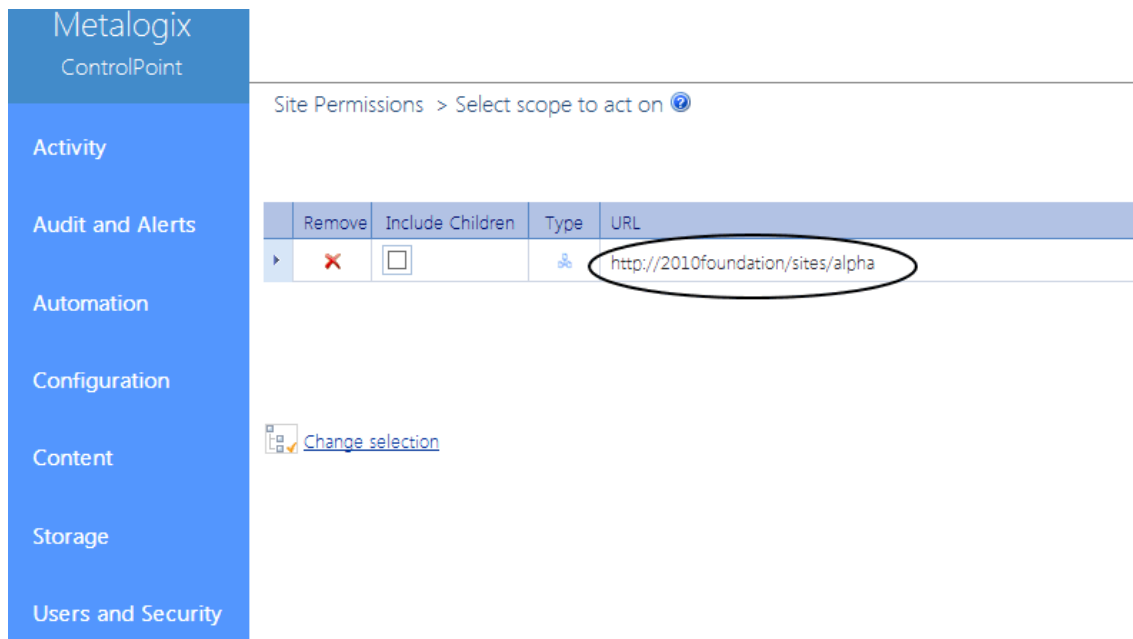

Selecting Items from Search or Data Analysis Results

You can also select one or more objects on which to perform an operation from simple/advanced search or data analysis results. For details, see [Acting on Search or Data Analysis Results](#).

The Workspace Selection Section

Once you have initiated a ControlPoint operation, the object(s) you selected display in the **Selection** section of the workspace. Information that displays in the Selection table includes an icon identifying the item's **Type** (that is, farm, Web application, site collection, or site/subsite) and the **URL**

Generally, if you selected at the farm, Web application, or site collection level, all child items are included by default, as indicated by a check mark (✓) in the **Include Children** column. Because these items are simply "containers" for the actual sites and subsites on which you want to perform the operation (that is, for most operations you cannot act on these items themselves), the assumption is that if you selected at one of these levels you intended to include all children.

Activity by User > Select scope to act on Next, define parameter(s) to act on >

Farm-level Selection

	Remove	Include Children	Type	URL
▶		<input checked="" type="checkbox"/>		http://2010foundation:1919/

SELECTION

PARAMETERS

SCHEDULE

RESULTS

Web Application-level Selection

	Remove	Include Children	Type	URL
▶		<input checked="" type="checkbox"/>		http://clients/
▶		<input checked="" type="checkbox"/>		http://extranet:28733/
▶		<input checked="" type="checkbox"/>		http://2010foundation:40042/

SELECTION

PARAMETERS

SCHEDULE

RESULTS

Site Collection-level Selection

	Remove	Include Children	Type	URL
▶		<input checked="" type="checkbox"/>		http://2010foundation/sites/alpha
▶		<input checked="" type="checkbox"/>		http://2010foundation/sites/beta
▶		<input checked="" type="checkbox"/>		http://2010foundation/sites/delta

SELECTION

PARAMETERS

SCHEDULE

RESULTS

If you selected at the site or subsite level the **Include Children** column is unchecked by default. The assumption is that you have explicitly selected only those sites and subsites on which you want to act. You can however, **Include Children** by checking this box.

Site-level Selection

	Remove	Include Children	Type	URL
▶		<input type="checkbox"/>		http://2010foundation/sites/alpha
▶		<input type="checkbox"/>		http://2010foundation/sites/alpha/skunkworks
▶		<input type="checkbox"/>		http://2010foundation/sites/beta/bravo

SELECTION

PARAMETERS

SCHEDULE

RESULTS

At the list level you may or may not be able to include children, depending on whether the operation can be performed on individual items. See also [Selecting List Items on Which to Perform a ControlPoint Operation](#).

Remove	Include Children	Type	URL
<input checked="" type="checkbox"/>		Folder	http://2010foundation/sites/alpha/Shared Documents/Forms/AllItems.aspx
<input checked="" type="checkbox"/>		Folder	http://2010foundation/sites/alpha/Project Documents/Forms/AllItems.aspx
<input checked="" type="checkbox"/>		Folder	http://2010foundation/sites/beta/Shared Documents/Forms/AllItems.aspx

Remove	Include Children	Type	URL
<input checked="" type="checkbox"/>	<input type="button" value="Choose"/>	Folder	http://2010foundation/sites/alpha/Shared Documents/Forms/AllItems.aspx
<input checked="" type="checkbox"/>	<input type="button" value="Choose"/>	Folder	http://2010foundation/sites/alpha/Project Documents/Forms/AllItems.aspx
<input checked="" type="checkbox"/>	<input type="button" value="Choose"/>	Folder	http://2010foundation/sites/alpha/baking/Shared Documents/Forms/AllItems.aspx

NOTE: Because the Central Administration Web application, site collection and site serve a special purpose, many ControlPoint operations cannot be performed on Central Administration. If Central Administration is within the scope of a selection (for example, you selected the entire farm), ControlPoint will automatically exclude it from the operation.

After you have made your selection, you can:

- see more detail about an object (specifically, the **Name**, number of immediate child objects, and **Path**, by expanding the row.

Remove	Include Children	Type	URL
<input checked="" type="checkbox"/>	<input type="button" value="Choose"/>	Folder	http://2010foundation/sites/alpha/Shared Documents/Forms/AllItems.aspx
<div> <div>Name: ***Shared Documents (120)</div> <div>Path: 2013SharePoint > SharePoint - 80 > Alpha Snack Foods >> Alpha Snack Foods</div> </div>			
<input checked="" type="checkbox"/>	<input type="button" value="Choose"/>	Folder	http://2010foundation/sites/alpha/Project Documents/Forms/AllItems.aspx

- remove one or more items from the Selection pane, by clicking the Remove icon (☒)
- at the site level, explicitly select or de-select child objects, by checking/unchecking the Include Children box
- change the selected scope using the procedure for [Changing Your Selection](#).

NOTE: If you originally selected one or more lists and the operation can be performed on individual items, the Selection section includes additional options. See [Selecting List Items on Which to Perform a ControlPoint Operation](#).


Changing Your Selection

After selecting objects on which to perform a ControlPoint operation, you can add or remove objects using the Change Selection feature.

NOTE: If you chose an operation designed to work on a single object (such as Copy/Move), the Change selection option will not be available.

You can also add individual objects to your current selections using the Add to Selection menu item. See [Adding Objects from the SharePoint Hierarchy to Your Selection](#).


To access the Change Selection pane:

In the Selection section of the work area, click the **Change selection** icon ().

The Change Selection pane displays, which consists of two sections:

- the **Available Items** section lists all of the objects available for selection (as determined by the scope of your original selection)
- the **Selected Items** section lists currently-selected objects.


Typically, all child items (site collections, sites, and subsites) are included in the scope by default, as indicated by a check mark to the left of the item in the Selected Items section.

Manage Audit Settings > Select scope to act on 

[Next, define parameter\(s\) to act o](#)

Control-click to select multiple items from the left side. Right-click for additional options.


Check check-boxes to include all children of the item.

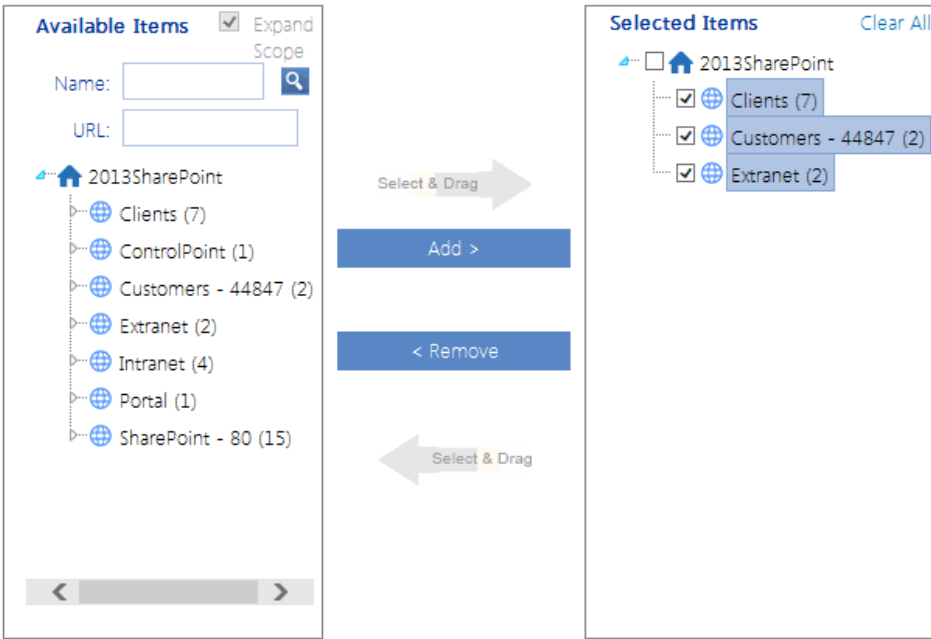

The screenshot shows the 'Change Selection' pane with two main sections: 'Available Items' on the left and 'Selected Items' on the right. The 'Available Items' section has a search bar with 'Name:' and 'URL:' fields, an 'Expand Scope' checkbox, and a list of items under '2013SharePoint': Clients (7), ControlPoint (1), Customers - 44847 (2), Extranet (2), Intranet (4), Portal (1), and SharePoint - 80 (15). The 'Selected Items' section has a 'Clear All' link and a list of items: 2013SharePoint, Clients (7), Customers - 44847 (2), and Extranet (2). Between the sections are 'Add >' and '< Remove' buttons, and arrows labeled 'Select & Drag'. At the bottom are 'Apply' and 'Cancel' buttons.

Apply Cancel

If your selection includes multiple farms, note that previously **Selected Items** from remote farms display, but only objects from the home farm are selectable from the **Available Items** list.

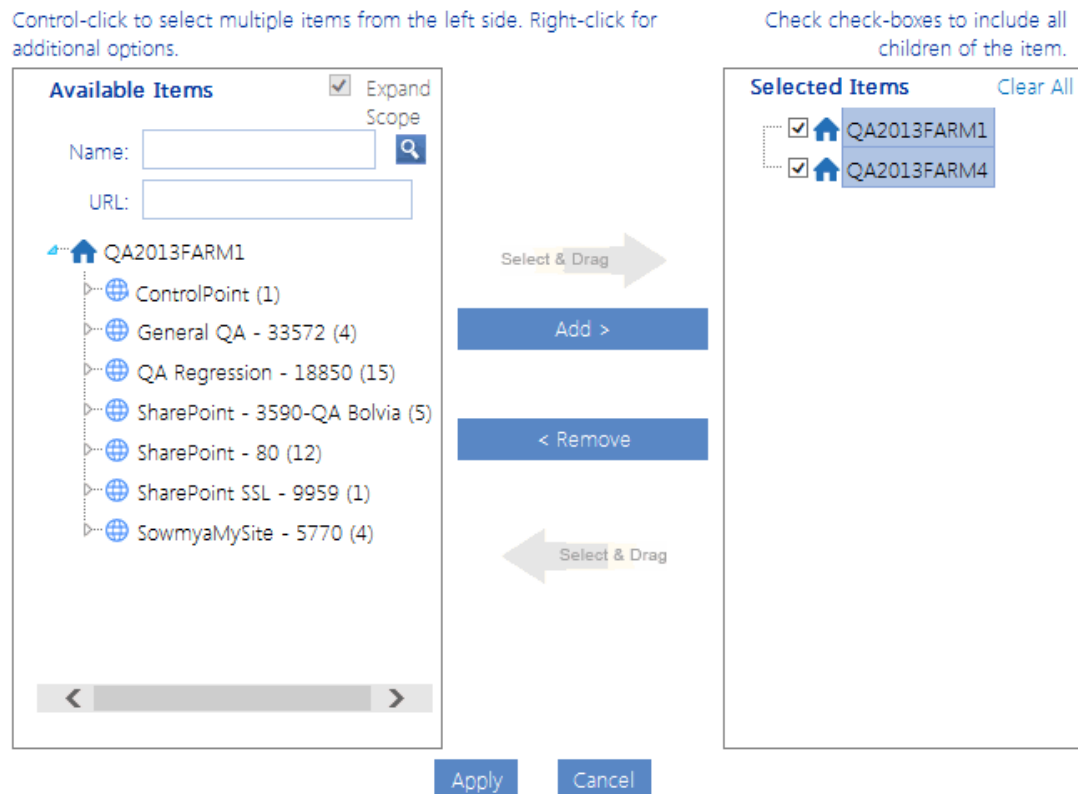


The level to which you can drill down in the Available Items list depends on the action that you want to perform.

EXAMPLES:

If you chose **Set Site Collection Properties** which, by definition, applies only to site collections, you cannot drill down beyond the site collection level.

Set Site Collection Properties > Select scc


Control-click to select multiple items from the additional options.

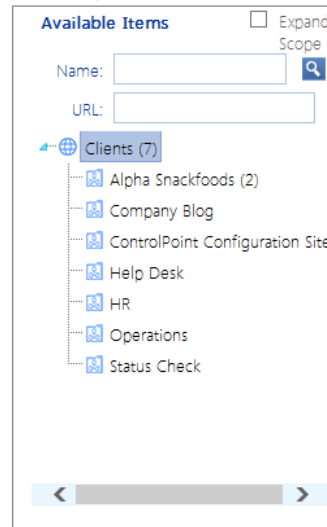

- If you chose **Set Site Properties**, you can drill-down and select individual sites within the collection.


Set Site Properties > Select scope to act on

Control-click to select multiple items from the left si options.

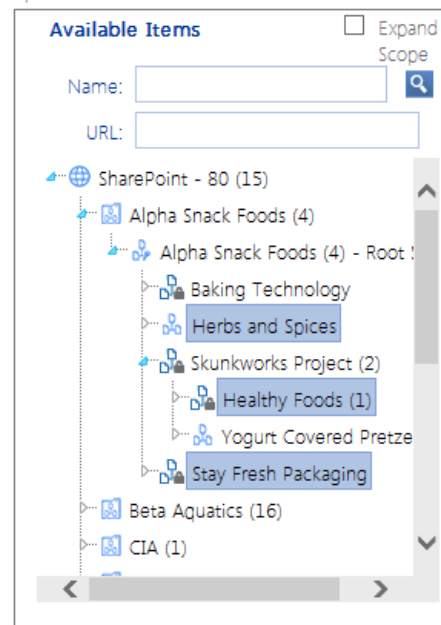

To modify the list of available items:

Use the information in the following table to determine the appropriate action to take.

If you want to ...	Then ...
expand the scope of available items to encompass the farm	<p>check the Expand Scope box.</p> <p>NOTE: If you originally selected the farm, multiple Web applications, or site collections within multiple Web applications, Expand Scope is checked by default and all available items in the farm display.</p>
narrow the scope of available items	<ul style="list-style-type: none">• enter a full or partial site Name and/or URL , and• click the magnifying glass icon (). <p>NOTE: By default, ControlPoint uses real-time data for this type of hierarchical search. However, to enable faster searches in large environments, ControlPoint Application Administrators can configure the application to use cached data for hierarchical searches.</p>

To modify the Selected Items list:

- 1 Uncheck the "include all children" box to the left of each object whose scope you want to modify.
- 2 In the **Available Items** list, select each object that you want to include. Use the information in the following table for guidance.

If you want to ...	Then ...
select multiple items individually	hold down the [Ctrl] or [Shift] key and highlight each item you want to add.
immediately add an item and all of its children to the Selected Items column	highlight the item, then right-click and choose Add Item and All Children .
select an item and its immediate children (for example, a site collection and its root site only)	<p>highlight the item, then right-click and choose Highlight Immediate Children. (If objects are grouped into a folder, you must first expand the folder.)</p> <p>TIP: You can use this option as a time-saver if you want to add most, but not all of the selected child items. After highlighting the item you can then individually <i>de-select</i> those that you want to exclude.</p>


- 3 To add the highlighted item(s) to the selection list, do one of the following:

- drag and drop the item(s) to the Selected Items column. ControlPoint will automatically place them in the correct location in the tree.


OR

- click the **[Add]** button.

Note that if a checkbox displays to the left of a selected item (indicating that you want to include *all* child items), those child items do not display explicitly in the Selected Items list.

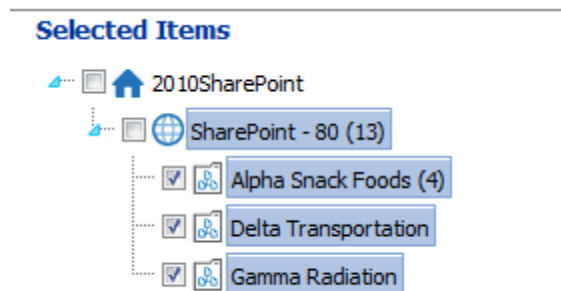

If you uncheck this box then add child items using the procedure above, however, each item you add *will* display explicitly in the list.

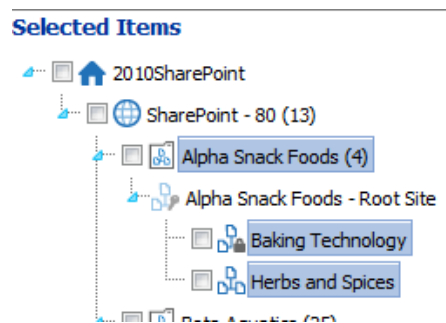

To remove items from the Selected Items list:

- 1 In the Selected Items list, highlight each item that you want to remove. Hold down the **[Ctrl]** or **[Shift]** key to highlight multiple items individually.
- 2 Either:
 - drag and drop the items to the **Available Items** column.

OR

 - click the **[Remove]** button.

Applying changes to the selection list:

When you have finished updating the Selected Items list, click **[Apply]**.

The Customize Selection pane is closed and the Selection list is updated to reflect your changes.

	Remove	Include Children	Type	URL
▶	✖	<input type="checkbox"/>	📁	http://2010foundation/sites/alpha/baking
▶	✖	<input type="checkbox"/>	📁	http://2010foundation/sites/alpha/spices
▶	✖	<input type="checkbox"/>	📁	http://2010foundation/sites/beta/bravo
▶	✖	<input type="checkbox"/>	📁	http://2010foundation/sites/beta/delta


Selecting List Items on Which to Perform a ControlPoint Operation

Some ControlPoint operations can be performed on individual items within a list or library. If the option to act on folders/items is available, a **Choose** link displays in the Include Children column for the list. (If you do not select individual folders/items, the operation will be performed on the list itself.)

NOTE For a multi-farm operation, you can only choose items from lists in the home farm. For lists in remote farms, the operation can only be performed on the list itself.

To include both the list itself and all of its child items:

In the Selection section, check the **Include Children** checkbox.

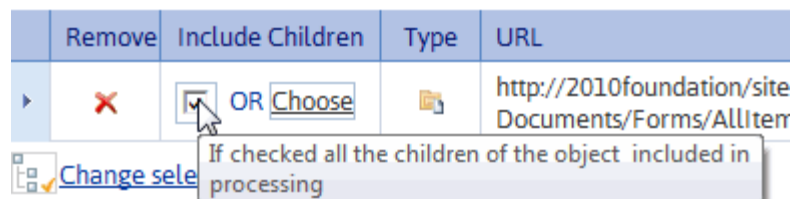


NOTE: The Include Children checkbox will not be visible if the operation requires that you select items explicitly. (Copy/Move List Items is a notable example).


To specify folders and items to include (with or without the list itself):

- 1 Click the **Choose** link to display the List Item picker.


A pop-up window displays all of the items at the top level of the list hierarchy. If you want to display items within folders and subfolders, click the folder in the tree in the left pane. (You can drag the border between the left and right pane to resize, or click the arrow to open/close the left pane).

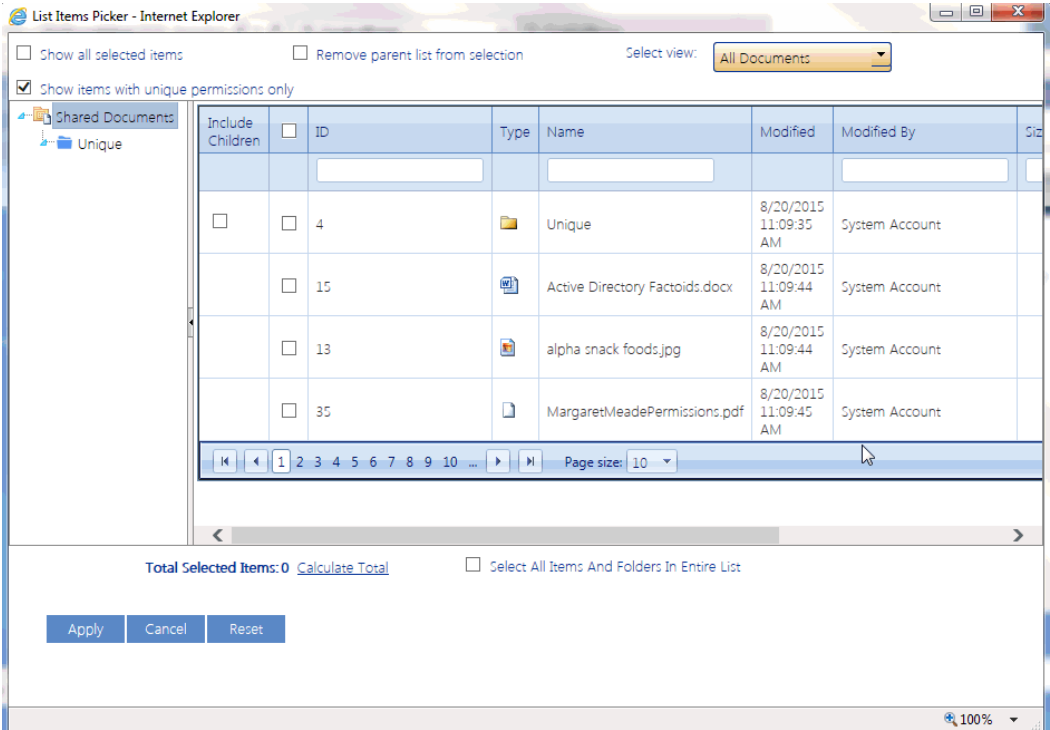

You can sort or filter list items by most of the column headers.

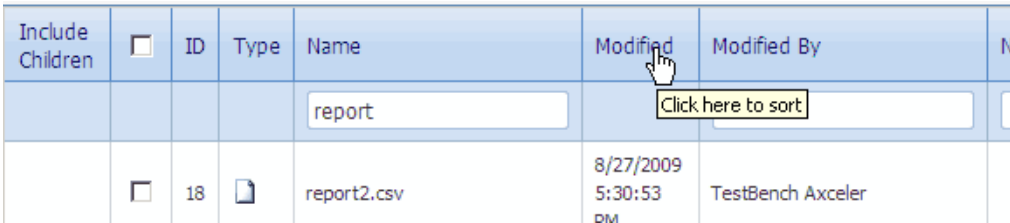

If more than one view has been defined for a list or folder, you can select a different view from the **Select view** drop-down.

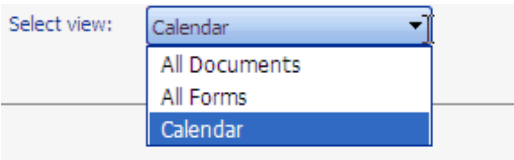

- 2 Use the information in the following table to determine the appropriate action(s) to take.

If you want to include ...	Then ...
items with both inherited and non-inherited permissions	uncheck the Show items with unique permissions only box. NOTE: If you leave this box checked, only items with unique (non-inherited) permissions will display.


If you want to include ...	Then ...
all items and folders	<p>check the box in the header.</p> <p>NOTE: When you check this box and your selection includes folders, only the folder itself will be selected, not its children.</p>
selected items and folders within the root of the list	<p>check each item and folder that you want to include.</p> <p>NOTE: If you check a box immediately to the left of a folder, only the folder itself will be selected, not its children.</p>
all items within a folder	check the Include Children box to the left of the folder.
individual items within a folder	<p>in the left pane:</p> <ul style="list-style-type: none"> • expand the folder, and • select the item(s) you want to include.

NOTE: Normally, as you select items, the **Total Selected Items** value is updated automatically. Exceptions are if you check the box in the header to select all items then deselect items individually or if you select items by highlighting rows instead of explicitly clicking checkboxes. For both of these cases, you will need to click the **Calculate Total** link to update this value.

- 3 If, after you have finished selecting items you want to trim the list to display *only* selected items, check the **Show All Selected Items** box.
- 4 If you want to exclude the list itself (that is, perform the operation only on item(s) *within* the list, check the **Remove Parent List from Selection** box.
- 5 When you have finished, click **[Apply]**.

Adding Objects from the SharePoint Hierarchy to Your Selection

After you have initiated a ControlPoint operation from the SharePoint Hierarchy, you can easily add objects to your selection using the **Add to Selection** menu option.

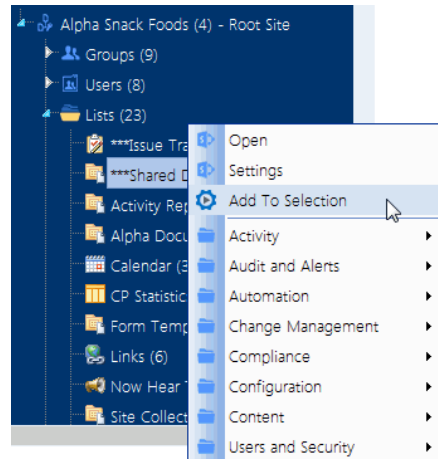

EXCEPTIONS:

You cannot add an object to your selection if the operation:

- has not yet been chosen from the menu
- is already within the scope of your selection (for example, you are attempting to add a site collection within a Web application that has already been selected)
- is not relevant for the object (for example, you initiated a Site Permissions analysis then attempted to add a list to your selection)
- can only be performed on a single object (such as a copy or move action).

NOTE: If you attempt to add an object to an operation that can only be performed on a single object, it will *replace* the object that was originally selected.

Saving and Re-Using a SharePoint Object Selection

If you frequently perform ControlPoint operations on the same set of SharePoint objects, you can save your selection to a local drive or network file share as an XML file. You can then upload the file on an as-needed basis, and eliminate the need to select the same set of objects whenever you perform a ControlPoint operation.

Only objects that are valid for the current operation will be included in the scope. For example:

- If your selection includes list items and you initiate an operation that is not valid for list items, those items will be excluded from scope.

- If you initiate an operation that can only be performed on a single object, the option to upload a selection from XML will not be available.


Generally, a selection saved on one farm cannot be uploaded to a different farm.

EXCEPTION: In a multi-farm environment, if a saved selection include items from more than one farm and you have initiated a ControlPoint operation that can act on multiple farms, it can be uploaded to any farm involved in the operation.


Once you have initiated an operation then upload a selection from XML, you have the option of replacing the current selection with the selection in the XML file or adding to it. It is important to note, however, that if you chose to *add to* the current selection and one group of objects is within the scope of the other (for example, the saved selection includes objects within the scope of the existing selection), the larger scope will be applied.

To save a selection to an XML file:

- 1 Initiate a ControlPoint operation for the selection you want to save.
- 2 In the Selection pane, click the **Save selection** link.

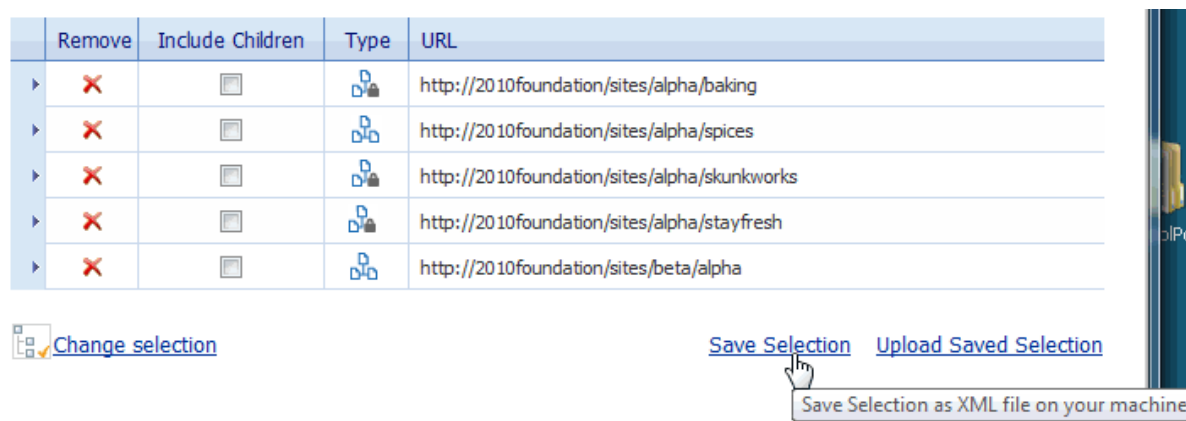

The Download File dialog displays.

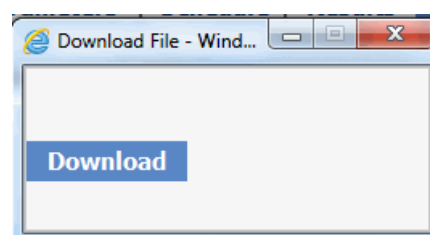


- 3 Click [**Download**] to display the File Download dialog.
- 4 Click [**Save**] then save the file to the local or network location of your choice.

NOTE: It is recommended that you change the default file name, Selection.XML, to a name that is unique and descriptive.

- 5 When the file has finished saving, click [**Close**] to dismiss the open dialogs.


To upload a selection from an XML file:

- 1 Initiate the ControlPoint operation you want to perform.
- 2 In the Selection section, click the **Upload Selection** link.

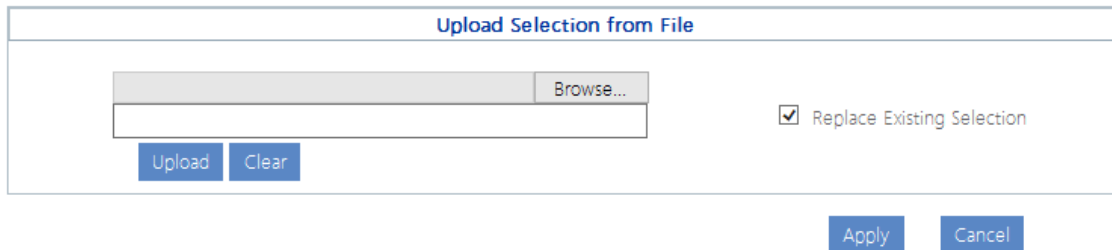

- 3 Click [**Browse**] and navigate to the file you want to upload.
- 4 The path to the file displays in the field to the left of the [**Browse**] button.
- 5 Click [**Upload**] to move the file path to the field below.
- 6 If you want the uploaded selection to **Replace Existing Selection**, check this box.

NOTE: If you leave this box unchecked, the uploaded selection will be *appended* to the current selection.

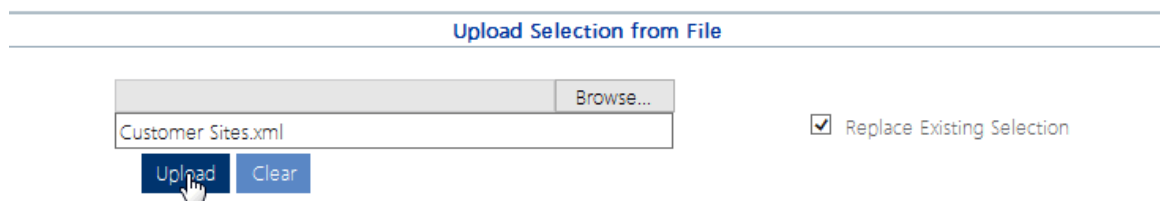


- 7 Click [**Apply**].

Selecting Users on Which to Perform a ControlPoint Action or Analysis

When you initiate a ControlPoint action or analysis that involves SharePoint users, the Parameters section of the workspace includes the standard SharePoint "People Picker" for selecting the user(s) you want to include.



If you initiate an operation by selecting one or more users from the SharePoint Hierarchy, the People Picker will be pre-populated with the selected user(s).

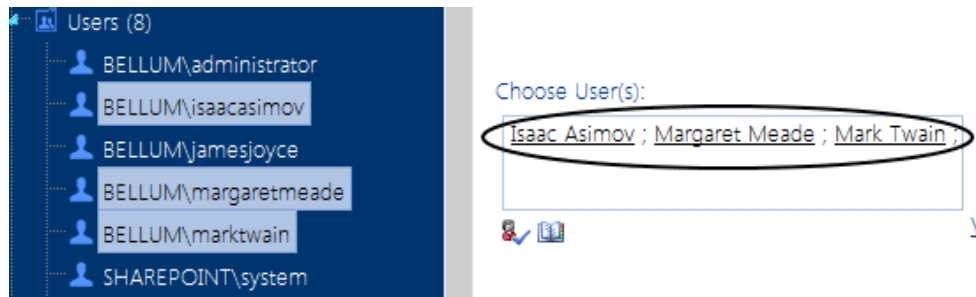

You can:

- perform the operation on all SharePoint users (by leaving the People Picker blank)

OR

- select one or more individual users.

Many ControlPoint operations also give you the option of selecting multiple users based on:

- a wildcard (*)


AND/OR

- a SharePoint user profile.

NOTE: There is a maximum number of users that can be included in a ControlPoint action. This limit is a "safety net" to prevent the operation from being carried out on more users than intended, which is especially useful when a wildcard is used. The ControlPoint Application Administrator can adjust this limit by changing the Value for the ControlPoint Configuration Setting Maximum Number of Users to Act on (MAXUSERSFORACTION), as described in the ControlPoint Administration Guide.

Selecting Individual Users

Enter the name of one or more users on which you want to perform the action or analysis. Separate each user name with a semicolon (;). You can either:

- enter a *full* user account name (for example, *domain\username* or *service provider:username*), then click the Check Names icon () or press **[Ctrl] k** to validate the user name.

OR

- click the Browse icon () and search for the user.

If your environment includes alternate authentication providers (that is, in addition to Active Directory), when you initiate an action or analysis for a single Web application you can validate or browse for individual users managed by any authentication provider supported by that Web application. Similarly, if you use claims-based authentication and want to perform an operation on a claim, you can validate

the claim if it is being performed on or within a single Web application. Because of limitations inherent in SharePoint, however, if you have selected the entire farm or *multiple* Web applications, you can type in alternate authentication-user account names or claims, but you can neither validate nor browse for them.

Depending on the action or analysis you are performing, ControlPoint may or may not allow invalidated users to be included in the operation. For example, you cannot add a user to a site unless the user's existence in the provider database can be validated. However, you can *delete* or *report on* an unvalidated user's permissions from a site, because it is reasonable to assume that a user who has been granted permissions to a SharePoint site may no longer exist in the provider database(s), as in the case of a former employee.

Selecting Users Based on a Wildcard

You can use a wildcard (*) to select users that you want to include in a ControlPoint operation. Only one wildcard can be used per entry and generally can be placed anywhere within the account name. ControlPoint will return all users (including Active Directory groups) whose account name matches the specified pattern. Built-in Active Directory Groups are always excluded.

For most actions and all analyses, users that match the pattern—along with their permissions—are collected from the ControlPoint data cache, which is current as of the date and time of the last run of [ControlPoint Discovery](#). For actions that *add* users (such as Set User Direct Permissions and Add User to SharePoint Group) ControlPoint queries Active Directory for users that match the specified pattern. Therefore, non-Active Directory users cannot be added using a wildcard.

EXAMPLES:

If you want to select ...	Enter ...
all users and groups within thebellum domain	bellum*.
all instances with the user name jamesjoyce, across all Active Directory domains	<div>*\jamesjoyce. <div>NOTE: This option cannot be used for actions that <i>add</i> users and require a query against Active Directory rather than the ControlPoint data cache. For these actions, the full domain name must be used.</div><div>If you want to use a wildcard to select users in different Active Directory domains, a two-way trust relationship must exist.</div></div>
all users with the last name Smith within the bellum domain	bellum*smith.

NOTE: Currently, wildcards cannot be used within the name of a claim.

Selecting Users Based on a SharePoint User Profile

If you are running MOSS or SharePoint Server, you can select users for most ControlPoint operations based on a common property defined in the SharePoint User Profile service(s) associated with the Web application.

NOTE: To use this feature, the User Profile Service Application must be enabled and associated with each of the Web applications within the scope of the action or analysis. If more than one instance of this service application is associated with a Web application, the default instance will be used.

Requirements

In order to act on or analyze users based on a SharePoint User Profile property:

- the ControlPoint Service account must have permissions to access the User Profile Service application, and
- the User Profile Service application must be associated with the Web application(s) within the scope of the operation.


If the above requirements are not met for a particular Web application:

- In the case of an **action**:
 - profile-based users with permissions for sites within that Web application will not be acted upon, and
 - the name of each Web application that was not included in the action will be recorded in the ControlPoint Task Audit.
- in the case of an **analysis**:
 - the analysis will not continue processing, and
 - the following message will display in the analysis header: *"No User Profile Application available to service the request. Contact your farm administrator."*

To select users based on a SharePoint User Profile property:

- 1 Click the profile icon () to display the Profile Property Selection dialog.

- 2 Select a **Property Name** from the drop-down.

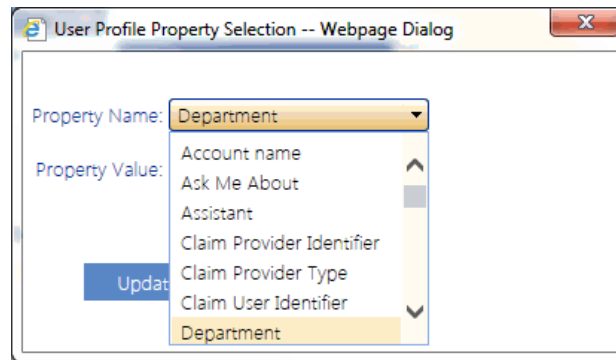

NOTE: The Property Name drop-down includes properties whose Data Type is string, person, or boolean. If your selection has more than one associated User Profile service, the dialog will include properties from all associated profiles on the home farm.

- 3 Select or enter a **Property Value**.

NOTE: Depending on the nature of the property, the Property Value drop-down may or may not be populated. For properties of the Data Type person, enter a full account name (for example, domain\user_name). For properties of the Data Type boolean (identified in the SharePoint user profile by a check box), enter *true* (for checked) or *false* (for unchecked).

- 4 Click **[Upload]**

Using a Combination of User Selection Options

For most ControlPoint operations, you can specify a combination of individual users, wildcards, and/or profile properties. When a combination of selection options is used, *all* users specified through *any* of these criteria will be included in the operation.

Operations that Include Two People Pickers

When a ControlPoint action includes both a source and a target People Picker, such as Duplicate User Permissions and Delete User Permissions (when permissions are reassigned), additional rules and restrictions for user selection apply. Refer to the operation-specific topic in this guide for details.

Using Discovery to Collect Information for the ControlPoint Database Cache


ControlPoint Discovery is a farm-specific background task that collects information and stores it in the ControlPoint Services (xcAdmin) database cache for the following purposes:

- for use in ControlPoint data analysis and reporting
- to populate SharePoint permissions for members of the ControlPoint Business Administrators group
- to identify ControlPoint users who meet the criteria for "Admins" for [scheduled analysis distribution](#), and
- to populate and update statistics lists used to create dashboards.

Discovery is triggered by the ControlPoint Discovery Service to run on a pre-defined schedule. In addition to collecting data for analysis and reporting, Discovery records the SharePoint permissions of site administrators (that is, members of the ControlPoint Business Administrators group). See [Making ControlPoint Available to Business Users \(Site Administrators\)](#)

If you want to ensure that your ControlPoint analyses have the most recent cached data—you can [run the Discovery process interactively from the ControlPoint application](#). The ControlPoint installer includes the option to configure the Discovery Service.

If the ControlPoint Discovery Service is not installed, the operations and parameters that rely on cached data collected by Discovery are disabled.

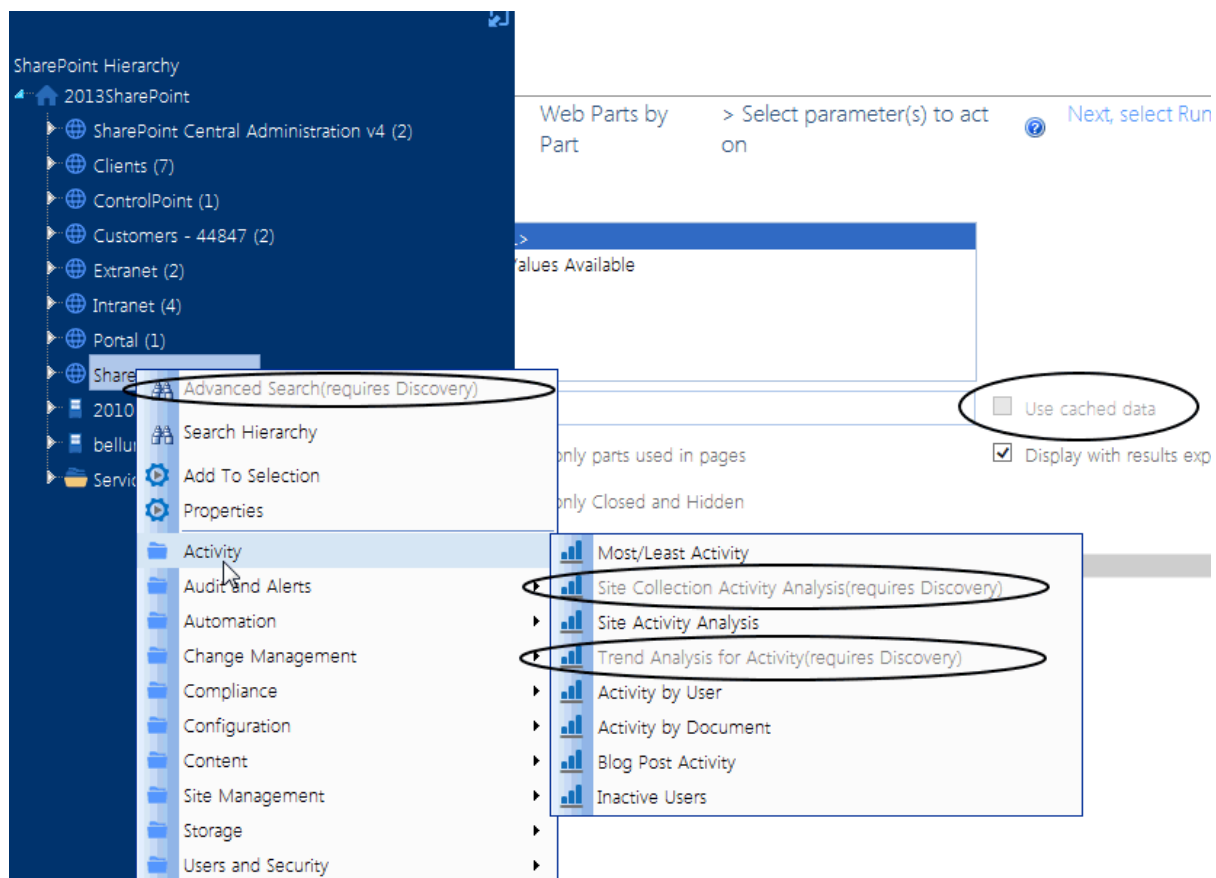


Running ControlPoint Discovery Interactively from the ControlPoint Application

ControlPoint Application Administrators can run the Discovery Service interactively from the ControlPoint application interface between scheduled Discovery runs.

NOTE: For Discovery to be run interactively, the Discovery Service must be installed, configured, and running. Refer to the *ControlPoint Administration Guide* for details.

To run a ControlPoint Discovery interactively:

- 1 From the Manage ControlPoint panel choose **ControlPoint Management > Discovery**.
NOTE: If you are not a ControlPoint Application Administrator, this option will be hidden.

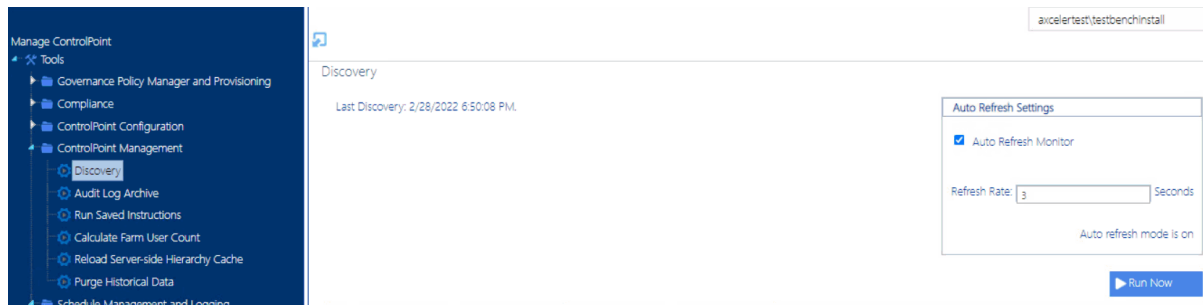

2 Click [Run Now].

The results show each table in the ControlPoint Services (xcadmin) database that the Discovery Service collects data from. The **Auto Refresh Setting** can be enabled to refresh after a specified number of seconds..

NOTE: The **Queue Date** is the date and time of the next *scheduled* Discovery.

Auto Refresh Settings					
<input checked="" type="checkbox"/> Auto Refresh Monitor					
Refresh Rate: <input type="text" value="3"/> Seconds					
Auto refresh mode is on					
Run Now					

	Queue Date	Task	Last Start Date	Last End Date	Last Message
✓	3/8/2022 1:00:00 AM	xcTopHierarchy	3/7/2022 7:36:35 PM	3/7/2022 7:37:03 PM	Task Finished
✓	3/8/2022 1:00:00 AM	xcUserRights	3/7/2022 7:37:03 PM	3/7/2022 7:37:03 PM	Task Finished
✓	3/8/2022 1:00:00 AM	xcUsers	3/7/2022 7:37:03 PM	3/7/2022 7:37:04 PM	Task Finished
✓	3/8/2022 1:00:00 AM	xcWapRights	3/7/2022 7:37:04 PM	3/7/2022 7:37:04 PM	Task Finished
✓	3/8/2022 1:00:00 AM	xcSiteInfo	3/7/2022 7:37:04 PM	3/7/2022 7:37:11 PM	Task Finished
✓	3/8/2022 1:00:00 AM	xcBAUsers	3/7/2022 7:37:11 PM	3/7/2022 7:37:11 PM	Task Finished
✓	3/8/2022 1:00:00 AM	xcStats	3/7/2022 7:37:11 PM	3/7/2022 7:37:18 PM	Task Finished

Searching for SharePoint Sites

The ControlPoint search functionality is designed to complement that used by SharePoint.

The SharePoint search focuses on content (documents, users, and so on) based on metadata and/or words within the content. The ControlPoint search focuses on finding SharePoint sites based on their properties.

ControlPoint lets you:

- locate SharePoint sites by **entering simple search terms** or using an **Advanced Search**, and
- find a SharePoint site within the context of the ControlPoint SharePoint Hierarchy using the **Search Hierarchy** function.

A search can also be used to locate objects in the [Change Selection pane](#) and the various object pickers used throughout ControlPoint.

TIP: For locating sites within a very large farm, consider using the ControlPoint search functionality as a time-saving alternative to browsing through the SharePoint Hierarchy.

Performing a Simple or Advanced Search


To locate sites within your SharePoint environment, you can perform either:


- a simple search (by entering a full or partial site name or url), or
- an advanced search (by selecting from a variety of criteria on which to base your search).

NOTE: Simple and advanced searches use cached data collected by the [ControlPoint Discovery job](#). This means that it will take less time to process than a hierarchy search, which by default uses real-time data.

To perform a simple search:

- 1 From the left navigation frame choose **Search**.
- 2 Enter a full or partial site name in the **Simple Search Terms** box.

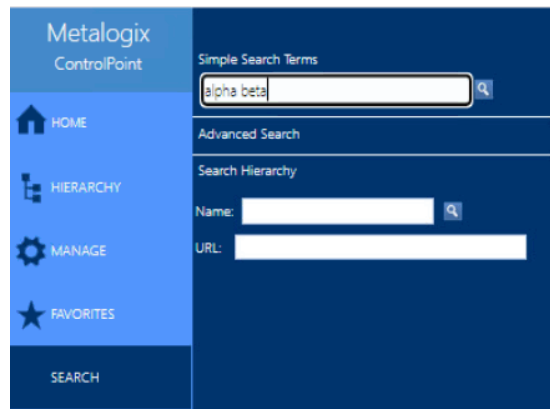


- 3 Click the magnifying glass icon ().

NOTE: Results will include sites that match *any* part of the text string that you entered.

Advanced Search 

Expand/Collapse Select All Download Report Data as CSV Interactive An

1 of 1 | Export to the selected format | Export 


Metalogix Search Results bellum\administrator
9/23/2015 10:20:46 AM

Search Criteria: alpha beta
Cached: 4/30/2014 2:08:14 PM

Total: 4

Select	Title	URL	Site Collection	Web App.
Select	<input type="checkbox"/> Alpha Snack Foods - Write-Locked	http://2010foundation:44847/sites/alpha	Alpha Snack Foods - Write-Locked	Customers - 44847
Select	<input type="checkbox"/> Alpha Snack Foods	http://2010foundation/sites/alpha	Alpha Snack Foods	SharePoint - 80
Select	<input type="checkbox"/> Beta Aquatics	http://2010foundation/sites/beta	Beta Aquatics	SharePoint - 80
Select	<input type="checkbox"/> Alpha Snackfoods	http://clients/sites/alpha	Alpha Snackfoods	Clients


Selection:

Include Children	Type	Name	URL	Path
<input checked="" type="checkbox"/>		2013SharePoint	http://2010foundation:1818	2013SharePoint


To perform an advanced search:

- 1 Use one of the following options:

- From the SharePoint Hierarchy or Search Hierarchy results, select the object(s) on which you want to perform your search. Right-click and choose **Advanced Search**.

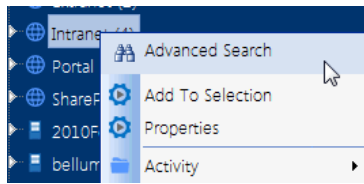


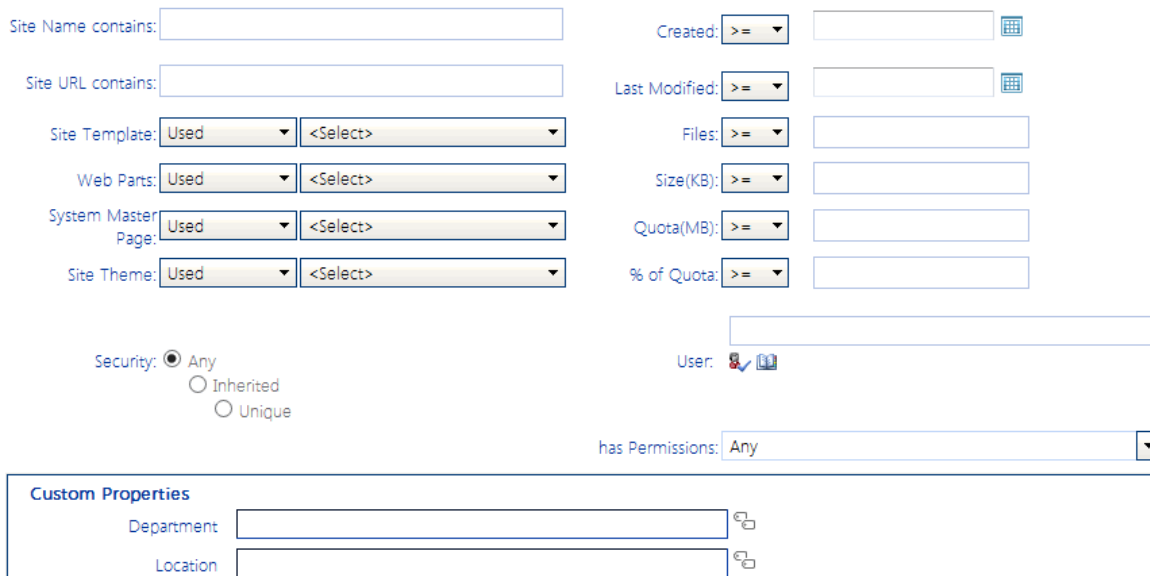
- From the left navigation frame Search tab, choose **Advanced Search**.

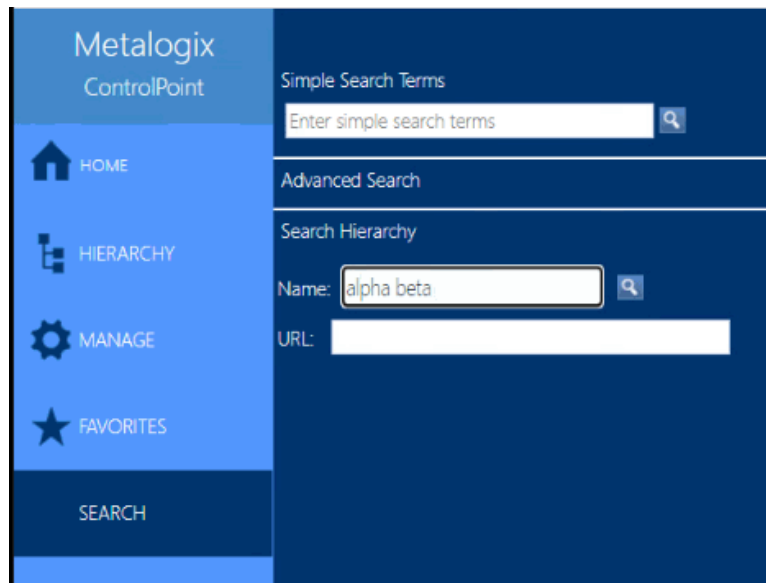

NOTE: When you initiate your search from anywhere within the SharePoint Hierarchy, the scope of the search will be limited to sites within that level of the hierarchy. When you initiate the search from the Search tab, the search will include all matching sites within the farm. The Central Administration site, however, is always *excluded* from search results.

2 In the Parameters section, select/enter the criteria you want to use to narrow your search.

Advanced Search > Select parameter(s) to act on 



Site Name contains:

Site URL contains:

Site Template:

Web Parts:

System Master Page:

Site Theme:

Created:

Last Modified:

Files:

Size(KB):

Quota(MB):

% of Quota:

Security: ☒ Any
☐ Inherited
☐ Unique

User:

has Permissions:

Custom Properties

Department

Location

You can:

- enter a full or partial **Site Name** and/or **Site URL**

NOTE: If you enter a **Site URL**, only the URLs of sites within the SharePoint farm for which you have management permissions will be included in the search. Links from a page in the farm to other sites in the farm or content outside the farm will *not* be searched. In addition, unlike the simple search, if you enter more than one word in the name field, the full string *as you typed it* must occur within a site name for it to display in the results.
- select one or more site attributes:
 - **Site Template Used or Not Used**
 - **Web Parts Used or Not Used**
 - **System Master Page Used or Not Used**, and/or
 - **Site Theme Used or Not Used.**

NOTE: Because the search uses cached data, the drop-down lists for the above attributes are populated with items that are current as of the last time [ControlPoint Discovery was run](#) and contain values that have actually been used within the selected scope.
- specify one or more site parameters, by selecting the appropriate operator (>=, <=, or =) and entering a value for:
 - number of Files
 - Size (KB)
 - Quota
 - % of Quota

Working with Simple or Advanced Search Results

All simple and advanced search results pages include a standard header and footer, in addition to search results detail.

Search Results Toolbar

ControlPoint search results pages employ a report toolbar that contains page navigation, zoom, find, export, and print capabilities.



Search Results Header

The search results header sections contains summary information, including the search criteria used, as well as the scope of the search (as determined by the level at which the search was initiated).

The Cached field displays the date and time that the cache was last refreshed via ControlPoint Discovery. The search results are current as of that date and time.

Metalogix

Search Results

Search Criteria: TEMPLATE#|#S#|#@likeSTS#0 PERM#|#ADMINISTRATOR
Cached: 10/12/2013 3:52:48 AM

Search Results Footer Information

The search footer contains the following information:

- the name of the administrator who generated the search (which can be useful if search results are exported or printed and distributed, since the content of the search reflects that administrator's permissions)
- the number of pages in the search (you can scroll through multi-page search results from the results toolbar in the search results header), and
- the date and time when the search results were generated.

Selection:





Include Children	Type	Name	URL	Path
✓	Alpha	Alpha Snack Foods (4)	http://2010foundation/sites/alpha	2010SharePoint > SharePoint - 80 > Alpha Snack Foods
✓	Beta	Beta Aquatics (25)	http://2010foundation/sites/beta	2010SharePoint > SharePoint - 80 > Beta Aquatics
✓	Delta	Delta Transportation	http://2010foundation/sites/delta	2010SharePoint > SharePoint - 80 > Delta Transportation

Page 5 of 5

2/27/2014 3:53:26 PM

Acting on Search Results

From search results you can perform any of the actions described in the following table.

If you want to ...	Then ...
print search results	<p>from the results toolbar:</p> <p>a) Click the Print Preview icon ().</p> <p>b) Click the print icon ().</p> <p>(Printed results will contain only the data that is currently expanded.)</p>
export search results	<p>choose an Export to the selected format option from the drop-down, then click the Export link.</p> <div data-bbox="758 862 1157 963">  </div> <p>NOTE: If you export to Excel, all data will be exported, regardless of whether it is expanded. If you export to an Acrobat (PDF) file, only data that is currently expanded will be exported.</p>
download raw analysis result data to a CSV file that can be imported into another program for further examination	<p>click the Download Report Data as CSV hyperlink in the results toolbar.</p> <div data-bbox="726 1187 1189 1265">  </div> <p>This option differs from the csv option in the Export... drop-down in that it provides all of the raw data (including object GUIDs and internal field names, for example) used to create the results. This may be useful for troubleshooting or for more in-depth analysis.</p>
perform a ControlPoint action or analysis within the current workspace	use the procedure for Acting on Search or Data Analysis Results .

Searching within the SharePoint Hierarchy

Use the Search Hierarchy feature to locate sites within the ControlPoint SharePoint Hierarchy.


This feature is a useful alternative to the SharePoint Hierarchy for navigating through a large farm. In a multi-farm environment, you can only search the home farm.

NOTE: By default, the Search Hierarchy feature uses real-time data. However, to enable faster searches in large environments, ControlPoint Application Administrators can change the default value

of the ControlPoint Configuration Setting. If cache data is used, however, results will not return results for which your only permissions are Full Control in the Web Application Policy.

To perform a hierarchy search:


- 1 From the left navigation panel, choose **Search**.
- 2 Under **Search Hierarchy**, enter a full or partial **Name** and/or **URL**.

A screenshot of the 'Search Hierarchy' dialog box. It has a dark blue header with the title 'Search Hierarchy'. Below the header, there are two input fields. The first is labeled 'Name:' and contains the text 'Control', with a magnifying glass icon to its right. The second is labeled 'URL:' and is currently empty.

- 3 Click the magnifying glass icon ().

All of the sites and subsites that meet *all* of your search criteria display—along with associated lists, users and groups—within the appropriate hierarchical context,

You can navigate through search results and access SharePoint pages and ControlPoint actions and analyses via the right-click menu.

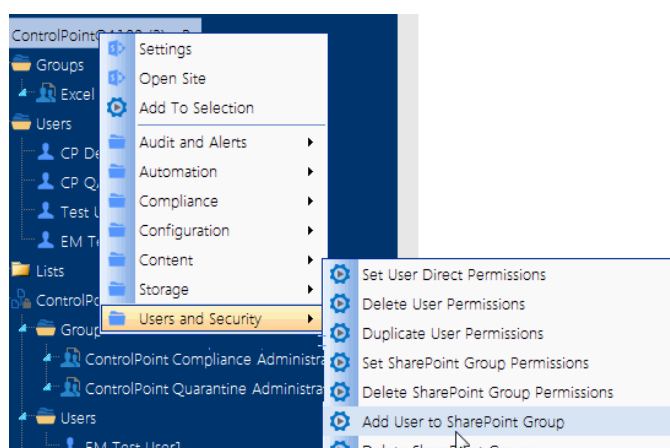

Managing SharePoint Objects

From the SharePoint Hierarchy panel, you can access a variety of SharePoint administration pages and ControlPoint value-added actions for managing SharePoint objects.

Accessing SharePoint Pages

From the SharePoint Hierarchy panel, you can

- access the relevant SharePoint administration page for managing a SharePoint object, and
- open a SharePoint site or list.

EXCEPTION: By default, all Central Administration and site collection-level administration pages are absent from Business Administrators' menus.


One of the advantages of using ControlPoint over SharePoint to access these pages is that you can link *directly* to the appropriate page, within the relevant context, and without having to enter a url. In a multi-farm environment, you can access SharePoint pages for either the home farm or a remote farm.

Consult your SharePoint documentation for information on using SharePoint administration features to manage SharePoint objects.


Accessing SharePoint Web Application Administrative Pages

A variety of SharePoint Central Administration pages can be accessed from a Web application's right-click menu for:


- Web application configuration

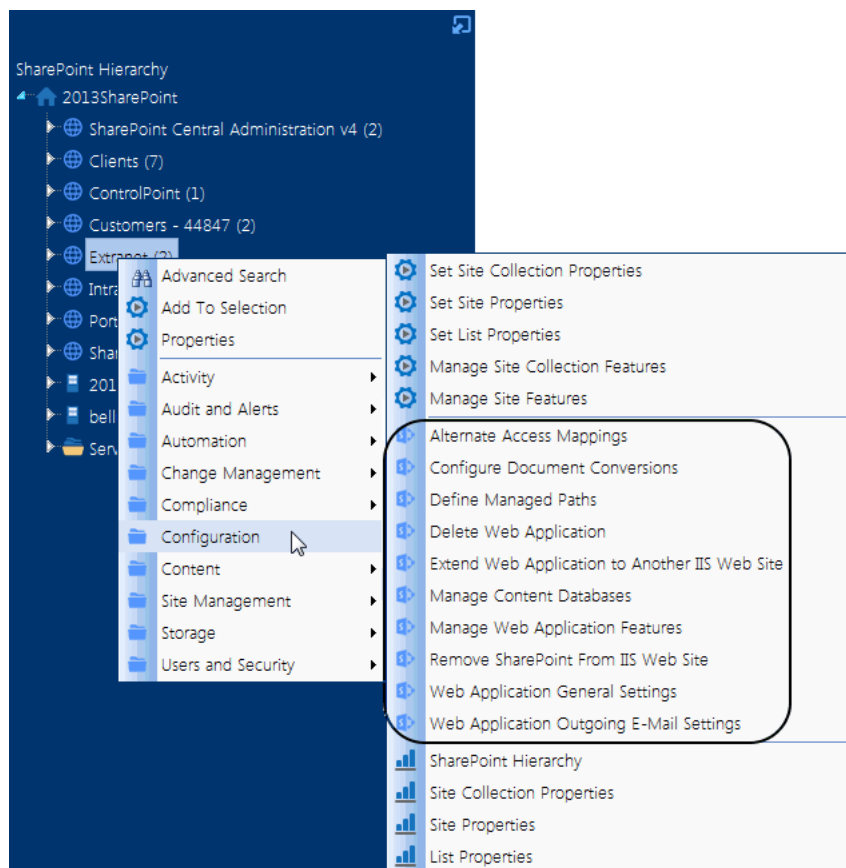

- site management

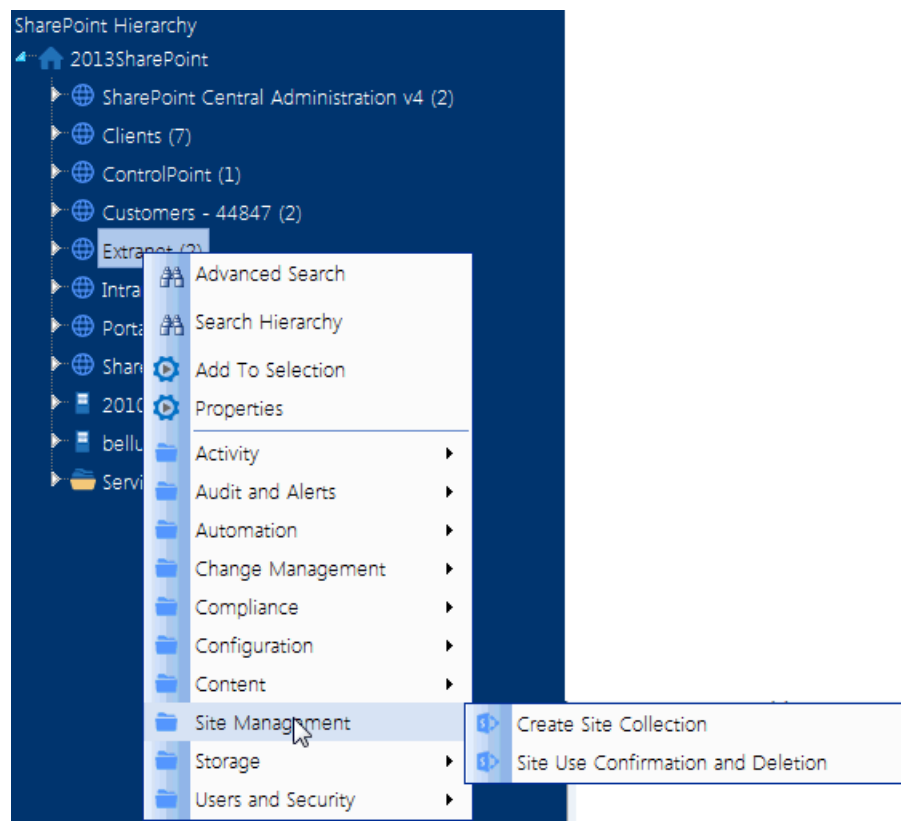


- managing Web application security policies and permissions.

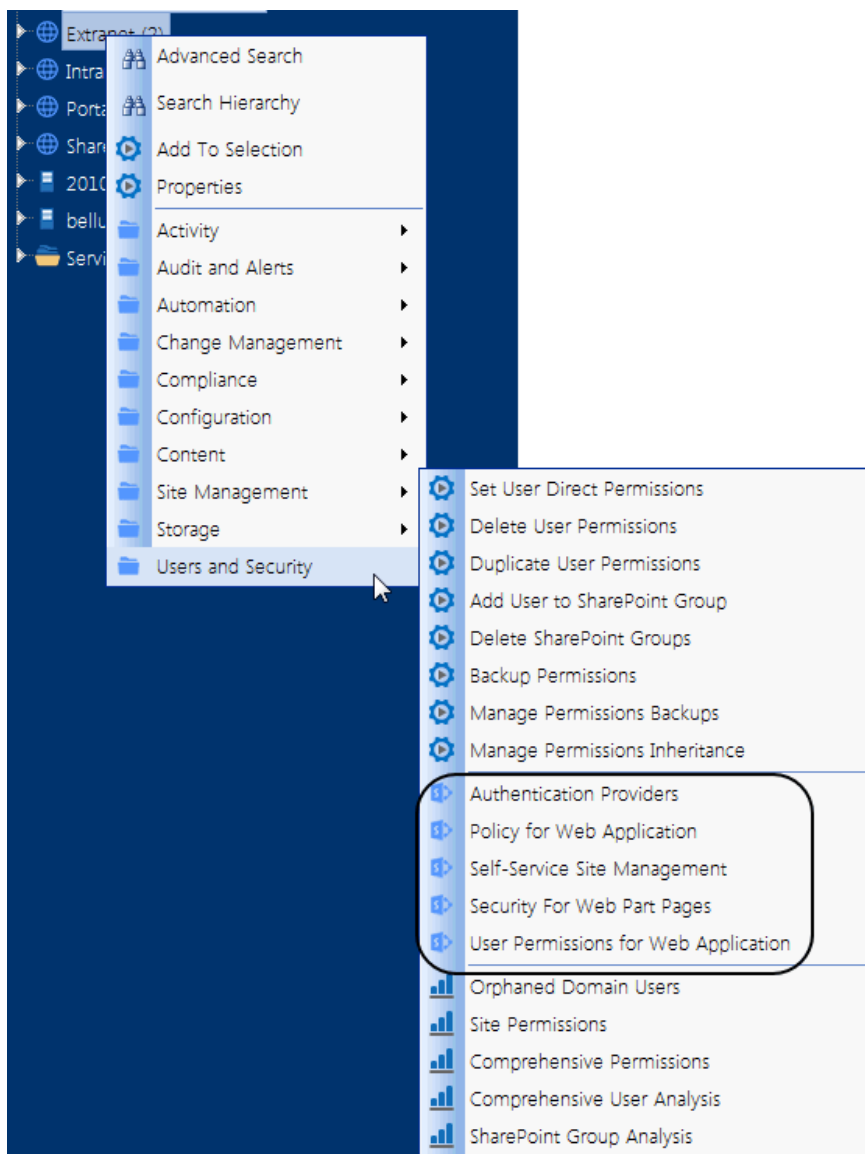


Accessing SharePoint Site Collection Administration Pages

From a site collection's right click menu, you can access a variety of SharePoint pages for managing the site collection, including


- Site **Settings** (for the root site)

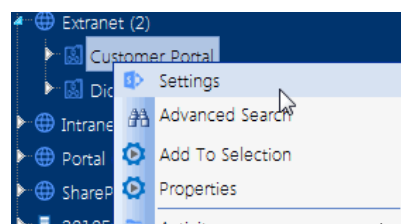

- **Configuration** pages for operations that include setting site properties such as quotas and administrators

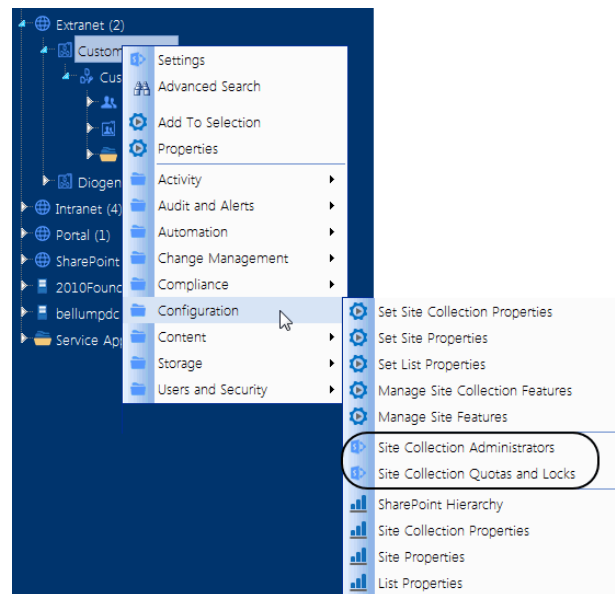


- Pages for managing a site collection's **Content**, including Content and Structure and site creation and site collection deletion.

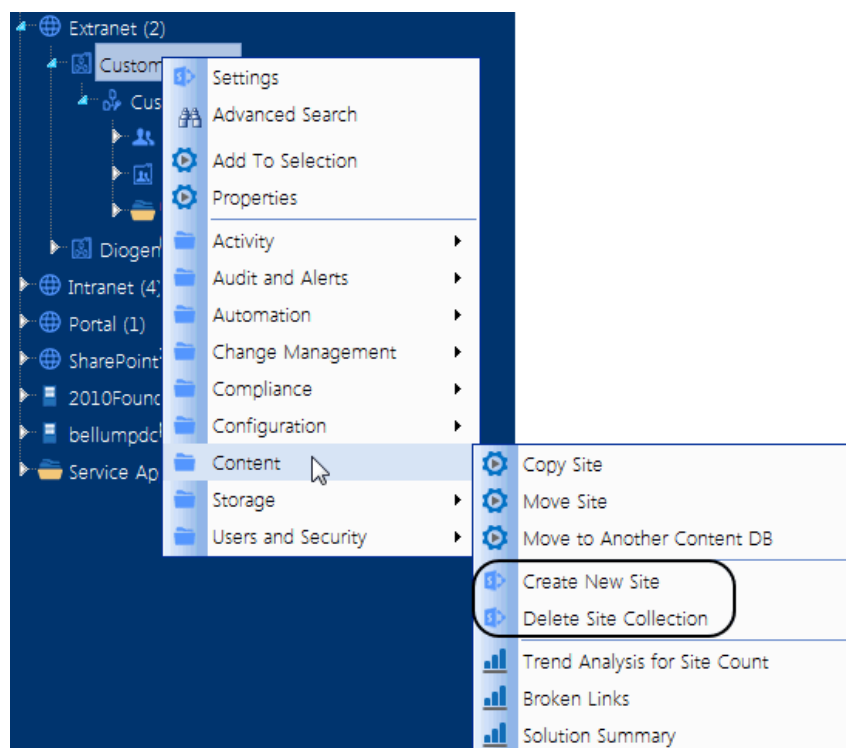


Accessing SharePoint Site Administration Pages

From a site's right click menu, you can access a variety of SharePoint pages for managing the site, including:


- **Site Settings**

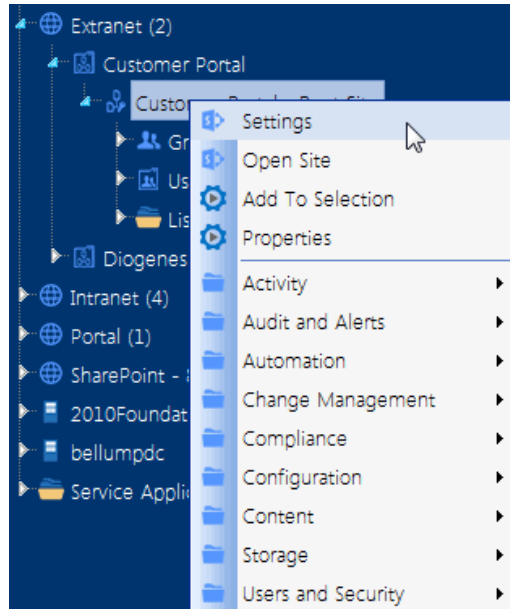

- options for managing site **Content**, including creating and deleting subsites

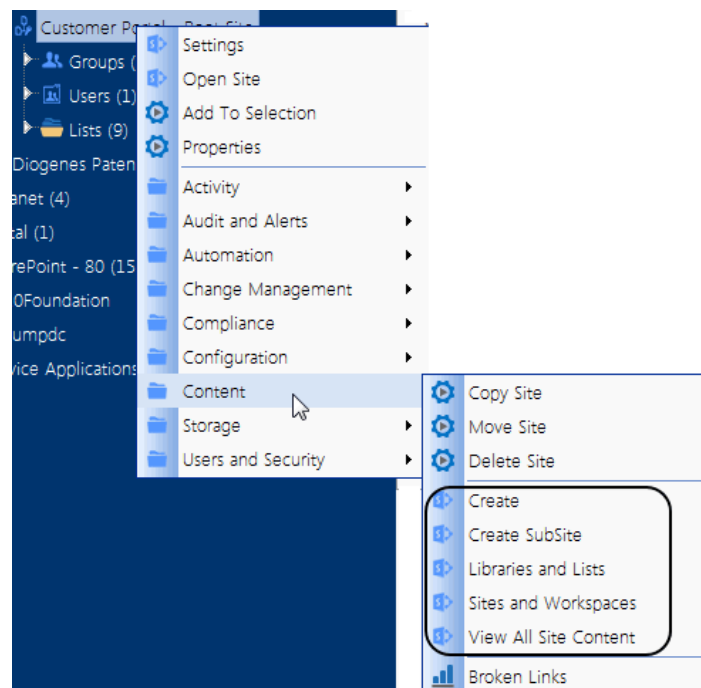

- options for managing Users and Security, including users, groups, and permissions for the site.

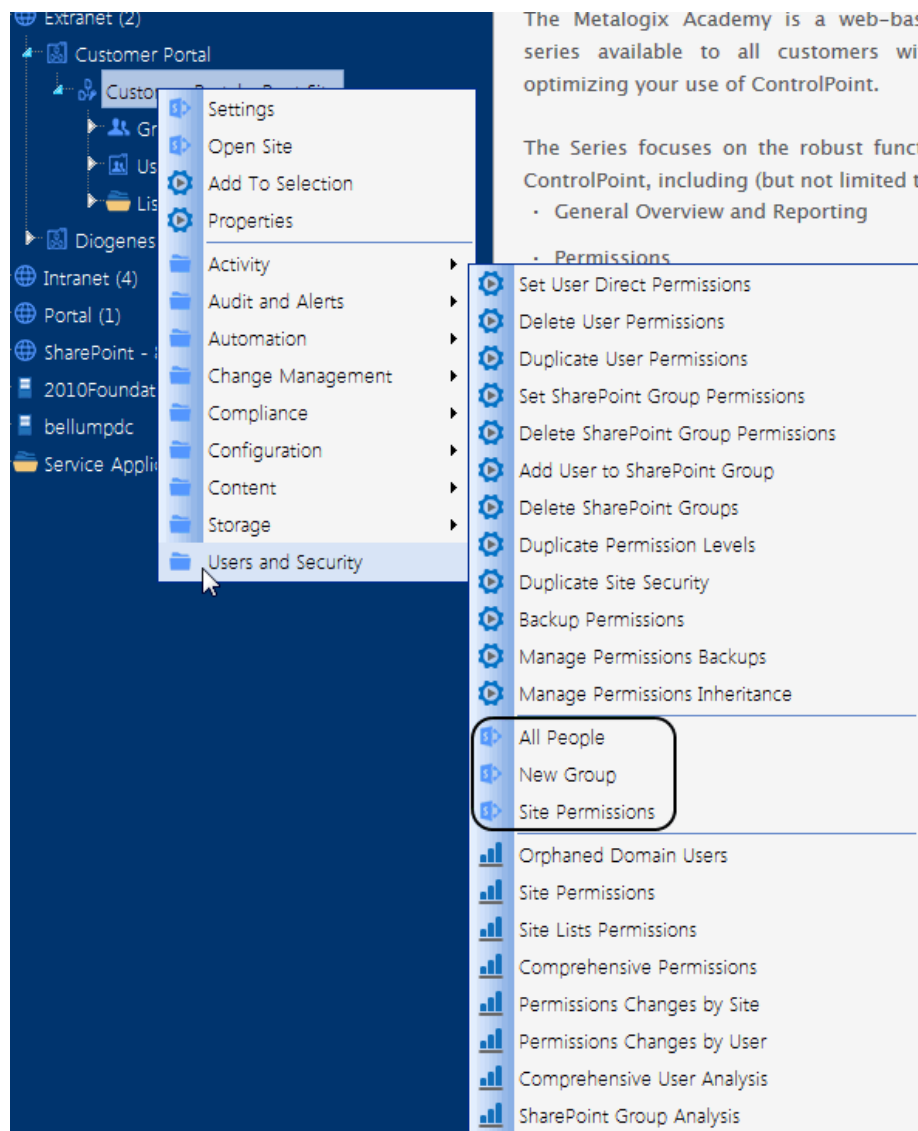


Opening a SharePoint Site in ControlPoint

From the SharePoint Hierarchy panel, you can open a SharePoint site or list in the ControlPoint workspace pane.


To open a SharePoint site in ControlPoint:

From the site's right-click menu, choose **Open Site**.

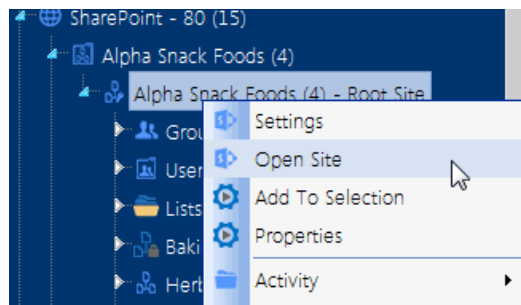


Accessing SharePoint Pages for Managing Libraries and Lists

The Lists folder contains all of the libraries and lists currently used in a site.

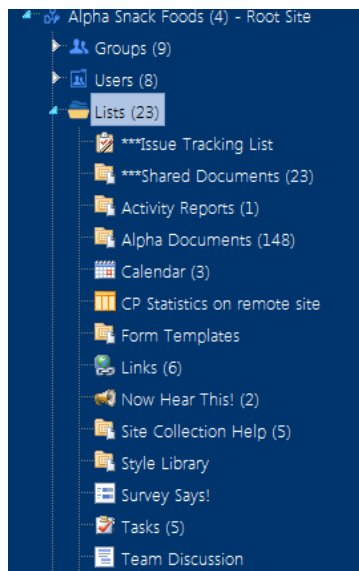

NOTE: Three asterisks (***) to the left of a list name indicates that the list has unique (non-inherited) permissions.

You can link directly to the SharePoint pages for managing the settings of an existing list or open a list.

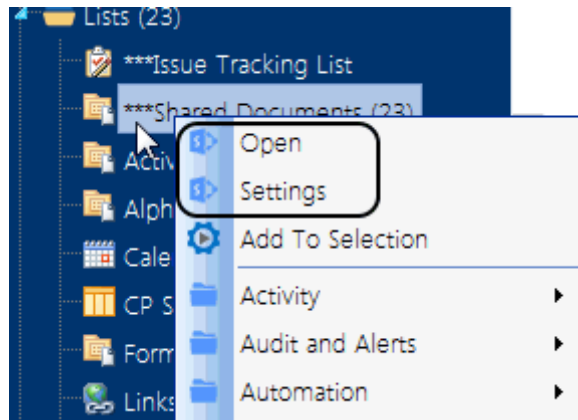

NOTE: If the Lists folder does not display for a selected site, libraries or lists have not yet been created.

Viewing Properties of an Object within the SharePoint Hierarchy

From the SharePoint Hierarchy, you can access an at-a-glance summary of key properties for the farm, a Web application, a site collection, or a site.

You can also retrieve the following statistics for an object at any level of the hierarchy:

- the total number of unique users who have permissions, and
- the total number of users with activity over the past 30 days.

To view an object's properties:

- 1 From the SharePoint Hierarchy, select the object whose properties you want to view.

NOTE: You can only view properties for a single object at a time (that is, the multiple selection is unavailable).

- 2 Right-click and select **Properties**.

Farm Properties

Farm-level properties are maintained in Operations section of the SharePoint Central Administration site.

The screenshot shows the 'Properties' page in Internet Explorer for a SharePoint FARM. The page title is 'Properties - Internet Explorer'. The main content area displays the following information:

- Type: FARM
- Name: SharePoint_Config
- URL: <http://2010foundation:1919/>

Below this information, there are two summary fields: 'Total Users with Permissions:' and 'Total Active Users (last 30 days):'. To the right of these fields is a blue button labeled 'Calculate Totals'.


The main part of the page is a table with two columns: 'Property Name' and 'Property Value'. The table lists various farm-level properties and their current values.

Property Name	Property Value
Can Backup Restore As Configuration	True
Can Migrate?	False
Can Rename On Restore?	False
Can Select For Backup?	True
Can Select For Restore?	True
Can Upgrade?	True
CEIP Enabled	False
Days Before Password Expiration To Send Email	10
Disk Size Required	0
Display Name	SharePoint_Config
Download Error Reporting Updates	False
Error Reporting Automatic Upload	False

The bottom of the browser window shows a zoom level of 100%.


Web Application Properties

Web application-level properties are maintained in the Application Management section of the SharePoint Central Administration pages.

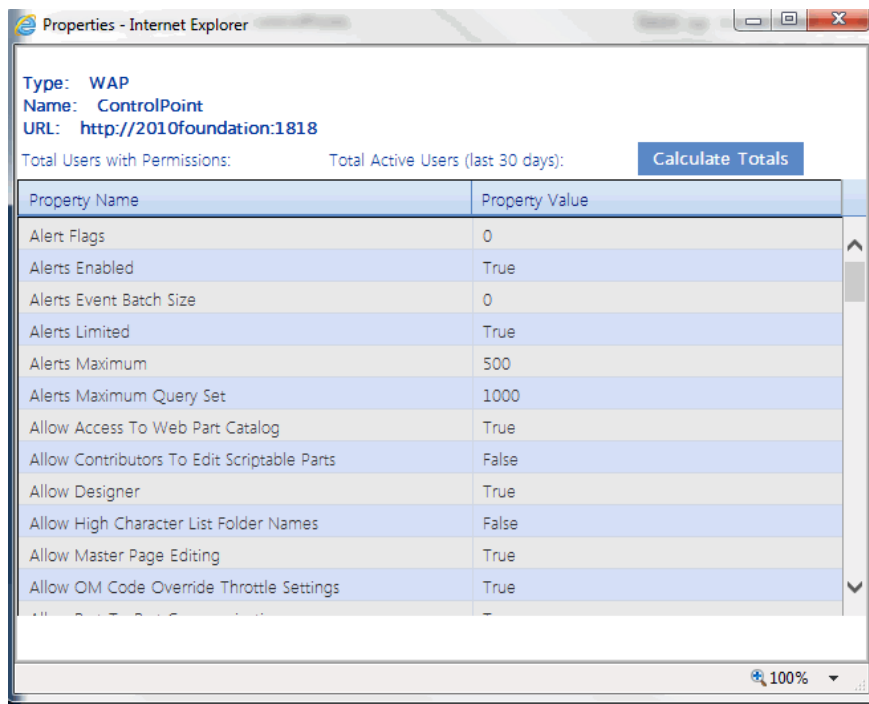


Site Collection Properties

Site Collection properties are maintained in the SharePoint Site Collection Administration area.

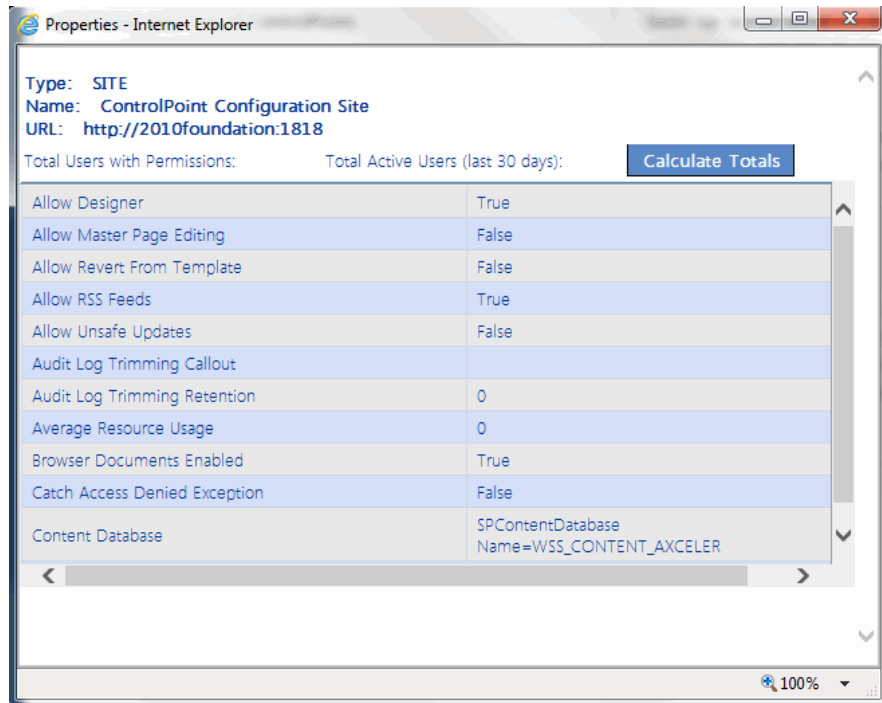

Site Properties

Site-level properties are maintained in SharePoint Site Settings pages.

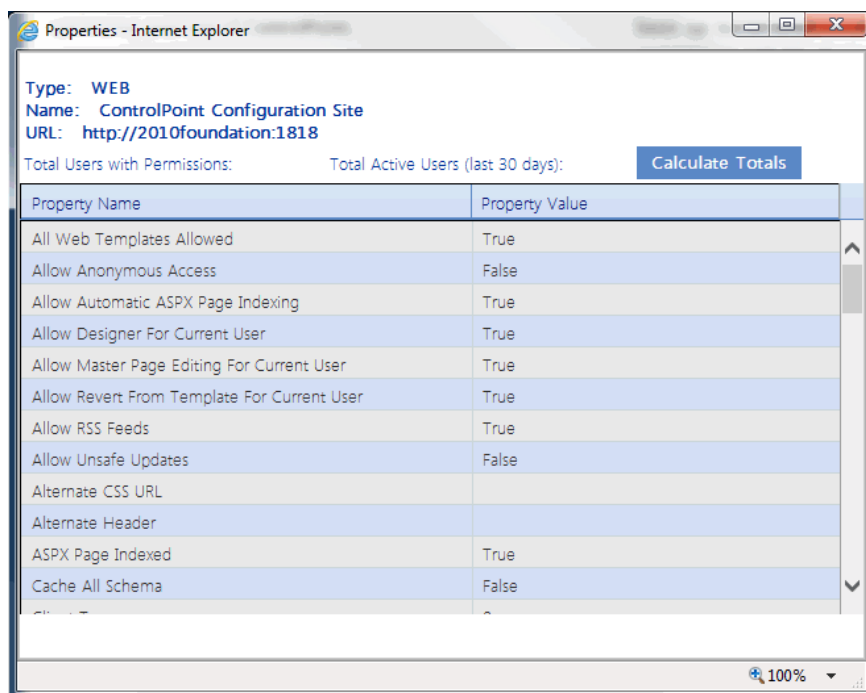


To view user permissions and activity totals (for the selected level of the SharePoint Hierarchy):

Click [Calculate Totals].

When the values have been calculated, the following information displays at the top of the Properties dialog:

- **Total Users with Permissions**
- **Total Active Users** (last 30 days)

NOTE: These totals reflect *unique* users. (That is, any user who has more than one set of permissions to a site is only counted once).

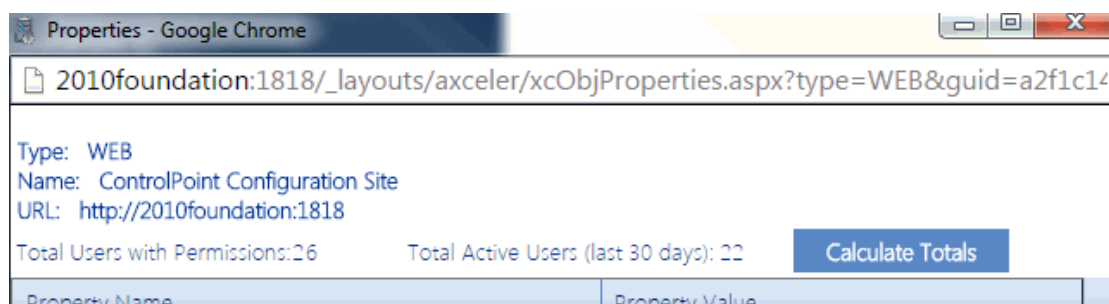

- **Total Users with Permissions** includes:
 - Web application Service Accounts
 - Users granted permissions through Web application policies
 - Site Collection Administrators
 - Users within Active Directory groups to which the ControlPoint Service Account has access (that is, within the same domain or forest or in a different domain/forest for which with a two-way trust exists). Disabled Active Directory accounts are included in this total. If an Active Directory user has been renamed but still has permissions in SharePoint under the old name, each name will be counted as a separate user.
- Excluded from this total are built-in groups and special accounts, such as nt authority\authenticated users (or any account that begins with "nt authority") and sharepoint\system, and users granted permissions via augmented Claims or alternate authentication providers.


NOTE: Total Users with Permissions uses data recorded in the ControlPoint Service Database (xcAdmin), and is current as of the last ControlPoint Discovery run. (The actual number of users *within Active Directory groups* is counted in real-time, however.)

Total Active Users uses 30 days worth of activity data that is collected by the SharePoint usage job(s), and is as current as the last time the job(s) ran.

Creating Dashboards for Monitoring Statistics within Your SharePoint Farm

The ControlPoint Configuration site contains the following custom lists that ControlPoint Application Administrators can use to create "dashboards" of Web Parts for monitoring statistics within a SharePoint farm:

- **Farm Statistics** - Individual farm-wide metrics that are typically presented individually.

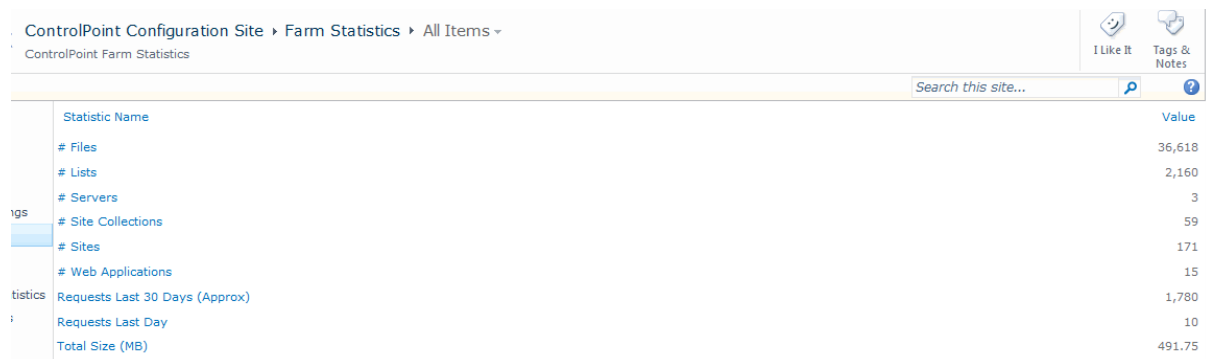

ControlPoint Configuration Site > Farm Statistics > All Items		I Like It	Tags & Notes
ControlPoint Farm Statistics		Search this site...	?
Statistic Name	Value		
# Files	36,618		
# Lists	2,160		
# Servers	3		
# Site Collections	59		
# Sites	171		
# Web Applications	15		
Requests Last 30 Days (Approx)	1,780		
Requests Last Day	10		
Total Size (MB)	491.75		

- **Web Application Statistics** - Rows of data about each Web application. Depending on your needs, you can present aggregate data (column sums, maximums, standard deviation, and so on).

</

- **Site Collection Statistics** - Rows of data about each site collection which, like Web Application Statistics, can be customized to present aggregate data as well as key performance indicators (KPIs).



Site Collection Statistics								
Site Collection Name	URL	# Sites	# Lists	# Files	Total Size (MB)	Requests Last Day	# Users Last Day	
Alpha Snack Foods	http://2010foundation/sites/alpha	8	80	1,350	297.27	3	0	
Baking Technology	http://2010foundation/sites/BakingSite	1	21	613	208.23	1	0	
Beta Aquatics	http://2010foundation/sites/beta	1	20	243	5.19	0	0	
Client List	http://2010foundation	3	26	274	10.02	0	0	

NOTE: by default, the Site Collections Statistics list includes all site collections in the farm. ControlPoint Application Administrators can, however, eliminate from the list groups of site collections that they do *not* want to monitor by excluding the Web applications that host them as

described in the *ControlPoint Administration Guide*. This may be useful, for example, if the number of site collections in your farm exceeds the SharePoint recommended maximum number of list items.

How Statistics Lists are Populated

Statistics lists are populated as part of the ControlPoint Discovery job. When this job runs, the lists are cleared and re-populated with current data.


NOTE: Because of the way in which they are populated, if any of these lists are copied or moved, statistics data will become static (that is, it will not be updated) in the new location.

To create a statistics dashboard on the ControlPoint Configuration root site main page:

NOTE: The steps below are intended to provide introductory guidelines for creating dashboards on the ControlPoint Configuration root site main page. Consult your SharePoint documentation and other available resources for more detailed instructions and/or guidance in using alternate tools and techniques.

- 1 From the ControlPoint Configuration site main page, choose **Site Actions > Edit Page**.
- 2 Click **Add a Web Part**, then choose the list(s) that you want to add as Web Parts to that area of the page.

EXCEPTION: The Web Statistics KPI List is configured and added to the page using a different method. See "To configure the Web Statistics KPI, " following.

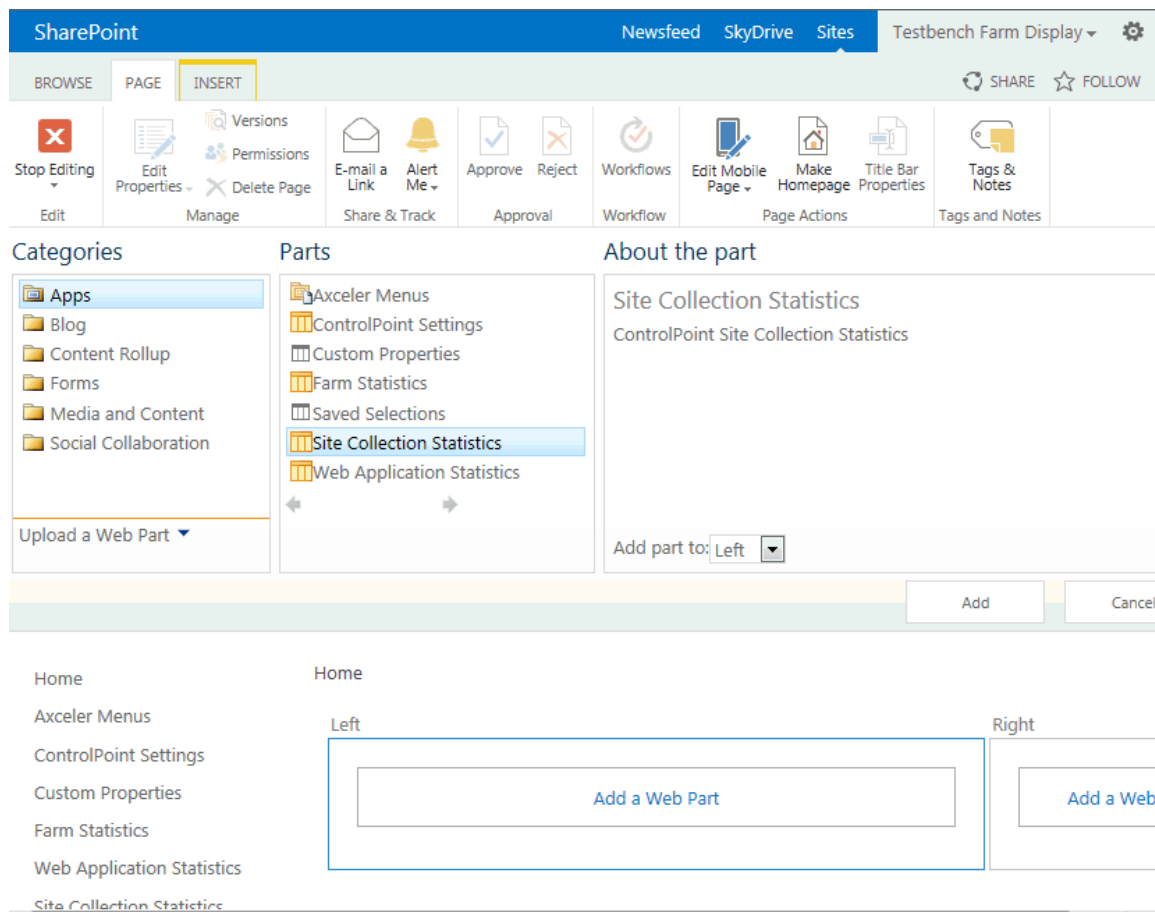

You can either use the default view that has been defined for the list or create a custom view.

You can, for example, change the display order of columns; display a subset of columns; display columns that are not included in the default view; add a calculated column; display column totals.

- Example: Site Collection Statistics with calculated columns to track size and storage utilization.

Group By

Totals

Select one or more totals to display.

Column Name	Total
# Files	None
# Lists	None
# Sites	None
# Users Last Day	None
Requests Last 30 Days (Approx)	None
Requests Last Day	None
Site Collection Name	None
Total Size (MB)	None
URL	None

Style

Folders

100%

Metalogix ControlPoint Configuration Site

Site Collection Statistics ⓘ


Search this site


Home	Site Collection Name	URL	# Sites	# Lists	# Files	Total Size (MB)
Axceler Menus						Sum = 349.93
ControlPoint Settings	2010RPTSECOVRW2	http://qa2013farm4:7304/sites/2010RPTSECOVRW2	3	36	337	3.29
Custom Properties	2013 Low quota TeamSite	http://qa2013farm4:7304/sites/2013lowquota	1	21	379	2.33
Farm Statistics	2013 Document Center	http://qa2013farm4:7304/sites/2013DocCenter	3	39	613	3.15
Web Application Statistics	2013RPTSECOVRW1	http://qa2013farm4:7304/sites/2013RPTSECOVRW1	3	29	480	2.52
Recent	2013 ACTSECOVRWR2	http://qa2013farm4:7304/sites/2013ACTSECOVRWR2	3	29	480	2.52
Site Contents	2010RPTSECOVRWR1	http://qa2013farm4:7304/sites/2010RPTSECOVRWR1	3	36	337	3.29
	2010 ACTSECOVRWR1	http://qa2013farm4:7304/sites/2010ACTSECOVRWR1	3	36	339	3.29
	2010 Biz Admin Tester20	http://qa2013farm4:7304/sites/2010BizAdminTester20	3	24	189	2.27
	QA TeamSite	http://qa2013farm4:7304/sites/QA TeamSite	4	39	619	3.63

- Example: Farm Statistics filtered to show only "high priority" metrics.

Filter

Show all of the items in this view, or display a subset of the items by using filters. To filter on a column based on the current date or the current user of the site, type **[Today]** or **[Me]** as the column value. Use indexed columns in the first clause in order to speed up your view. Filters are particularly important for lists containing 5,000 or more items because they allow you to work with large lists more efficiently. [Learn about filtering items.](#)

☐  Show all items in this view

☒  Show items only when the following is true:

Show the items when column
 Statistic Name
 is equal to
 # Sites




☐ And ☒ Or

When column
 Statistic Name
 is equal to
 Requests Last 30 Days (approx)

☐ And ☒ Or

When column
 Statistic Name
 is equal to
 Total Size (MB)

Farm Statistics

Statistic Name	Value
# Sites 	278
Total Size (MB) 	384.11
Requests Last 30 Days (Approx) 	1097

The GDPR Dashboard

If your organization is subject to General Data Protection Regulation (GDPR) compliance, the GDPR dashboard provides an overview of how your organization is using ControlPoint to manage regulation-sensitive areas of your SharePoint environment.


GDPR dashboard statistics are populated based on usage of the following functionality:

- [SharePoint Audit Settings](#)
- [Sensitive Content Manager](#)
- [ControlPoint Policies](#)

- [Governance Policy Manager](#)
- [ControlPoint Sentinel](#)

To access the GDPR dashboard:

From SharePoint Hierarchy farm node, choose **GDPR Dashboard**.

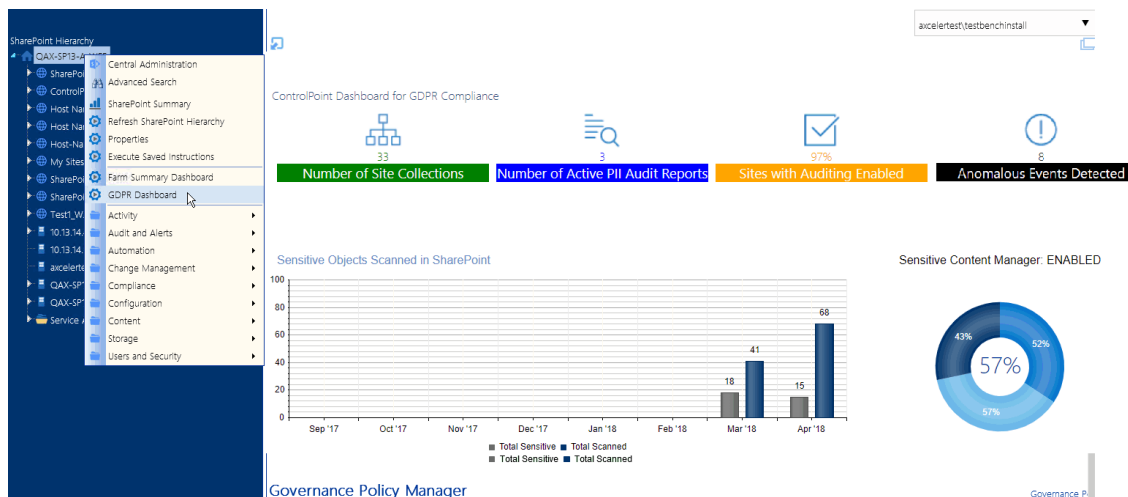


The GDPR Dashboard displays the following information:

- the **Number of Site Collections** in your farm (excluding Central Administration) as of the last ControlPoint Discovery run.
- If your organization uses [Sensitive Content Manager](#):
 - **Number of Active PII Audit Reports** represents the number of Sensitive Content Manager jobs scheduled to be scanned and [ControlPoint policies](#) created to scan documents.
 - **Sensitive Objects Scanned in SharePoint** shows the number of documents determined to contain sensitive content compared to all items scanned within a given month.
 - the **Sensitive Content Manager: ENABLED** donut graph shows the following percentages:
 - The light blue section represents the percentage of site collections containing content for which at least one scan has been performed PLUS site collections that have at least one Active PII Audit Report.

NOTE: This percentage is also the number that displays inside the donut graph.

- The medium blue section represents the percentage of site collections containing content for which at least one scan has been performed.
- the dark blue section represents site collections that have had no Sensitive Content Manager activity.

If you have never used Sensitive Content Manager, this section will always display 0%.



- If your organization uses [ControlPoint Sentinel](#), **Anomalous Events Detected** represents the number of deviations in document views and downloads from individual users' "typical" daily usage patterns
- **Sites with Auditing Enabled** represents the percentage of site collections within your SharePoint farm for which *all* audit settings are enabled.
 NOTE: If *any* of the site collection audit settings are not enabled or if audit settings are enabled at the site level or below (which is possible if you are using [ControlPoint Manage Audit Settings](#) functionality), the site collection will not be counted in this percentage.
- If your organization uses [ControlPoint Governance Policy Manager](#), the bottom section lists all of the Governance Policies that currently exist for the farm.

Governance Policy Manager		Governance Policy Manager Quick Start Guide
Policy Name	Scope	Status
FarmPolicyHT	http://qa2013farm4:1919/	Inactive
ITAR		No Scope Defined
JD Global Monitoring Security Policy	http://qa2013farm4:33778/	Activated
JR Acti		No Scope Defined

Setting Object Properties

You can use ControlPoint to set properties for site collections, sites, and lists.

In a multi-farm environment, properties can be set across multiple farms; the user interface for the home farm is always used. Therefore, if your multi-farm installation includes different SharePoint versions (for example, both 2016 and 2019) or variations (for example, ControlPoint Standard and ControlPoint Online), which necessitates differences in the user interface, some options may be missing—or not valid—for the remote farm.

Setting Site Collection Properties

Set Site Collection Properties is a ControlPoint action that lets you set the following properties for one or more site collections within a SharePoint farm:


- Site Collection Administrators
- Site Collection Quota
- Portal Site Connections
- Site Collection Audit Settings
- Site Collection Search Settings



- SharePoint Designer Settings (SharePoint Server)

• Audit Log Trimming **To set site collection properties:**

- 1 [Select the site collection\(s\) for which you want to set properties.](#)
- 2 Choose **Configuration > Set Site Collection Properties.**
- 3 In the **Parameters** section, specify each property you want to set as you would if you were performing Site Collection Administration via SharePoint Site Settings.

EXCEPTION: Set Site Collection Audit Settings as you would if you were using the [ControlPoint Manage Audit Settings](#) action.

Set Site Collection Properties > Select parameter(s) to act on 

Site Collection Administrators	
Add Site Collection Administrators:	<input type="text" value="James Joyce ;"/>  
Site Collection Quota	
<input checked="" type="checkbox"/> Set Site Quota Template to:	<input type="text" value="Individual Quota"/>
<input checked="" type="checkbox"/> Limit site storage to a maximum of:	<input type="text" value="1,000"/> MB
<input checked="" type="checkbox"/> Send warning e-mail when site storage reaches:	<input type="text" value="900"/> MB
Portal Site Connections	
<input checked="" type="radio"/> Leave Portal Site Connections untouched <input type="radio"/> Clear Portal Site Connections <input type="radio"/> Connect to portal site:	
Portal Web Address:	<input type="text"/>
Portal Display Name:	<input type="text"/>
Site Collection Audit Settings	
<input checked="" type="radio"/> Leave Audit Settings untouched <input type="radio"/> Disable Audit <input type="radio"/> Enable Audit	
Lists, Libraries, and Sites	Documents and Items
Effective for Site Collections Only	
<input type="checkbox"/> Editing users and permissions	<input type="checkbox"/> Editing items
<input type="checkbox"/> Searching site content	<input checked="" type="checkbox"/> Checking out or checking in items
<input type="checkbox"/> Editing content types and columns	<input type="checkbox"/> Moving or copying items to another location in the site
<input type="checkbox"/> Deleting child objects	<input checked="" type="checkbox"/> Deleting or restoring items
Effective for All SharePoint Objects	
<input type="checkbox"/> Opening or downloading documents, viewing items in lists, or viewing item properties	

NOTE: Changes to SharePoint Designer Settings will impact only users who are **not** Site Collection Administrators. SharePoint maintains SharePoint Designer Settings for Site Collection Administrators at the Web application (not Site Collection) level.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Setting Site Properties

You can use the ControlPoint Set Site Properties action to set the following properties of one or more sites within a SharePoint farm:

- icon (that is, the logo used for the site)
- site access settings
- site navigation settings
- the left navigation panel (tree view)
- regional settings
- whether or not to include the site(s) in SharePoint search results
- whether or not to enable RSS feeds for the site(s).

For SharePoint Server farms running the Managed Metadata Service Application, you can also "tag" sites with Custom Properties that have been defined by the ControlPoint Application Administrator, for use as parameters in ControlPoint Advanced Searches. The procedure for defining Custom Properties is covered in the *ControlPoint Administration Guide*.

To set site properties:

- 1 [Select the object\(s\) for which you want to set site properties](#).
- 2 Choose **Configuration > Set Site Properties**.
- 3 In the **Parameters** section, expand the node for the category of properties you want to set.

- 4 Check the box that describes the property you want to set.

☒ **Add a Site Icon**

Associate a logo with sites by entering the URL to an image file. If the file location has a local relative address (e.g., `/_layouts/images/logo.gif`) you must copy the file to that location on each front-end web server.

Note: This logo will replace the existing site logo for all selected sites.

Icon URL

`http://Metalogix:1818/_layouts/Axceler/images/Metalogix_100.jpg`

[Click here to test](#)

Icon Description (used as alternative text for the icon.)

Metalogix logo

NOTE: If you do not check the applicable property box, ControlPoint will not carry out that action.

- 5 Specify the parameter(s) for the selected property as you would if you were setting it via SharePoint Site Settings. Consult your SharePoint documentation for detailed instructions.

If you have a SharePoint Server farm running the Managed Metadata Service Application and the ControlPoint Application Administrator has defined Custom Properties, they are selectable from within the **Custom Properties** section. (This section is not included for Foundation farms.)

☒ **Custom Properties**

☒ Modify Custom Properties

		Clear	
Location	<input type="text" value="Woburn"/>		
Department	<input type="text" value="Development"/>		

Custom Properties can be used as ControlPoint Advanced Search parameters to locate sites with which they have been associated via this action.

Advanced Search > Select parameter(s) to act on

Site Name contains: <input type="text"/>	Created: <input type="text" value=">="/> <input type="text"/>						
Site URL contains: <input type="text"/>	Last Modified: <input type="text" value=">="/> <input type="text"/>						
Site Template: <input type="text" value="Used"/> <input type="text" value="<Select>"/>	Files: <input type="text" value=">="/> <input type="text"/>						
Web Parts: <input type="text" value="Used"/> <input type="text" value="<Select>"/>	Size(KB): <input type="text" value=">="/> <input type="text"/>						
System Master Page: <input type="text" value="Used"/> <input type="text" value="<Select>"/>	Quota(MB): <input type="text" value=">="/> <input type="text"/>						
Site Theme: <input type="text" value="Used"/> <input type="text" value="<Select>"/>	% of Quota: <input type="text" value=">="/> <input type="text"/>						
Security: <input checked="" type="radio"/> Any <input type="radio"/> Inherited <input type="radio"/> Unique							
User: <input type="text"/>							
has Permissions: <input type="text" value="Any"/>							
Custom Properties <table border="1"> <tbody> <tr> <td>Department</td> <td><input type="text" value="HR;"/></td> <td></td> </tr> <tr> <td>Location</td> <td><input type="text" value="Corporate;"/></td> <td></td> </tr> </tbody> </table>		Department	<input type="text" value="HR;"/>		Location	<input type="text" value="Corporate;"/>	
Department	<input type="text" value="HR;"/>						
Location	<input type="text" value="Corporate;"/>						

- 6 Complete Steps 2-5 for each category of properties you want to set.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Duplicating Site Properties

The Duplicate Site Properties action lets you copy selected properties from a SharePoint site to one or more other sites.

You can, for example, set up and configure a single model site, then copy its settings to any number of other sites for which you want to use the same settings.


To duplicate site properties:

- 1 [Select the site whose properties you want to duplicate](#).

NOTE: Unlike many other ControlPoint operations—which are initiated for *target* objects (that is, objects that you want to act *on*)—you initiate the Duplicate Site Properties operation by selecting the *source* site (that is, the site you want to copy *from*).

- 2 Choose **Configuration > Duplicate Site Properties**.

- 3 In the Target Selection picker, select the object(s) containing the site(s) that you want to copy properties to.

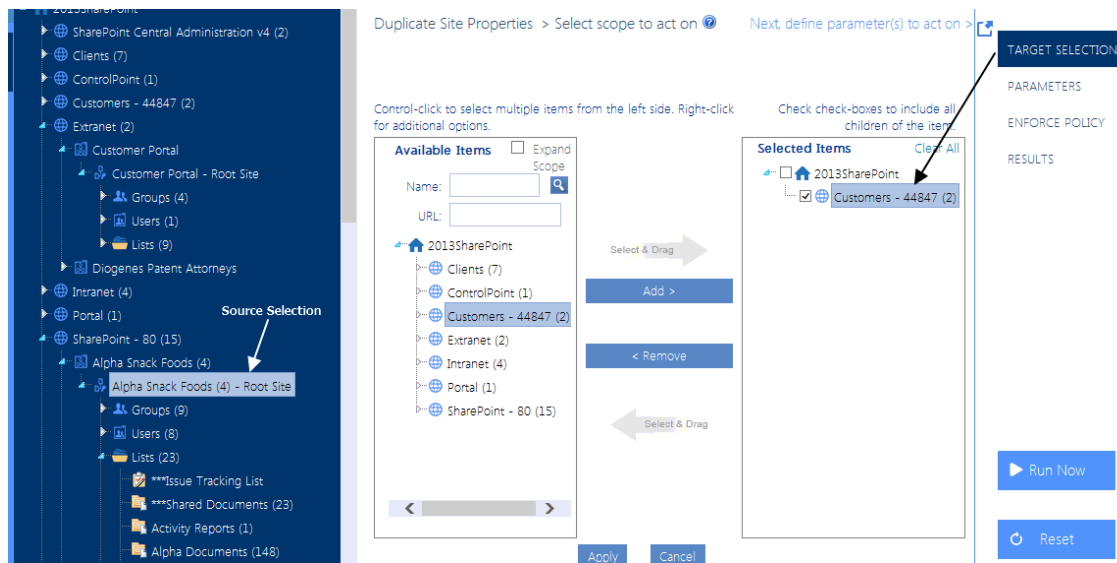

- 4 Click **[Apply]**.
- 5 In the Parameters section, check each box that corresponds to the property you want to copy to the target site(s).

Site Access Settings

☒ **Allow Requests for access**

Send all requests for access to the following e-mail address:

☒ **Allow Anonymous users access to:**

☒ Entire Web Site
☐ List and Libraries
☐ Nothing

Site Navigation Settings

Specify navigation items you want to display on the navigation link bars of these sites. Terms in site navigation of the subsite that contains these items.

Tree View

Note that, with the exception of Site Theme, each field pre-populates with the value currently assigned to the source site (that is, the value that will be applied to the target sites). These fields are not editable.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

If you schedule the action, ControlPoint will use the settings that exist for the source object *at the time the job is run* (not at the time the job was created).

Setting List Properties

Use the ControlPoint Set List Properties action to set the following properties of one or more lists within a SharePoint farm:

- name, description, and navigation
- version settings
- audience targeting
- validation settings and default column values
- advanced settings.

You can also specify the list type(s) to which you want to apply the properties.

This feature is not available at the farm (tenant) scope.

To set list properties:

- 1 [Select the object\(s\) for which you want to set list properties](#).
- 2 Choose **Configuration > Set List Properties**.

- 3 In the **Parameters** section, expand the node for the category of properties you want to set.

Set List Properties > Select parameter(s) to act on 

☒ Name, Description and Navigation

☒ Versioning Settings

☒ Audience Targeting

☒ Validation Settings

☒ Default Column Values

☒ Advanced Settings

☒ Other Settings

Select List Types To Process:

<ALL>
Announcements List
Contacts List
Data Connection Library

- 4 Check the box that describes the property you want to set.

NOTE: If you do not check the applicable property box, ControlPoint will not carry out that action.

- 5 Specify the parameter(s) for the selected property as you would if you were setting it via SharePoint List Settings. Consult your SharePoint documentation for detailed information.


☒ **Modify Version History**

Specifies whether a version is created each time you edit an item in this list or library. 

☐ No Versioning

☒ Create major versions. Example: 1, 2, 3, 4

☐ Create major and minor (draft) versions. Example: 1.0, 1.1, 1.2, 2.0


Optionally limit the number of versions to retain: 

☒ Keep the following number of major versions (0-50000, 0=Unlimited versions)

3


☐ Keep drafts for the following number of major versions (0-50000, 0=Unlimited versions)

☐ Purge old versions to match version settings (Recommend performing backup prior to this action)

NOTE: The  icon displays beside any property that does not apply to all list types. Click this icon for a summary of exceptions for which the property either will or will not be set.

- 6 Complete Steps 3-5 for each category of properties you want to set.

- 7 If you want to limit the operation to one or more specific list types, **Select List Types to Process**.

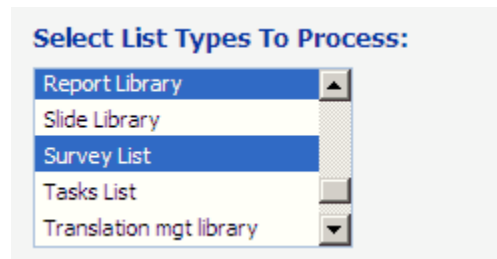

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Duplicating List Properties

The Duplicate List Properties action lets you copy selected properties from a SharePoint list to one or more other lists.

You can, for example, set up and configure a single model list, then copy its settings to any number of other lists for which you want to use the same settings.


To duplicate list properties:

- 1 [Select the list whose properties you want to duplicate](#).

NOTE: Unlike many other ControlPoint operations—which are initiated for *target* objects (that is, objects that you want to act *on*)—you initiate the Duplicate List Properties operation by selecting the *source* list (that is, the list you want to copy *from*).

- 2 Choose **Configuration > Duplicate List Properties**.
- 3 In the Target Selection picker, select the object(s) that you want to copy list properties to.

NOTE: If you select an object above the list level, you will have the option of limiting the operation to one or more specific *types* of list within that scope.

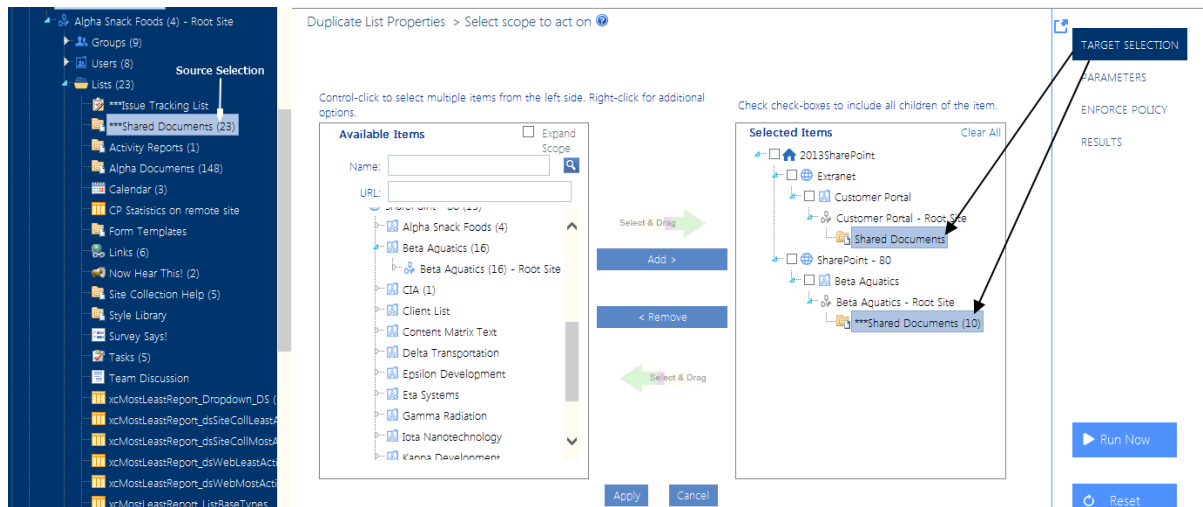

- 4 Click **[Apply]**.
- 5 In the Parameters section, check each box that corresponds to the property you want to copy to the target list(s).

☒ Advanced Settings

☒ Modify Content Types

Specifies whether to allow the management of content types on this list or library. Each content type will appear on the new button and can have a unique set of columns, workflows and other behaviors.

☐ Yes ☒ No

☒ Modify E-Mail Notification


Send e-mail when ownership is assigned or when an item has been changed.

☐ Yes ☒ No

Note that:

- The Parameters section displays properties that are valid for the selected source list type.
- With the exception of Modify Retention Policy, each field pre-populate with the value currently assigned to the source list (that is, the value that will be applied to the target lists). These fields are not editable.

- 6 If you want to limit the operation to specific types of lists, **Select List Types to Process**.

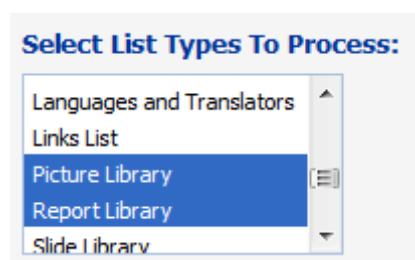

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

If you schedule the action, ControlPoint will use the settings that exist for the source object *at the time the job is run* (not at the time the job was created).

Managing Site Collection and Site Features

Manage Site Collection Features and **Manage Site Features** are ControlPoint actions that enable you to activate or deactivate features across one or more SharePoint site collections or sites. In addition to managing features that can be activated/deactivated via the SharePoint user interface, you can also activate/deactivate *hidden* features. (In SharePoint, hidden features must be activated/deactivated using a command line, custom code, or through dependency of another feature.)

You can use these actions in conjunction with the Site Collection Property Report and Site Property Report to manage the configuration of SharePoint features throughout your farm.

In a multi-farm environment, features can be managed across multiple farms; the user interface is populated with features that have been deployed on the home farm. Therefore, if your multi-farm installation includes different SharePoint versions (for example, both 2013 and 2016) or variations (for example, Foundation and Server), which necessitates differences in the user interface, some options may be missing—or not valid—for the remote farm. For example, if a feature is selected that has not been deployed on a remote farm, the activation or deactivation of the feature will be skipped for that farm.

To manage site collection or site features:

- 1 [Select the object\(s\) for which you want to manage features](#).
- 2 Choose the appropriate option:
 - **Configuration > Manage Site Collection Features.**

OR

▪ **Configuration > Manage Site Features.**

All of the available site collection or site-level features (depending on your selection) that can be activated/deactivated via the SharePoint user interface display.

NOTE: If you also want to manage *hidden* features (that is, features that cannot be activated/deactivated via the SharePoint user interface), check the **Show Hidden** box. Each hidden features will be identified by a check mark in the Hidden column.

- 3 Select the action you want to carry out: **Activate** or **Deactivate**.
- 4 If you want to override certain errors that could occur while attempting to activate a feature, check the **Force activation/deactivation** box.

NOTE: An error might occur, for example, if a feature becomes corrupted and you cannot uninstall it. The force option allows you to overwrite the existing feature.

- 5 Highlight each feature you want to act on. (You can select multiple line items in the conventional manner by using the **[SHIFT]** or **[CTRL]** key.)

NOTE: Any site collections or sites that are already in the selected state will be skipped.

Example: Deactivate Site Collection Workflows

Manage Site Collection Features > Select parameter(s) to act on ?

☐ Activate Selected ☒ Deactivate Selected ☐ Show Hidden ☐ Force activation/deactivation

Name	Description	Hidden
EmailViewerAspContro	Description for EmailViewerAspControl	
Metalogix Organizer for SharePoint - Ribbon Controls	UI customizations supporting batch content load, classification and management.	
Custom Site Collection Help	Creates a Help library that can be used to store custom help for this site collection.	
Open Documents in Client Applications by Default	Configures links to documents so they open in client applications instead of Web applications, by default.	
EmailViewerAsp	Email Viewer for Metalogix exchange migrator	
Report Server Integration Feature	Enables rich reporting using Microsoft SQL Server Reporting Services.	
Metalogix Organizer for SharePoint - Reorganizer	Enables the Reorganization controls for the Site Collection.	
Three-state workflow	Use this workflow to track items in a list.	

Example: Activate ControlPoint Site Features

(Note that these are hidden features)

Manage Site Features > Select parameter(s) to act on 

☒ Activate Selected ☐ Deactivate Selected ☒ Show Hidden ☐ Force activation/deactivation

Name ▲	Description	Hidden
Lists		
Central Administration Links	Links for the Operations and Application Management pages in the Central Administration site.	✓
Circulation List	This feature provides support for Circulation list types.	✓
Contacts Lists	Provides support for contacts lists for a site.	✓
ControlPoint for Site Admins, customizable	This feature adds a link to a customizable ControlPoint screen for Site Administrators onto the Site Settings page and the Site Actions menu	✓
ControlPoint Menus for Site Settings	This feature installs a number of ControlPoint menus onto the Site Settings page	✓
ControlPoint Permissions Management for Site Admins	This feature adds a link to a customizable ControlPoint Permissions Management screen for Site Administrators onto the Site Settings page and the Site Actions menu	✓
ControlPoint Site Provisioning	Creates a link to the site provisioning page on the current web site.	✓
Custom Lists	Provides support for custom lists for a site.	✓

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Managing Audit Settings

The **Manage Audit Settings** action lets you to manage (enable and disable) SharePoint audit settings from within the ControlPoint application interface.

NOTE: Using "Manage Audit Settings" to disable or enable Audit flags will *not* affect auditing enabled through a SharePoint Information Management Policy for a list or library. These Audit flags are enabled at the Content Type level, and disabling auditing at the Site Collection level will not disable Content Type auditing.

In a multi-farm environment, audit settings can be managed across multiple farms.

To access the Manage Audit Settings workspace:

- 1 [Select the object\(s\) whose audit settings you want to manage.](#)

NOTE: If you select the entire farm or one or more Web applications or site collections, the audit settings will be applied to the site collection(s) and inherited by child objects (sites, libraries, and lists). If you want a site collection to be included in the [GDPR Dashboard](#) **Sites with Auditing Enabled** calculation, you must enable audit settings at the site collection level or above.

- 2 Choose **Audit and Alerts > Manage Audit Settings**.

It is important to note that if your selection includes a single object, audit settings currently enabled for that object will be checked. (Enabled settings will not be checked if your scope includes multiple objects.)

To enable or change audit settings:

- 1 Select **Enable Audit**.
- 2 Use the information in the following table to determine the appropriate action to take.

If you want to ...	Then ...
reset all audit settings for the selected objects*	<ul style="list-style-type: none">• select Reset Audit Settings to the settings below• check/uncheck each setting you want to enable/disable.
add to existing audit settings for the selected objects*	<ul style="list-style-type: none">• select Add the settings below to the existing Audit Settings• check each setting you want to add. <p>NOTE: Remember that existing audit settings will appear checked only if they were set explicitly for all objects within the scope of your selection.</p>

Audit Settings

☐ Disable\Inherit Audit
 ☒ Enable Audit

☒ Reset Audit Settings to the settings below
 ☐ Add the settings below to the existing Audit Settings
 [Check All](#)
[Uncheck All](#)

Lists, Libraries, and Sites

Documents and Items

Effective for Site Collections Only

☐ Editing users and permissions
 ☐ Searching site content
 ☐ Editing content types and columns
 ☐ Deleting child objects

☒ Editing items
 ☐ Checking out or checking in items
 ☐ Moving or copying items to another location in the site
 ☒ Deleting or restoring items

Effective for All SharePoint Objects

☒ Opening or downloading documents, viewing items in lists, or viewing item properties

* For most audit settings, SharePoint will only recognize and report on those that have been set at the site collection level (in the Effective for Site Collections Only section). The only setting that can be set explicitly at the site or list/library level that SharePoint will recognize is **Opening or downloading documents, viewing items in lists, or viewing item properties** (in the Effective for all SharePoint Objects section).

If you are enabling audit settings at the site collection level or above, all settings (except for **Deleting child objects**) *must* be enabled if you want the affected site collections to be included in the [GDPR Dashboard Sites with Auditing Enabled](#) calculation.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

To disable audit settings:

Select **Disable\Inherit Audit**.

If you select this option for site collections, auditing for individual sites and lists/libraries within the site collection depends on whether auditing has been enabled for the site or list/library. If you select it for sites, libraries, or lists, whether SharePoint captures audit events depends on whether auditing has been enabled for the site collection. (By design, sites, lists, and libraries inherit most audit behavior from the site collection.)

NOTE: If you disable the auditing of any event type(s) for which ControlPoint alerts have been scheduled, you will no longer receive alerts for those events. See also [Setting ControlPoint Alerts](#).

Creating and Managing SharePoint Alerts

The ControlPoint Create SharePoint Alerts action lets you create alerts for users in your SharePoint environment. You can create SharePoint alerts for sites, lists, and individual list items.

You can also change and/or delete SharePoint alerts using the [Manage SharePoint Alerts](#) action.

In a multi-farm environment, alerts can be created and managed for the home farm only.

Creating SharePoint Alerts


You can set alerts for SharePoint users from the ControlPoint application interface using the **Create SharePoint Alerts** action.

To create SharePoint alerts:

- 1 [Select the object\(s\) for which you want to set alerts](#)).
- 2 Choose **Audit and Alerts > Create SharePoint Alerts**.

NOTE: If you want to set alerts for individual items within the list(s), follow the procedure for [Selecting List Items on Which to Perform a ControlPoint Operation](#).

- 3 [Select the user\(s\) for whom you want to create the alert](#).
- 4 Complete the remaining parameters as you would if you were creating the alert in SharePoint.
Users will receive alert emails only if they have a minimum of **Read** permissions for the selected object(s). For additional SharePoint alert troubleshooting tips, refer to the following article:
<http://sharepointalert.info/troubleshooting-sharepoint-alerts/>

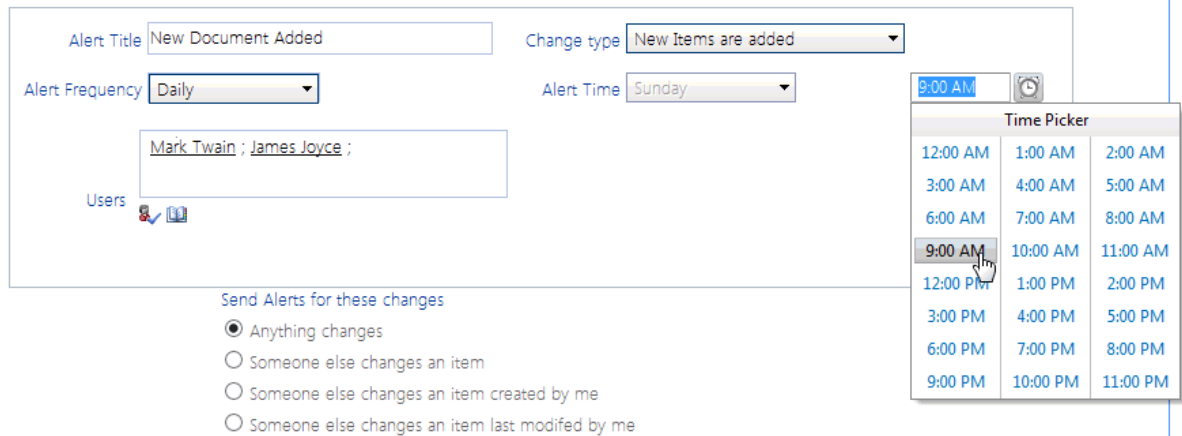

Alert Title: Change type:

Alert Frequency: Alert Time:

Time Picker:

12:00 AM	1:00 AM	2:00 AM
3:00 AM	4:00 AM	5:00 AM
6:00 AM	7:00 AM	8:00 AM
9:00 AM	10:00 AM	11:00 AM
12:00 PM	1:00 PM	2:00 PM
3:00 PM	4:00 PM	5:00 PM
6:00 PM	7:00 PM	8:00 PM
9:00 PM	10:00 PM	11:00 PM

Users:

Send Alerts for these changes:

- ☒ Anything changes
- ☐ Someone else changes an item
- ☐ Someone else changes an item created by me
- ☐ Someone else changes an item last modified by me

NOTE: If your selection includes lists of different types, **Send Alerts for these changes** will include options that are common to both. (For example, if your selection includes both Announcements and Tasks, the options that are unique to each type (such as "An announcement with an expiration date is added or changed" and "A task is assigned to me") will not be available for selection.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Managing SharePoint Alerts

Use the **Manage SharePoint Alerts** action to delete or update alerts on lists and libraries that have been set for users in your SharePoint environment. Deletions are always performed in real time. Updates can either be performed in real time or scheduled.



To access the Manage SharePoint Alerts workspace:

- 1 [Select the object\(s\) containing the alerts that you want to manage.](#)
- 2 Choose **Audit and Alerts > Manage SharePoint Alerts**.
A table displays with information about all of the alerts within the scope of your selection. (Note that, if the alert was set on the list itself, **Item** and **Item ID** will be blank).
- 3 If you want to narrow the list to only alerts that meet specific criteria:
 - a) in the **Search Parameters** section, specify the criteria you want to use.

Manage SharePoint Alerts > Select parameter(s) to act on ⓘ

☐ Search Parameters

Alert Title Change type Alert Frequency

Users  

- b) Click **[Find]**.
- 4 The **Search Parameters** section collapses and the **Update/Delete** section expands automatically.
 - 5 Check the **Select** box to the left of the row(s) containing the alerts that you want to update or delete.

Select All	Update Selected	Delete Selected														
Select	Alert Title	List Title	User for Alert	Alert Type	Change Type	Frequency	Alert Time	Item	Item ID	Send filter	Web	Site Collection	Web Application	Web URL	List Url	
<input checked="" type="checkbox"/>	New Document Added	Phone Call Memo	i:0#.w axcelertest\marktwain	List	Add	Daily	07:00:00			Anything changes	Help Desk	Help Desk	Clients	http://clients/sites/Help	Lists/F	
<input type="checkbox"/>	New Document Added	Resources	i:0#.w axcelertest\marktwain	List	Add	Daily	07:00:00			Anything changes	Help Desk	Help Desk	Clients	http://clients/sites/Help	Lists/F	
<input checked="" type="checkbox"/>	New Document Added	Group Calendar	i:0#.w axcelertest\marktwain	List	Add	Daily	07:00:00			Anything changes	Help Desk	Help Desk	Clients	http://clients/sites/Help	Lists/C	
<input type="checkbox"/>	New Document Added	Team Discussion	i:0#.w axcelertest\marktwain	List	Add	Daily	07:00:00			Anything changes	Help Desk	Help Desk	Clients	http://clients/sites/Help	Lists/T	
<input checked="" type="checkbox"/>	New Document Added	Style Library	i:0#.w axcelertest\marktwain	List	Add	Daily	07:00:00			Anything changes	Help Desk	Help Desk	Clients	http://clients/sites/Help	Style L	
<input type="checkbox"/>	New Document Added	Announcements	i:0#.w axcelertest\marktwain	List	Add	Daily	07:00:00			Anything changes	Help Desk	Help Desk	Clients	http://clients/sites/Help	Lists/#	
<input type="checkbox"/>	New Document Added	Links	i:0#.w axcelertest\marktwain	List	Add	Daily	07:00:00			Anything changes	Help Desk	Help Desk	Clients	http://clients/sites/Help	Lists/L	

NOTE: If you want to select all alerts in the table, click [**Select All**].

Alert Title

Change type

Alert Frequency

- Unchanged
- Immediate
- Daily
- Weekly

Alert Time

Alerts for these changes

- ☐ Everything changes
- ☐ Someone else changes an item
- ☐ Someone else changes an item created by me
- ☐ Someone else changes an item last modified by me

6 Use the information in the following table to determine the appropriate action to take.

If you want to ...	Then ...
update one or more alert criteria	select the criteria you want to change. Now you can either: <ul style="list-style-type: none"> update the alert(s) immediately (by clicking the [Update selected] button OR <ul style="list-style-type: none"> complete the Enforce Policy section and <i>schedule</i> the update to run on a one-time or recurring basis.
delete the selected alert(s)	click [Delete selected].

Setting ControlPoint Alerts

Use ControlPoint alerts if you want to be notified when specific events occur within site collections in your SharePoint farm.

Unlike SharePoint alerts, which notify a *user* to changes that occur within libraries and lists within sites, ControlPoint alerts notify *an administrator* of changes made to the SharePoint environment, including:

- the creation of site collections
- the creation or deletion of sites, and
- events captured in [SharePoint audit logs and change logs](#).

In a multi-farm environment, you can set ControlPoint alerts for the home farm only.

This feature is not available at the farm (tenant) scope.

Scheduled vs. Real-time Alerts

- If you run ControlPoint Alerts on a scheduled basis:

- Any events that occurred after the Start Date specified in the Scheduler section will display immediately in the Results section.
- The first time the scheduled job runs, a notification email will be sent with a list of all events that have occurred since the Start Date specified in the Scheduler section*.
 EXCEPTION: If the action is scheduled to run on a recurring basis and the interval is in *minutes*, the amount of historical data that is included the first time the job runs is determined by the ControlPoint Setting MaxAlertProcessingPeriod.
- (in the case of a recurring schedule), every subsequent time the job runs the notification email will include all events that occurred since the last successfully-completed job run.*
 *NOTE: Unlike other scheduled jobs, for which a notification email is sent whenever the job runs, an email is sent for ControlPoint alerts *only* if there are events to report.

If you choose to run alerts in real-time (using the **[Run Now]** option), all of the events that occurred since the Start Date specified in the Scheduler section display in the Results section (a notification email will not be sent).


NOTE: Be aware that some events may not appear immediately, as it can take several minutes for them to be recorded in a SharePoint log.


To set ControlPoint Alerts:

- 1 [Select the object\(s\) for which you want to set ControlPoint alerts.](#)
- 2 Choose **Audit and Alerts > ControlPoint Alerts**.
- 3 In the Parameters section, select each alert you want to set:
 - **Site Collection Alerts** - Check the appropriate box to receive an alert of sites added or sites deleted.
 - **Site, List, and Item Alerts:**
 - select the **User(s)** whose actions you want to audit (or leave blank for all users)
 - enter a *relative URL* (note that you can enter a url down to the item level; you can also use an asterisk (*) at the beginning and end of a url as wildcards)

EXAMPLES

- sites/al*
- sites/alpha/shared documents/xcrSummaryReport.pdf
- select one or more **Event** types from the list box. Use the arrows to move the events to the "selected" list on the right. Refer to the topic [Events Captured in SharePoint Logs](#) for guidance in selecting the appropriate event type(s).

CAUTION: Although you have the option of viewing ALL events (by clicking the  icon), if you select this option your result set may be extremely large. One reason is that SharePoint records some events (such as a View) as a series of several events. Also, some event types (such as Update) may encompass a wide variety of events.

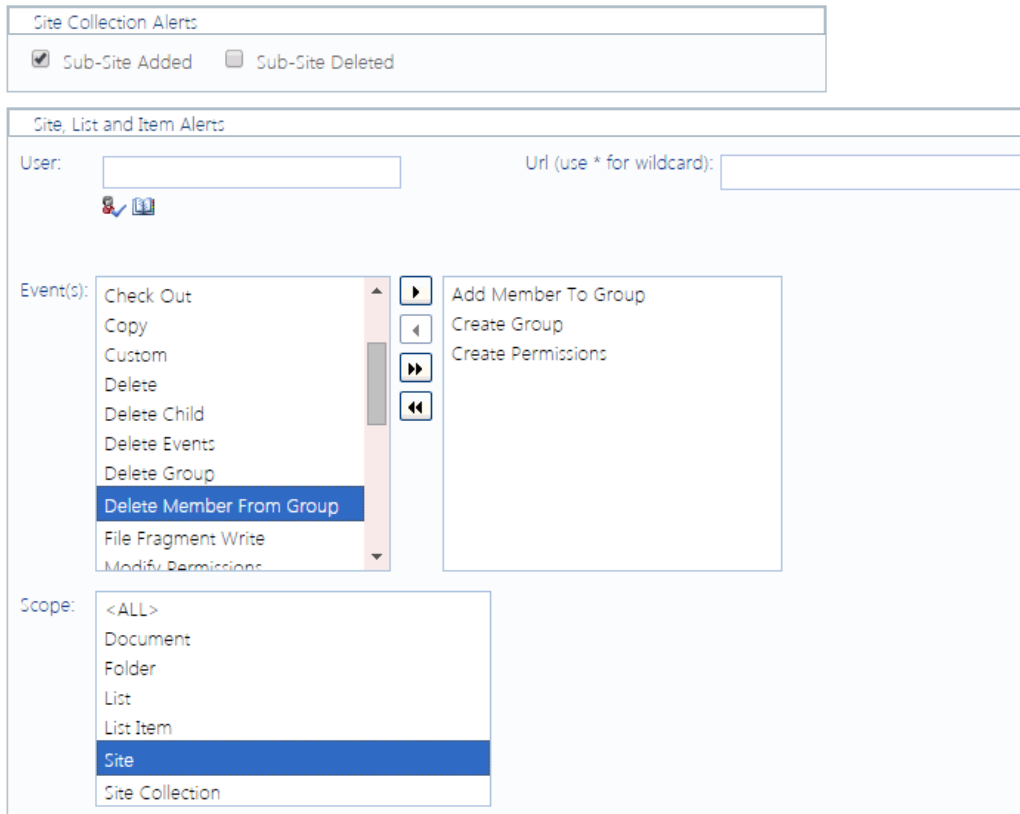

The screenshot shows the 'ControlPoint Alerts' configuration window. It is divided into two main sections: 'Site Collection Alerts' and 'Site, List and Item Alerts'.

Site Collection Alerts: This section has two checkboxes: 'Sub-Site Added' (which is checked) and 'Sub-Site Deleted' (which is unchecked).

Site, List and Item Alerts: This section contains several fields and a list of events.

- User:** A text input field with a small icon to its left.
- Url (use * for wildcard):** A text input field.
- Event(s):** A list of events with a scroll bar. The events are: Check Out, Copy, Custom, Delete, Delete Child, Delete Events, Delete Group, **Delete Member From Group** (highlighted), File Fragment Write, and Modify Permissions. To the right of the list are four buttons: 'Add Member To Group', 'Create Group', 'Create Permissions', and an empty button.
- Scope:** A dropdown menu with the following options: <ALL>, Document, Folder, List, List Item, **Site** (highlighted), and Site Collection.

NOTE: When you set an alert for any event *other than* Site Added, SharePoint auditing will be enabled on the site collection(s) as part of the operation.

- 4 In the Schedule section, enter a **Start Date** (that is, the first date that events for which you want to be alerted occurred).
- 5 You can either:
 - run alerts immediately (by clicking the [Run Now] button)
 OR
 - [schedule the alerts to be evaluated and sent either one time or on a recurring basis.](#)

NOTE: You have the option of scheduling ControlPoint alerts to recur at intervals in the *minutes*. Be aware, however, that by default the ControlPoint Scheduled Job Review SharePoint timer service prompts the ControlPoint scheduler task to run every 10 minutes. By default, it checks for and initiates scheduled jobs during every "wake-up."

Managing Metadata

For SharePoint Server farms running the Managed Metadata Service Application, ControlPoint offers two actions for managing metadata :

- **Set Metadata Value** lets you change Managed Metadata, text, or numeric value values for one or more lists or libraries.
- **Create Managed Metadata** lets you create or update a Managed Metadata column on a list or library from an existing text column.

You can also [analyze Managed Metadata usage within your SharePoint Server environment](#).

NOTE: In order to work with Managed Metadata in ControlPoint, the Web application that hosts the ControlPoint Configuration Site Collection must be associated with every Managed Metadata Service Application used within the farm.

It is assumed that, when using these features, you are familiar with the use and behavior of SharePoint Content Types and Managed Metadata.







Setting Metadata Values

For a SharePoint Server farm running the Managed Metadata Service Application, ControlPoint lets you populate or change Managed Metadata, a single line of text, or numeric values within a list column for a selected Content Type.







You can also run a simulation of how the operation will be carried out before committing to the action. This can be valuable, for example, to identify exactly which items would be changed.


EXAMPLE:

The Shared Documents library on the company website has a Managed Metadata column called **Location**.

Type	Name	Modified	Modified By	Location
	ControlPoint User Guide Addendum	9/20/2011 6:13 PM	install	
	Davinci Component Diagram	9/20/2011 6:13 PM	install	Middletown
	Help Topic IDs	9/15/2011 5:19 PM	System Account	
	LabManual	9/15/2011 5:19 PM	System Account	
	Managing SharePoint Security	9/15/2011 5:08 PM	System Account	Los Angeles
 Add document				

I want to make sure that the value Woburn is added to the Location column for all documents in that library.

 Type	Name	Modified	Modified By	Location
	ControlPoint User Guide Addendum	9/20/2011 6:54 PM	System Account	Boston
	Davinci Component Diagram	9/20/2011 6:54 PM	System Account	Middletown; Boston
	Help Topic IDs	9/20/2011 6:54 PM	System Account	Boston
	LabManual	9/20/2011 6:54 PM	System Account	Boston
	Managing SharePoint Security	9/20/2011 6:54 PM	System Account	Los Angeles; Boston

 Add document

To set a metadata value:

- 1 [Select the object\(s\) whose column data you want to set.](#)
- 2 Choose **Automation > Set Metadata Value**.

Set Metadata Value > Select parameter(s) to act on 

Select a Column Type

☒ Managed Metadata ☐ Text ☐ Numeric


Select a Column

 Content Type Contains: [Get Content Types \(takes more time\)](#)

 Content Type:

 Column:

Choose a Value

 New Value: 

☐ Overwrite existing values

☐ Append to existing values

- 3 Select the type of metadata you want to set:
 - **Managed Metadata**
 - **Single Line Text**, or
 - **Numeric**
- 4 Use the information in the following table to determine the appropriate action to take.

If the scope of your selection ...	Then ...
<ul style="list-style-type: none"> is at the site level or above and/or includes more than one list 	go to the next step. NOTE: Before you can select a list column, you must first choose from available Content Types.
consists of only one list	you may want to go to Step 8. NOTE: It is not necessary to choose a Content Type for a single list. The Column drop-down will automatically populate with all of the columns used by that list.

- 5 If you want to filter content types by a specific text string, complete the **Content Type Contains** field.



- 6 To populate the **Content Type** drop-down with relevant Content Types, click **[Get Content Types]**.
- 7 Select a **Content Type** from the drop-down.

NOTE: If you have selected objects above the list level (for example, Web applications, site collections, and/or sites), the drop-down will be populated with all Content Types that are available for use by lists and libraries within the scope of your selection. If you have selected multiple lists, only Content Types that are currently *in use* by those lists will be available for selection.

- 8 Select the **Column** whose value you want to set. (This drop-down is populated with all of the columns used by lists within the scope of your selection that match the selected data type and content type.)


NOTE: If your selection includes more than one list, custom columns will only appear in the drop-down if they have been added to the Content Type at the site level. If a column was added directly to a particular list (or to a Content Type on the list), it will appear in the drop-down if your selection consists of *only* that list.

- 9 For **Choose a Value**:

a) Enter the new value for the column (For Managed Metadata, you can also click the   icon and select from available values.)

b) If you want to **Overwrite existing values**, check this box.

NOTE: If you leave this box unchecked and a value already exists in that column for an item, it will be skipped. If you selected a Managed Metadata column that allows multiple values, you also have the option to **Append to existing values**.

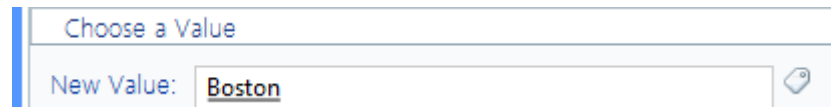

The screenshot shows a web interface element. At the top is a dropdown menu with the text 'Choose a Value'. Below it is a text input field with the label 'New Value:' and the text 'Boston' entered. To the right of the input field is a small icon of a document with a plus sign.

Now you can:

- run a simulation of the action (by clicking [**Run Simulation**])
- run the action immediately (by clicking [**Run Now**]),

OR

- [schedule the action to run at a later time](#).

OR

- [create an xml file with instructions for the analysis that can be run at a later time](#) (by clicking [**Save Instructions**]).

If you click [**Run Simulation**], ControlPoint runs through the process without actually making changes. A Task Audit will be generated with a description of what ControlPoint *would have done* if the action had been carried out. Text in the task description identifies it as a simulation.

If you chose the Run Now, option, after the action has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the action and displays in the Results section.

If you schedule the action, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint TaskAudit](#).

Creating a Managed Metadata Column from a Text Column (SharePoint Server)

The Create Managed Metadata action lets you map an existing text column in a SharePoint Server list or library to a Managed Metadata term. You can:

- map the text column to a Managed Metadata column that is already used by the list/library

OR






- create a new Managed Metadata column using a term set that has been defined either within the current site collection or in the Managed Metadata Service Application.


NOTE: If ControlPoint *creates* the Managed Metadata column, it will do so on the list-level Content Type. If you have defined a Content type at a higher level (such as the site collection or site) you may want to manually update the shared definition, and then use this action to populated the *values* of that column.

You can also run a simulation of how the operation will be carried out before committing to the action. This can be valuable, for example, to identify exactly which items would be changed.






EXAMPLE:

A SharePoint document library has a text field called Office, which identifies the Metalogix regional office that has ownership of a document.

Type	Name	Modified	Office
	ControlPoint User Guide Addendum	9/21/2011 11:03 AM	Woburn
	Davinci Component Diagram	9/21/2011 11:04 AM	East Podunk
	Help Topic IDs	9/21/2011 10:30 AM	
	LabManual	9/21/2011 11:09 AM	London
	Managing SharePoint Security	9/21/2011 11:04 AM	Los Angeles

 [Add document](#)


The SharePoint administrator wants to map that column to a new Managed Metadata column entitled Metalogix Office, populate the new column with only *valid* Managed Metadata, and rename the original column, which is retained for reference or cleanup.

Type	Name	Modified	Obsolete	Metalogix Office
	ControlPoint User Guide Addendum	9/21/2011 2:33 PM	Boston	Boston
	Davinci Component Diagram	9/21/2011 2:41 PM	East Podunk	
	Help Topic IDs	9/21/2011 2:33 PM		
	LabManual	9/21/2011 2:41 PM	London	London
	Managing SharePoint Security	9/21/2011 2:33 PM	Los Angeles	Los Angeles

To create Managed Metadata from a text column:

- 1 Select the object(s) for which you want to create Managed Metadata.

2 Choose **Automation > Create Managed Metadata**.

Create Managed Metadata > Select parameter(s) to act on 

Select a Source Text Column

Content Type Contains: Get Content Types (takes more time)

Content Type:

Source Column Name:


Update source column to:

Select a Target Managed Metadata Column

Target Column Name: Description:

☐ Require that this column contains information Display format: ☒ Display term label in the field
☐ Enforce unique values ☐ Display the entire path to the term in the field
☒ Add to all content types ☐ Allow multiple values
☒ Add to default view ☐ Allow 'Fill-in' choices

Select a managed term set: Select term (Default value):

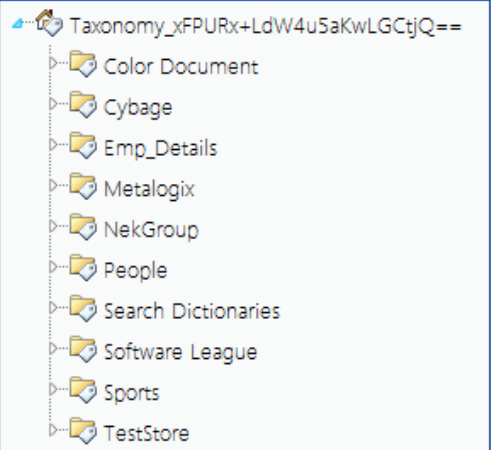

Taxonomy_xFPURx+LdW4u5aKwLGctjQ==

- Color Document
- Cybage
- Emp_Details
- Metalogix
- NekGroup
- People
- Search Dictionaries
- Software League
- Sports
- TestStore

Target Column Options

If source value does not match term: ☒ Leave target column as is
☐ Use Blank in target column
☐ Use Default value (term) in target column

3 Use the information in the following table to determine the appropriate action to take.

If the scope of your selection ...	Then ...
<ul style="list-style-type: none"> is at the site level or above and/or includes more than one list 	go to the next step.

	NOTE: Before you can select a list column, you must first choose from available Content Types.
consists of only one list	<p>you may go to Step 7.</p> <p>NOTE: It is not necessary to choose a Content Type for a single list. The Column drop-down will automatically populate with all of the columns used by that list.</p>

- 4 If you want to filter source column content types by a specific text string, complete the **Content Type Contains** field.

- 5 To populate the Content Type drop-down with relevant content types, click **[Get Content Types]**.
- 6 Select a source column **Content Type** from the drop-down.

NOTE: If you have selected objects above the list level (for example, Web applications, site collections, and/or sites), the drop-down will be populated with all Content Types that are available for use by lists and libraries within the scope of your selection. If you have selected multiple lists, only Content Types that are currently *in use* by those lists will be available for selection.

- 7 Select the **Source Column Name** of the column whose value you want to use in setting the Managed Metadata field. (This drop-down is populated with all of the *text* columns within the scope of your selection that match the selected Content Type.)

Source Column Name: Office

Update source column to:

Select a Target Managed

Target Column Name: M

☐ Require that this column

☐ Enforce unique values

☒ Add to all content types

☒ Add to default view

NOTE: If your selection includes more than one list, custom columns will only appear in the drop-down if they have been added to the Content Type at the site level. If a column was added directly to a particular list (or to a Content Type on the list), it will appear in the drop-down if your selection consists of *only* that list.

- 8 If you want to give the source column a new name, complete the **Rename source column to** field. (If you want to use the same name for the target column, then you must rename the source column.)

Update source column to: Obsolete

- 9 Complete the **Select a Target Managed Metadata section** as follows:

a) For **Target Column Name** and **Description**:

- If the Managed Metadata column already exists for the Content Type, select it from the drop-down.

NOTE: When you select an existing Managed Metadata column, the remaining fields will be grayed-out, and the existing column definition will be used.

OR

- If you want to create a Managed Metadata column for the Content Type, enter a name for the new column in the drop-down then enter a **Description**.

Select a Target Managed Metadata Column

Target Column Name: Metalogix Office

NOTE: If you are creating a new Managed Metadata column, complete the remaining fields as you would if you were creating it in SharePoint.

10 Check the options that you want to apply to the target column.

<input type="checkbox"/> Require that this column contains information	Display format: <input checked="" type="radio"/> Display term label in the field
<input type="checkbox"/> Enforce unique values	<input type="radio"/> Display the entire path to the term in the field
<input checked="" type="checkbox"/> Add to all content types	<input type="checkbox"/> Allow multiple values
<input checked="" type="checkbox"/> Add to default view	<input type="checkbox"/> Allow 'Fill-in' choices

11 Complete the **Target Column Options** section as follows:

- a) For **If source value does not match term**, specify how to proceed if a source value does not match a valid term within the selected term set. Use the information in the following table for guidance.

Target Column Options	
If source value does not match term: <input checked="" type="radio"/> Leave target column as is	
<input type="radio"/> Use Blank in target column	
<input type="radio"/> Use Default value (term) in target column	
<input type="checkbox"/> Overwrite existing values	<input type="checkbox"/> Append to existing values

If the source value does not match a valid term within the selected term set and ...	Then ...
you want to retain the existing value in the target Managed Metadata column	select Leave target column as is . NOTE: If you are creating a new target Managed Metadata column and select this option, when a non-matching value is encountered the target column value will be left blank.
you want the value in the target column to be blank (and blank is a valid value per the column definition)	select Use Blank in target column .
you want the default value that has been specified for the target Managed Metadata column to be used	select Use Default value (term) in target column .

- b) If the target Managed Metadata column already exists and you want to **Overwrite existing values**, check this box.

NOTE: If you leave this box unchecked and a value already exists in that column for an item, the existing value will be retained. If you selected a Managed Metadata column that allows multiple values, you also have the option to **Append to existing values**.

Now you can:

- run a simulation of the action (by clicking **[Run Simulation]**)

OR

- run the action immediately (by clicking [**Run Now**]),

OR

- [schedule the action to run at a later time](#)

OR

- [create an xml file with instructions for the analysis that can be run at a later time](#) (by clicking [**Save Instructions**]).

If you click [**Run Simulation**], ControlPoint runs through the process without actually making changes. A Task Audit will be generated with a description of what ControlPoint *would have done* if the action had been carried out. Text in the task description identifies it as a simulation.

If you chose the Run Now, option, after the action has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the action and displays in the Results section.

If you schedule the action, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Moving a Site Collection to Another Content Database

The Move Site Collection to Another Content Database action enables you to move a site collection to a different content database within the same Web application while preserving the site collection's url.

You can use this action in conjunction with the [Content Database Storage analysis](#) to help you effectively monitor and manage content storage among databases.

Once a site collection is deleted from the source content database, any activity and audit log data associated with it remains but becomes "orphaned." If ControlPoint audit log archiving has been set up for the farm, audit log data can be archived—and purged from the database—before the site collection is deleted. See [Archiving Audit Log Data Before Moving or Deleting a Site Collection](#). The site collection in the source content database will display as a deleted site collection in Site Collection Activity results only if it was active during the period covered by the analysis.


To move a site collection to another content database:

- 1 From the SharePoint Hierarchy, [select the site collection that you want to move to another content database](#).

(Note that you can only move one site collection at a time.)

- 2 Right-click and choose **Content > Move to Another Content DB**.

- 3 From the **Pick from Available Content Databases** drop-down, select the database to which you want to move the site collection.

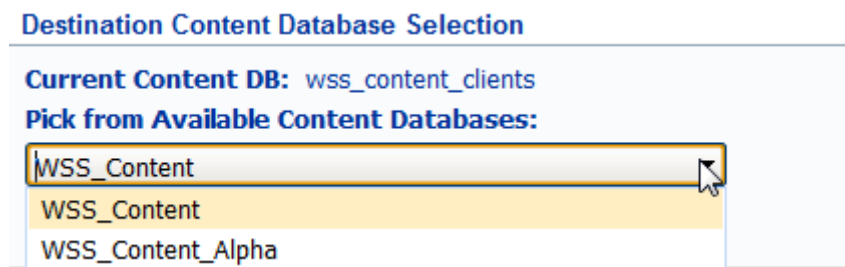

NOTE: The drop-down lists all other content databases associated with the Web application that are currently online and for which the Maximum Number of Sites has not been reached.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you choose to run the action immediately, an Action Verification dialog displays with a summary of the options you chose. Review these options, then click **[OK]** to continue.

When the process has completed, one of the following messages displays on the Action Verification dialog:

- **Process Completed -**
ControlPoint completed the operation without errors.
- **Process Completed with Some Errors -**
ControlPoint completed the operation, but with some errors; for example, an orphaned user was found in a group that was copied.

- **[error_message_text]**
An error occurred that prevented ControlPoint from completing the operation.

NOTE: If you chose to overwrite an object and an error occurs during the backup (export) of the destination site, ControlPoint will stop processing the operation regardless of the nature of the error, to prevent the destination site from being deleted before the problem can be corrected.

Click **[OK]** to generate a ControlPoint Task Audit, which provides detail about the progress of the operation, including any errors that have occurred.

If you schedule the action, a link to the Task Audit is included in the scheduled action notification email.

NOTE: Only one copy/move operation can run at a time. Any additional copy/move operations either submitted via the Run Now option or scheduled to run within the same timeframe will begin processing after the previous operation has completed.

See also [The ControlPoint Task Audit](#).

Deleting Sites

The ControlPoint Delete Sites action lets you delete one or more sites from your SharePoint farm. You also have the option of "backing up" the sites by exporting them to an external directory.

If you delete an entire site collection (by deleting its root site) from the source content database, any activity and audit log data associated with it remains but becomes "orphaned." If ControlPoint audit log archiving has been set up for the farm, audit log data can be archived—and purged from the database—before the site collection is deleted. See [Archiving Audit Log Data Before Moving or Deleting a Site Collection](#). The site collection in the source content database will display as a deleted site collection in Site Collection Activity results only if it was active during the period covered by the analysis. A deleted site will continue to be included in activity and storage analysis results if it was active during the period covered by the analysis.

About Exporting Site(s) Before Deletion:

The ControlPoint Export Before Delete option uses the same options and export format as the stsadm command for exporting site collections and sites.

ControlPoint allows you to specify:

- whether to include security
- whether to compress content into a CAB file

ControlPoint uses the following stsadm default options:

- includes all versions (current, last, major, last major, and minor)
- exports all content (not just changes)

Instead of auto-generating file names using stsadm parameters, ControlPoint generates a file name that consists of:

site_name (first 25 characters) *site_guid* *time_stamp* (dd_mm_yy_mm_ss format)


NOTE: If you are planning to export the site(s) before deleting them, make sure the directory to which you want to export has been created and that you know the path to it.

To delete one or more sites from your SharePoint farm:

- 1 [Select the site\(s\) that you want to delete](#).

NOTE: If you want to delete a an entire site collection—and have permissions to do so— select the root site (which, by extension, includes all of its subsites).

2 Choose **Content > Delete Site**.

Delete Site > Select parameter(s) to act on 

☒ **Export Before Delete**

Include Security: All ▼

Content Compression Using CAB: ☒

Export Path: \\2013sharepoint\CS\temp

3 If you want to export the site(s) before deletion, complete the Parameters section as follows:

- a) Make sure the **Export Before Delete** box is checked. (If you do not want to export the site(s), uncheck this box and continue with Step 4.)

NOTE: If you choose to **Export Before Delete**, the delete action will not be carried out unless the export is successful.

- b) Specify whether you want to **Include Security** by selecting the appropriate option (**All** or **None**) from the drop-down.

NOTE: Security data includes time stamps, security information, and user data.

- c) If you do *not* want the entire site to be compressed into a CAB file (with a .cmp extension), uncheck the **Content Compression Using CAB** box.

- d) Enter the **Export Path** to the directory to which you want the content to be exported.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you chose the Run Now, option, after the action has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the action and displays in the Results section.

If you schedule the action, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Deleting Lists

The ControlPoint Delete Lists action lets you delete one or more sites from your SharePoint farm *in real time*. You can also choose to:

- "back up" lists by exporting them to an external directory

NOTE: For lists that have versioning enabled, you can also choose which version(s) of list items to export

- send deleted lists to the site collection's Recycle Bin or delete them permanently.

About Exporting Lists Before Deletion:

The ControlPoint Export Before Delete option uses the same options and export format as the stsadm command for exporting lists.

ControlPoint allows you to specify:

- whether to include security
- whether to compress content into a CAB file

ControlPoint uses the following stsadm default options:

- includes all versions (current, last, major, last major, and minor)
- exports all content (not just changes)

Instead of auto-generating file names using stsadm parameters, ControlPoint generates a file name that consists of:

site_name (first 25 characters) *site_guid* *time_stamp* (dd_mm_yy_mm_ss format)

NOTE: If you are planning to export the site(s) before deleting them, make sure the directory to which you want to export has been created and that you know the path to it.

To delete one or more lists from your SharePoint farm:

- 1 [Select the list\(s\) that you want to delete.](#)

2 Choose **Content > Delete List**.

Delete List > Select parameter(s) to act on 

[Next, select...](#)

Export Settings
<input checked="" type="checkbox"/> Export selected lists before delete
Export location: <input type="text" value="\\2013sharpoin\CS\Ter X"/>
Please note: Each list will be exported with the name of the list as the file name.
<input type="checkbox"/> Compress
Version: <input type="text" value="Please Select..."/>

Delete Settings
<input checked="" type="radio"/> Send to Recycle Bin
<input type="radio"/> Permanently delete
Please note: If Recycle Bin is selected, but not enabled in SharePoint the operation will not proceed.

3 If you want to export the list(s) before deletion, complete the section as follows:

- Make sure the **Export Before Delete** box is checked. (If you do not want to export the site(s), uncheck this box and continue with Step 4.)

NOTE: If you choose to **Export Before Delete**, the delete action will not be carried out unless the export is successful.

- If you want the entire site to be compressed into a CAB file (with a .cmp extension), check the **Content Compression Using CAB** box.
- Enter the **Export Path** to the directory to which you want the lists to be exported.
- Select the version(s) that you want to export:
 - Last Major**
 - Current Version**
 - Last Major and its Minor**
 - All Versions**

4 For **Delete Settings**, specify whether you want to **Send to recycle bin** or **Permanently delete**.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you chose the Run Now, option, after the action has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the action and displays in the Results section.

If you schedule the action, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Archiving Audit Log Data Before Moving or Deleting a Site Collection

Any audit log data associated with a site collection remains in the content database but becomes “orphaned” when one of the following operations is performed:

- move site collection to a different content database
- delete site collection.

If ControlPoint audit log archiving has been set up for the farm, you can archive the site collection's audit log data—and purge it from the source content database—before performing one of the actions listed above.

NOTE: For detailed information on setting up an audit log data archive, refer to the *ControlPoint Administration Guide*.

To archive a site collection's audit log data:

- 1 From the Manage ControlPoint tree, chose **ControlPoint Management > Audit Log Archive**.

Control-click to select multiple items from the left side. Right-click for additional options.

Available Items

☒ Expand Scope

Name:

URL:

- 2013SharePoint
 - Clients (7)
 - ControlPoint (1)
 - Customers - 44847 (2)
 - Extranet (2)
 - Intranet (4)
 - New Content DB
 - Portal (1)
 - SharePoint - 80 (16)

Select & Drag

Add >

< Remove

Select & Drag

Apply

Cancel

Check check-boxes to include all children of the item.

Selected Items

Clear All

SELECTION

PARAMETERS

SCHEDULE

RESULTS

Run Now

Reset

Save As

- 2 [Select the site collection\(s\) whose audit log data you want to archive.](#)
- 3 Enter the **Number of Days to Keep in Audit Logs** (that is, any audit log data that has been captured before this time period will be archived). If you want to archive all audit log data before deleting or moving a site collection, enter 0.

Archive Audit Logs > Select parameter(s) to act on

Number of Days to Keep in Audit Log:

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Duplicating a Workflow Definition from one List or Site to Others


The **Duplicate a (List or Site) Workflow** action lets you copy a workflow that has been defined for one list or site to one or more other lists or sites.

NOTES:


- This action is only valid for workflows that have been defined within SharePoint or SharePoint Designer. Workflows created by other methods (for example, using Visual Studio Designer or third-party tools) cannot be copied using this action.
- This action is used to copy workflow definitions; not individual instances.
- The workflow whose definition will be duplicated must already be activated on the target site.

To copy a workflow definition:

- 1 Select the list (or site, if appropriate) that you want to copy the workflow definition from.
- 2 Choose **Change Management > Duplicate a Workflow Definition**.
- 3 From the **Available Items** list, select the objects to which you want the workflow duplicated and move them to the **Selected Items** list.
 - In the case of a site workflow, all of the child sites within the selection will be included.

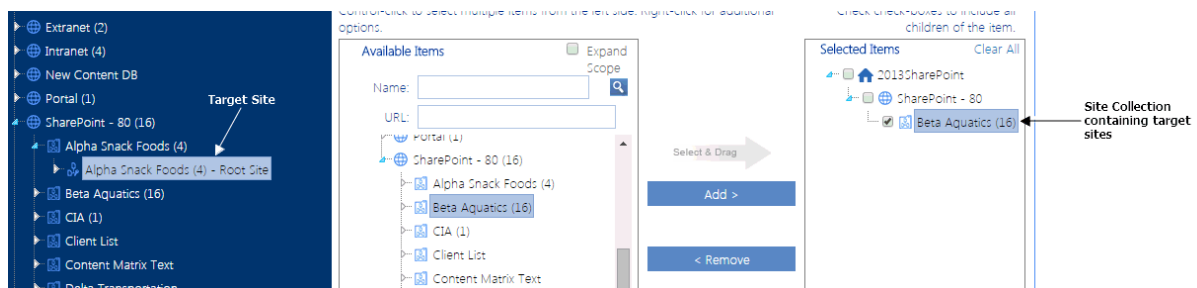


- In the case of a list workflow, you will have the opportunity to further define which lists within the selection will be included.

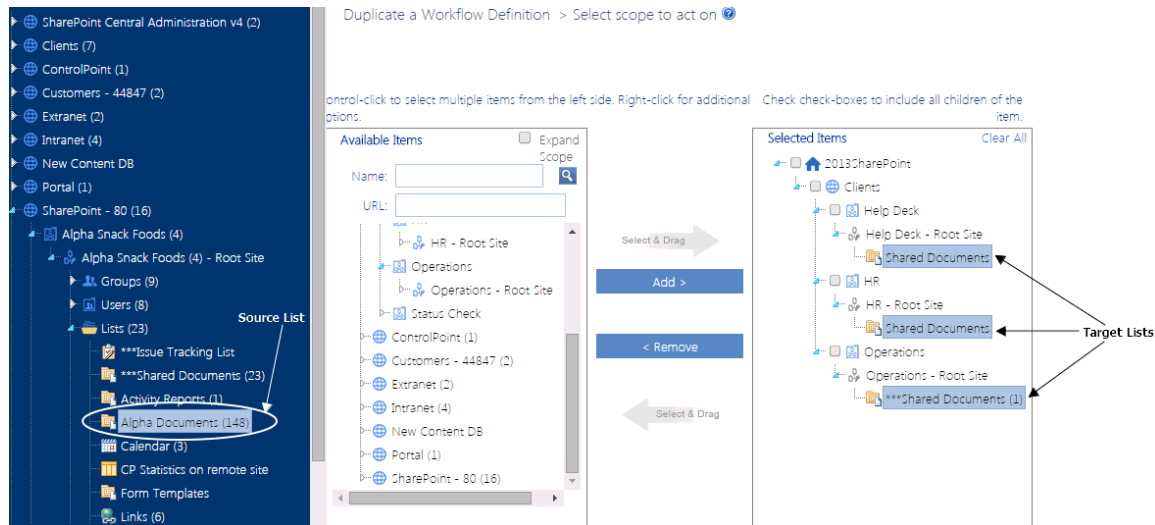

- 4 When you have finished selecting target objects, click **[Apply]**.
- 5 Select the Parameters tab then select the workflow that you want to duplicate from the drop-down.

Note that the drop-down displays only workflows that have been added to source object. If you want to examine workflow properties, click the **View Workflow Settings** link to open the SharePoint Workflow Settings page for the object.

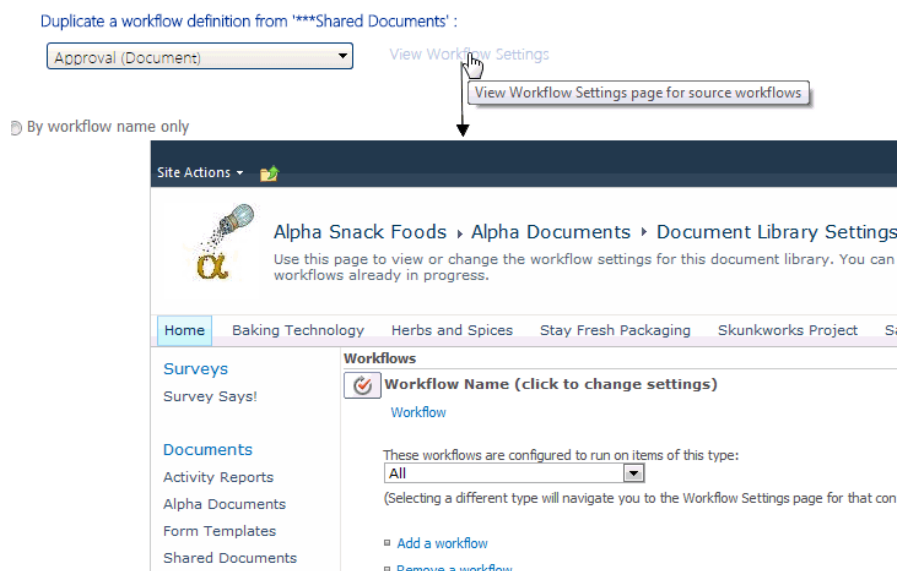

- 6 For list-level workflows only, you can choose to **Limit target selection by any of the following criteria**
 - For **Run on items with Content Type name**: you can choose to have the workflow added only to items within the list(s) of the specified content type.
NOTE: You can only specify a single content type using its *full* name.
 - If the scope of your target selection includes more than one list, you can limit to lists:

- whose **List name contains** a specified text string
- One or more **List type(s)**

Limit target selection by any of the following criteria:

Run on items with Content Type name:

List name contains:

Use Only List type:

When a combination of selection options is used, all lists specified through *any* of these criteria (though not necessarily *all* criteria) will be included in the operation.

EXCEPTION: The ControlPoint Application Administrator may choose to exclude all lists with a specific name from the target selection of *all* Duplicate Workflow operations, regardless of the scope. Details can be found in the *ControlPoint Administration Guide*.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Removing a Workflow from One or More Lists (or Sites)

The **Remove a Workflow** action lets you remove workflows from multiple lists or sites in a single operation. The operation "matches" a workflow selected as the "source," to workflows within your "target" selection. Workflows can be matched by name only, template only, or both.

TIP: You can generate a ControlPoint [Workflow Analysis](#).


NOTE: This action will delete both the workflow definitions *and* all instances (including running instances).

To remove a workflow:


- 1 Select the list (or site, if appropriate) containing the workflow you want to use as the "source" (that is, a workflow that "matches" the workflow(s) you want to remove from target lists or sites).
- 2 Choose **Change Management > Remove a Workflow**.
- 3 From the **Available Items** list, select the objects from which you want workflows removed and move them to the **Selected Items** list.

NOTE: The workflow will *not* be removed from the source object by default. If you also want to remove the workflow from the source object, you must also include it in your Target Selection.

- In the case of a site workflow, all of the child sites within the selection will be included.

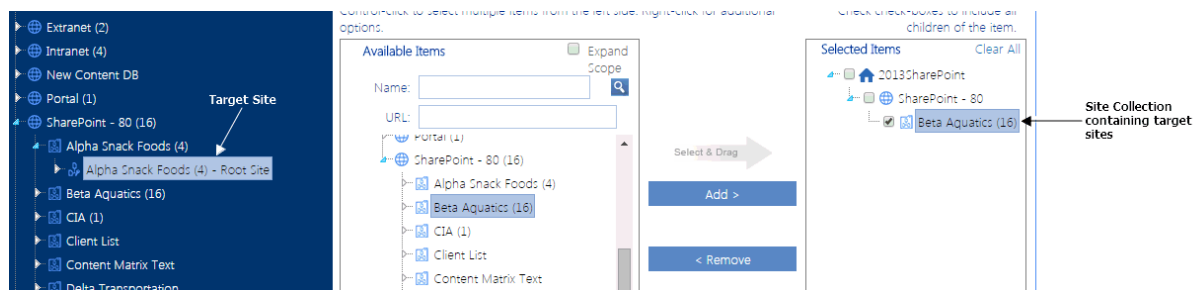

- In the case of a list workflow, you will have the opportunity to further define which lists within the selection will be included.

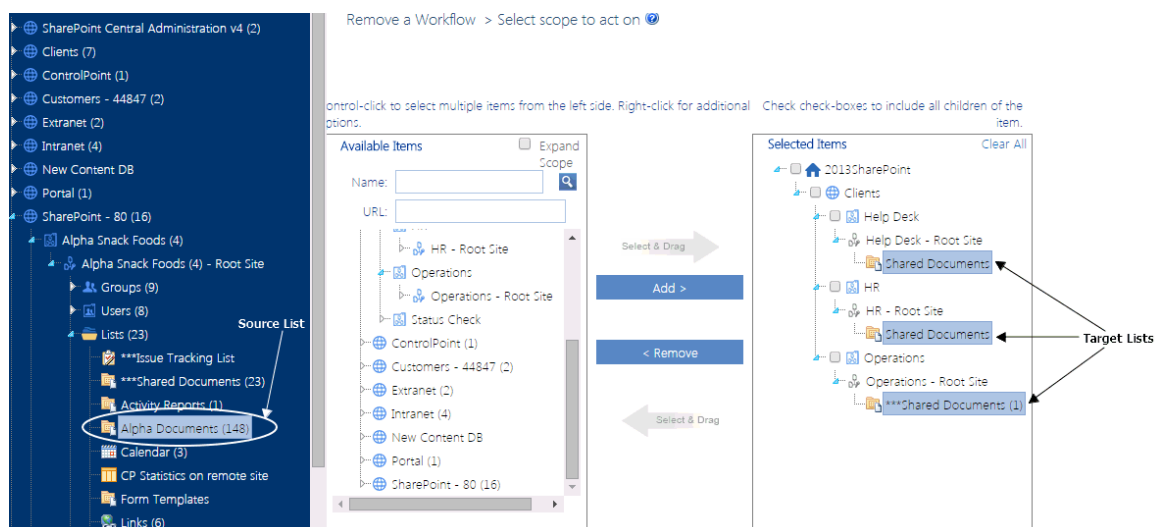

- 4 When you have finished selecting target objects, click **[Apply]**.

- 5 Select the Parameters tab then select the workflow that you want to remove from the Target Selection from the drop-down.

Remove a Workflow > Select parameter(s) to act on ?

Select the workflow from ('Alpha Documents') that matches the workflow(s) you

Workflow View Workflow Settings
Workflow template from site
Compliance Review (Document)

If you want to examine workflow properties, click the **View Workflow Settings** link to open the SharePoint Workflow Settings page for the object.

Remove a Workflow > Select parameter(s) to act on ?

Select the workflow from ('Alpha Documents') that matches the workflow(s) you want to remove from the Target Selection:

Workflow View Workflow Settings
☐ For reusable workflow, delete workflow template from site View Workflow Settings page for source workflows

Match by:

- ☒ By both wo
- ☐ By workflow
- ☐ By workflow

Site Actions

Alpha Snack Foods > Alpha Documents > Document Library Settings

Use this page to view or change the workflow settings for this document library. You can workflows already in progress.

Home Baking Technology Herbs and Spices Stay Fresh Packaging Skunkworks Project S

Surveys
Survey Says!

Documents
Activity Reports
Alpha Documents
Form Templates
Shared Documents

Workflows

☒ Workflow Name (click to change settings)
Workflow

These workflows are configured to run on items of this type:
All
(Selecting a different type will navigate you to the Workflow Settings page for that con

☐ Add a workflow
☐ Remove a workflow

- 6 For list-level workflows only, you can choose to **Limit target selection by any of the following criteria:**
 - For **Run on items with Content Type name:** you can choose to have the workflow removed only from items within the list(s) of the specified content type.
NOTE: You can only specify a single content type using its *full* name.
 - If the scope of your target selection includes more than one list, you can limit to lists:

- whose **List name contains** a specified text string
- One or more **List type(s)**

Limit target selection by any of the following criteria:

Run on items with Content Type name:

List name contains:

Use Only List type:

Announcements List

Contacts List

Data Connection Library

Discussion Board

Document Library

When a combination of selection options is used, all lists specified through *any* of these criteria (though not necessarily *all* criteria) will be included in the operation.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Note that the Task Audit will record the number of running instances of the workflow (if any) that were removed from an object.

Metalogix

Task Audit

7/15/2014

Parameters:

Start Date:7/15/2014

End Date:7/15/2014

Task Type:Remove a Workflow

Performed By:<ALL>

Search Criteria:

Total Tasks: 2

Task Type	Performed By	Date
Remove a Workflow	bellum\administrator	7/15/2014 12:44 PM

operation: Remove a Workflow - Type: List Workflow; Workflow Source: Tasks; Workflow Name: Compliance Review;

Performed On	URL	Path
2013SharePoint		

Removed workflow Compliance Review from list "Tasks" Running Instances: 2

Using ControlPoint Policies to Control Your SharePoint Environment

You can use ControlPoint Policies to prevent and/or send out a notification when an attempt is made to:

- delete a subsite
- exceed a quota imposed on a subsite
- delete documents/items
- create content
- upload a file that exceeds a specified size limit
- create a subsite
- create a subsite with a specific template
- create a subsite after a certain depth
- create or delete a list (optionally, with a specific template)
- upload files of one or more specific types
- add or delete a permission
- add, delete, or update a Permissions Level
- add, delete, or update a SharePoint group
- add or delete SharePoint group members
- break or restore permissions inheritance

You can configure your policy to

- include in the policy—or exclude from the policy—either:
 - all users
 - specific users and Active Directory groups
 - users in one or more SharePoint groups

OR

- exclude from the policy users with a specified Permissions Level.

If Sensitive Content Manager is installed in your environment, you are a member of the Compliance Administrators group, and the options are enabled, you can also create policies to scan content for sensitive content whenever an item or document is added to—or updated in—a SharePoint list or library.

IMPORTANT: If you have upgraded to version 2.0 or later of Metalogix Sensitive Content Manager from an earlier version and have existing policies to scan content, you may have to re-create or re-register these policies. Contact [Quest Support](#) for assistance.

In a multi-farm environment, you can create and manage ControlPoint policies for the home farm only.

Factors to Consider When Creating ControlPoint Policies

Policies that can be Created:

You can create ControlPoint policies to control:

- subsite creation
- creation of subsites with specific templates
- creation of subsites after a certain depth
- subsite deletion
- the creation and deletion of lists
- the enforcement of subsite-level quotas
- the deletion of documents/items (and optionally, attachments)
- content creation, using a custom Web service
- the uploading of files over a specified size
- the uploading of files of one or more specific types
- the adding or deleting of permissions
- the adding, deleting, or updating of Permissions Levels
- the adding, deleting, or updating SharePoint groups
- the adding or deleting of SharePoint group membership
- permissions inheritance breaking or restoring
- if Sensitive Content Manager is installed in your environment, you are a member of the Compliance Administrators group, and the options have been enabled, the submission of a document/item for sensitive content analysis whenever it is added to—and/or updated in—a list or library.

IMPORTANT: If you have upgraded from Sensitive Content Manager 1.9 and have existing policies to scan content, you may have to re-create or re-register these policies. Contact [Quest Support](#) for assistance.

Excluding Specific Users from All Policies

ControlPoint Application Administrators can exclude selected users—such as farm administrators—from *all* policies via the ControlPoint Configuration Setting Users to Exclude from All ControlPoint Policies (CPPOLICYSUPERUSERS). Refer to the *ControlPoint Administration Guide* for details.

NOTE: Users specified in this setting will always be excluded from all policies, even if they are explicitly added to a policy.

How Policies Impact Operations Performed in ControlPoint

Any action on a SharePoint site that is initiated through ControlPoint is actually *carried out* by the ControlPoint Service Account rather than the logged in user. Therefore, if the ControlPoint Service Account is included in a policy, the policy will be enforced for any ControlPoint action that is restricted by that policy (for example, Delete Site and Copy/Move Site--which involves site creation/deletion), regardless of the user who initiated it.

When "Include Children" Applies to Your Scope

Most policies created at the site collection level or above will include all child sites by default. If a policy is created for a site (other than the root site) or subsite, by default the policy will apply to the selected site and not its child sites. This behavior is consistent with the model for [Selecting Objects on Which to Perform a ControlPoint Operation](#).

EXCEPTION: Because the action applies specifically to the creation of child sites, **Control Subsite Creation in Certain Depth** will always include child sites, regardless of whether "Include Children" is explicitly checked in the Selection panel.

Including and Excluding Users and Active Directory Groups

You can either include or exclude users and/or Active Directory groups from a policy.

Creating Policies That Control Subsite Quota

Subsite-level quotas do not supersede the quota set for an entire site collection. That is, once a site collection quota is reached, no more content can be added.

NOTE: Because the contents of Recycle Bins are managed at the *site collection* level, they are not considered in a subsite-level quota.

Creating Policies That Affect Users Based on Permissions Level

You can only *exclude* (not include) a SharePoint permissions level from a policy.

Creating Policies Involving Site Templates

If you want to control the creation of sites that use one or more specific templates, you can choose from any template that has been deployed for the entire farm. The creation of a site using a certain template cannot literally be "prevented," since it is only upon successful creation of the site that ControlPoint can evaluate the template. The way ControlPoint enforces this type of policy is by deleting a site that is in violation immediately after it is created.

Creating Content Insertion Policies Using a Custom Web Service

You can create a policy to invoke a custom Web service whenever content in a SharePoint list or library is inserted or updated. For example, you may want documents and attachments to be scanned for sensitive content and have a notification sent when the policy is violated.

A content insertion policy can be created if:

- the Web service includes the logic necessary to integrate with ControlPoint and is accessible by ControlPoint Service account. (Details can be found in the guide *Running ControlPoint Actions Programmatically*.)

AND

- the ControlPoint Configuration Setting Content Creation Policy URL (POLICYSERVICEURL) is populated with the path to the Web Service asmx file. (Details can be found in the *ControlPoint Administration Guide*.)

NOTE: The ControlPoint policy cannot *prevent* content that violates a policy from being added.

Users Subject to Multiple Policies

If a user is restricted by more than one similar policy, all policies, including the most restrictive one, will be enforced.

EXCEPTION: If a policy is created at the list level, any similar policies at a higher scope will be ignored.

Updating or "Re-Registering" a Policy When a New Site Collection or Subsite is Added to the Scope

Whenever you add a Web application or site collection to the scope covered by a policy, you must "re-register" the policy so that the new site collection will be included. This assigns the new object to the SharePoint event handlers that watch for the actions covered by the policy. When a subsite is created the event handlers are automatically propagated to the new site.

See [Re-Registering a New Site Collection for a Policy](#).

Creating a ControlPoint Policy

Before creating a ControlPoint policy, it is recommended that you review [Factors to Consider When Creating ControlPoint Policies](#).

To create a ControlPoint policy:

- 1 [Select the object\(s\) for which you want to create the policy.](#)
- 2 Choose **Automation > Create a ControlPoint Policy**.

Create ControlPoint Policy > Select parameter(s) to act on ⓘ

Policy

Policy Rules <Select>

Policy Name

Policy Description

☒ Active

☒ Prevent

☐ Notify

User Selection

Select Users for Policy

☒ Restrict All

☐ Users/AD Groups

☐ Permission Levels



☐ SharePoint Group Picker





☒ Apply policy to selected users





☐ Exclude selected users

- 3 Complete the **Policy** section as follows:

a) Select one of the **Policy Rules**. Use the information in the following table for guidance.

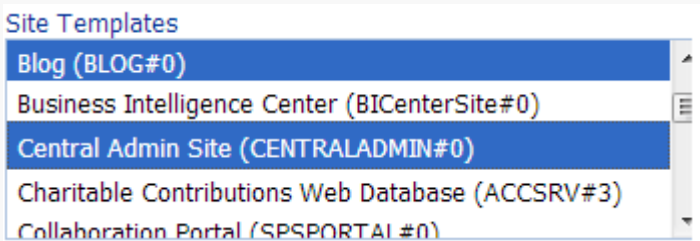If you want to ...	Then ...
control the creation of all new sites	select Control Subsite Creation .
control the creation of sites based on one or more specific templates	<p>Select Control Subsite Creation in Selected Template. Highlight each of the Site Templates you want to include in the policy.</p>  <p>REMINDER: The Site Templates list contains all of the templates that have been deployed for the entire farm, and ControlPoint can only "prevent" a policy violation by deleting the site soon after it is created.</p>
control the creation of sites beyond a certain depth	<ul style="list-style-type: none"> Select Control Subsite Creation in Certain Depth. Enter the maximum Site Depth you want the policy to allow. 

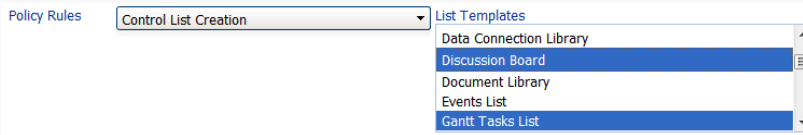If you want to ...	Then ...
control the deletion of a site	select Control Subsite Deletion .
control a subsite-level quota*	<ul style="list-style-type: none"> Select Control Subsite Quota. Enter the quota (in MB) that you want to set.  <p>REMINDER: Subsite-level quotas do not supersede the quota set for an entire site collection. That is, once a site collection quota is reached, no more content can be added.</p>
control the deletion of documents and list items*	<ul style="list-style-type: none"> Select Control Document/Item Deletion.  <ul style="list-style-type: none"> If you want to allow attachments to be deleted from list items, check the Allow Attachments to be Deleted box. <p>NOTE: If you leave this box unchecked, users subject to the policy are prevented from both the item itself <i>and</i> any attachments to items.</p>
control the creation of content based on a rule defined for your organization	<p>Select Control Content Creation (Custom).</p>  <p>REMINDER: You can only <i>notify</i> but not <i>prevent</i> content in violation of the policy from being created for a policy that uses this rule to be created, the ControlPoint Configuration Setting Content Creation Policy URL (POLICYSERVICEURL) must contain the service url for the rule. Details can be found in the <i>ControlPoint Administration Guide</i>.</p>
control the creation of a list	<ul style="list-style-type: none"> Select Control List Creation. If you want to limit the policy to certain <i>types</i> of lists, highlight on or more List Templates. 
control the deletion of a list	<ul style="list-style-type: none"> Select Control List Deletion. If you want to limit the policy to certain <i>types</i> of lists, highlight on or more List Templates.

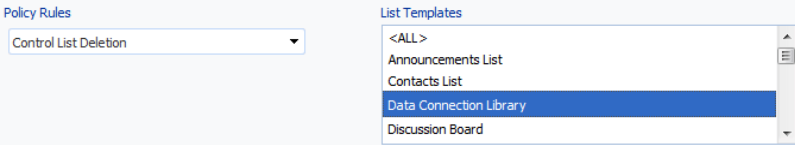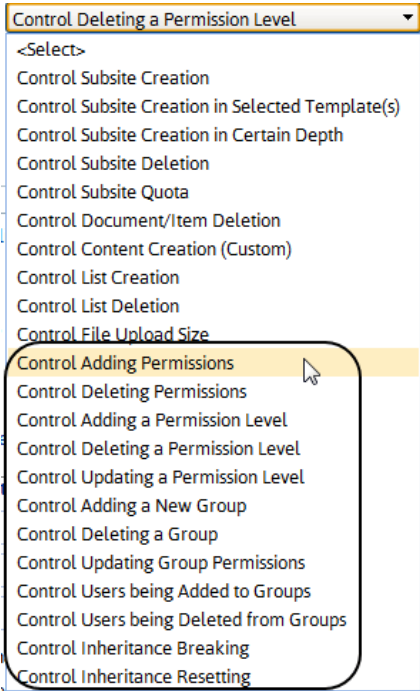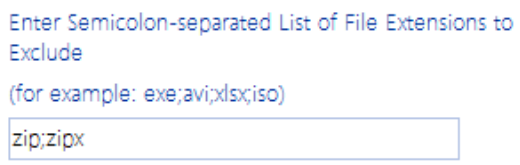If you want to ...	Then ...
	
control the uploading of any file that exceed a specified size	<ul style="list-style-type: none"> • Select Control File Upload Size. • Enter an Upload Size Limit (in megabytes). 
control the changing of: <ul style="list-style-type: none"> • Permissions OR <ul style="list-style-type: none"> • Permissions Levels OR <ul style="list-style-type: none"> • SharePoint group permissions or group membership OR <ul style="list-style-type: none"> • Permissions inheritance 	Select the applicable option from the drop-down: 
control the uploading of files of a particular type	<ul style="list-style-type: none"> • Select Control File Upload by Type. • Enter one or more file type extension(s). (Enter multiple extensions as a semicolon-separated list.) 
<i>If Sensitive Content Manager is installed in your environment, you are a member of the Compliance Administrators group, and the options are enabled</i>	
<ul style="list-style-type: none"> • submit a new document/item for scanning 	A. Select Scan item for sensitive data when content is added. B. Select a Profile for the scan from the drop-down.

If you want to ...	Then ...
<p>whenever it is added to a list or library</p> <p>AND</p> <ul style="list-style-type: none"> have ControlPoint automatically apply a Compliance Action based on the results of the scan. 	<p>NOTE: Checked out files are not scanned. You can run a Checked Out Documents analysis to identify these files. (When a file is uploaded and checked in for the first time, it will be scanned as part of a Scan item for sensitive data when content is updated or saved policy.)</p> <p>See also Using Sensitive Content Manager to Analyze SharePoint Content for Compliance.</p>
<ul style="list-style-type: none"> submit a document/item for scanning whenever it is updated or saved in a list or library <p>AND</p> <ul style="list-style-type: none"> have ControlPoint automatically apply a Compliance Action based on the results of the scan. 	<p>A. Select Scan item for sensitive data when content is updated or saved.</p> <p>B. Select a Profile for the scan from the drop-down.</p> <p>NOTE: Checked out files are not scanned. You can run a Checked Out Documents analysis to identify these files. (When a file is uploaded and checked in for the first time, it will be scanned as part of this policy.)</p> <p>See also Using Sensitive Content Manager to Analyze SharePoint Content for Compliance.</p>

*If you are creating a policy to control subsite quota, content creation, or document/item deletion, ControlPoint must process every event that the policy covers. Therefore, if the scope of the policy is exceptionally large (for example, it covers an entire farm with hundreds of sites, lists, and libraries) or the policy includes sites with a high volume of activity, performance of both ControlPoint and SharePoint may be impacted.




- b) Enter a **Policy Name** and **Policy Description**.
- c) Select either or both of the options described in the following table.


If you want to ...	Then ...
prevent users from violating the policy	<p>leave the Prevent box checked.</p> <p>If you uncheck this box, the Notify box must be checked, which means that users will be able to carry out the controlled action, but a notification will be sent to the violator and/or user(s) of your choice.</p> <p>NOTE: The Prevent option is not available for Control Content Creation.</p>

If you want to ...	Then ...
have an email notification sent to one or more specified users (and optionally, the violator of the policy)	check the Notify box.

4 Complete the **User Selection** section as described in the following table.


REMINDER: Any user that the ControlPoint Application Administrator has specified as a "super user" in the ControlPoint Configuration Setting Users to Exclude from All ControlPoint Policies (CPPOLICYSUPERUSER) will be excluded from the policy regardless of whether that user is *explicitly* included in the policy.

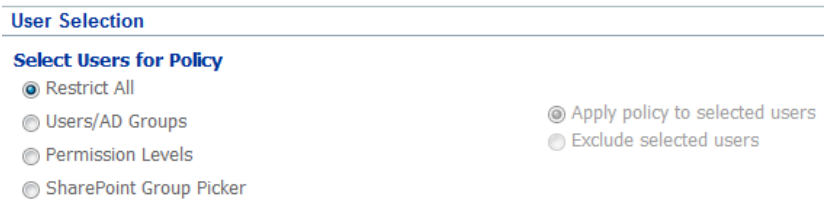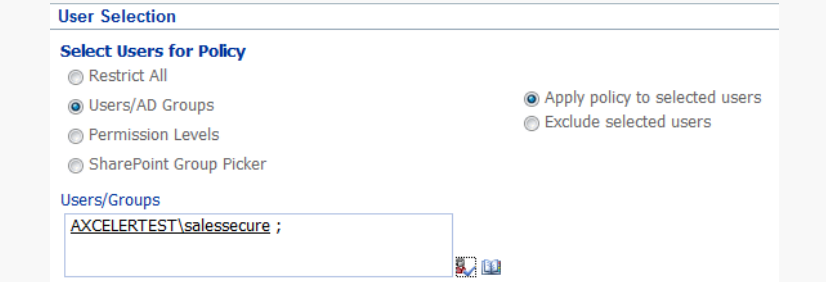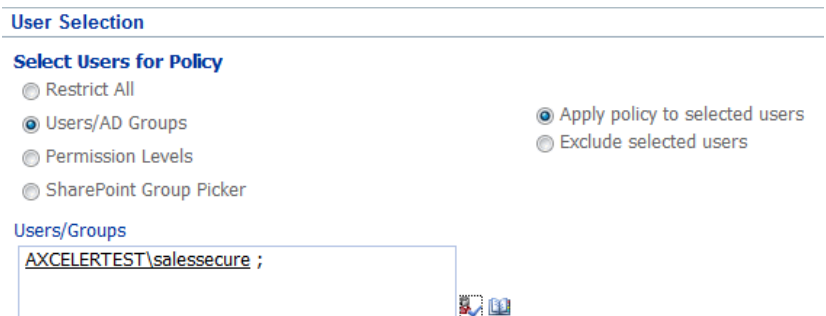If you want the policy to ...	Then ...
include all SharePoint users	<p>select Restrict All.</p> 
include or exclude one or more SharePoint users or Active Directory groups	<ul style="list-style-type: none"> Select Users/AD Groups. Select either Apply policy to selected users or Exclude selected users. Select the user(s) and/or AD group(s) you want to include in or exclude from the policy. 
exclude a specific Permissions Level	<ul style="list-style-type: none"> one of the Permissions Levels from the drop-down. 

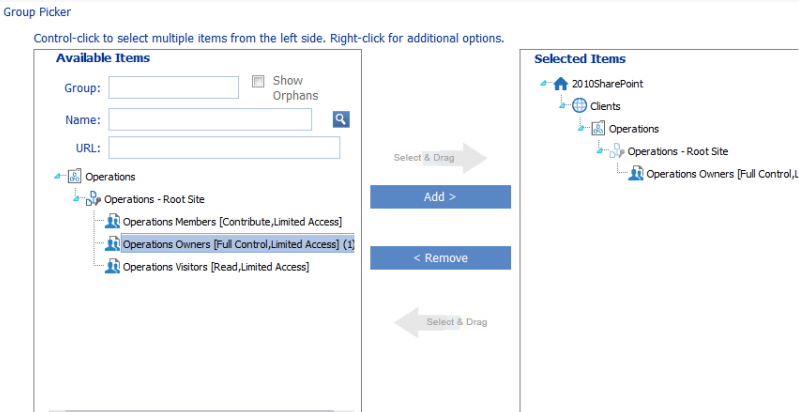If you want the policy to ...	Then ...
	<p>REMINDER: You cannot <i>include</i> a permissions level in a ControlPoint policy.</p>
include or exclude one or more SharePoint groups	<ul style="list-style-type: none"> • Select SharePoint Group Picker. • Select either Apply policy to selected users or Exclude selected users. • From the Group Picker, select the SharePoint group(s) that you want to include in or exclude from the policy. 

- 5 If you checked the **Notify** box, select the **Enforce Policy** tab and complete the **Distribution Details** as described in the following table.

If, when the policy is violated ...	Then ...
you want an email sent to one or more specified recipients	<ul style="list-style-type: none"> • In the Send To field, select the user(s) you want to notify of a policy violation. • Complete the Subject and Message fields.
you want a notification of the policy violation to be posted to a document library as a text file	<ul style="list-style-type: none"> • Complete the Subject and Message fields • Complete the Add to Library or List field as follows: <ul style="list-style-type: none"> ▪ Click [Select] to display the Destination Selection Page pop-up dialog, and select a document library from the Destination Farm Tree. (Note that only lists and libraries within the current farm for which you have Full Control access display). ▪ Select a library from the tree. (You can also enter a full or partial Name or URL to narrow your selection.)

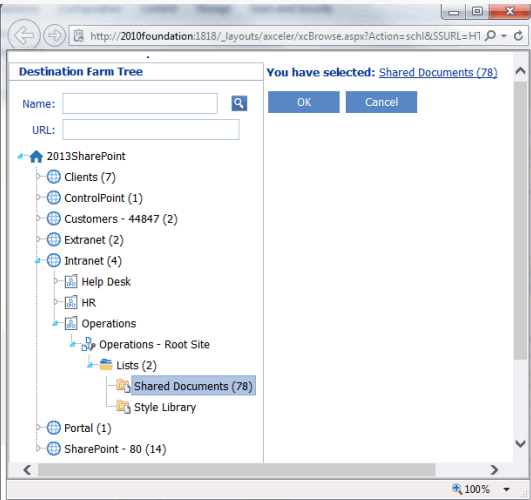If, when the policy is violated ...	Then ...
	 <ul style="list-style-type: none"> Click [OK] to dismiss the dialog and populate the field with the full url path to the selected library. <p>NOTE: The title of the text file includes the Policy Name along with a date and time stamp.</p>
you want any policy violators to receive an email notification	check the Send To Violator box.
you want any policy violator to receive a customized message	<ul style="list-style-type: none"> Check the Use Custom Message To Violator box. Complete the Subject and Message fields. <p>NOTE: If you leave this box unchecked, violators will receive the same email as any other specified recipient(s).</p>

6 Click **[Run Now]**.

After the action has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the action and displays in the Results section.

See also [The ControlPoint Task Audit](#).

Managing ControlPoint Policies

The Manage ControlPoint Policies action lets you view ControlPoint policies for a selected scope. You can:

- view/edit the details of a ControlPoint policy
- delete a policy, and

- re-register policies when a new Web application, site collection or subsite is added.

NOTE: If you are a Farm Administrator, you will be able to view all policies within the selected scope; otherwise, you will only be able to view policies that you have created.

To manage ControlPoint policies:

- 1 [Select the object\(s\) whose policies you want to manage](#)).
- 2 Choose **Automation > Manage Policies**.

Manage ControlPoint Policies > Select parameter(s) to act on ⓘ

Policy Name Contains: Policy Rule: Policy Owner:

☐ Show Active policies only

 ⓘ

Select	Edit	Policy Name	Active	Policy Description	Policy Rule	Login N
<input type="checkbox"/>		Do Not Let Development Group Create Subsites in SharePoint 80	✓		Control Subsite Creation	bellum\
<input type="checkbox"/>		Notify when a zip file is uploaded	✓		Control Document Upload by File Extension	bellum\
<input type="checkbox"/>		HR Scan	✓	Scan documents posted to HR	Scan item for sensitive data when content is added	bellum\
<input type="checkbox"/>		Prevent large uploads to Help Desk site	✓		Control Doc Upload Size Limit	bellum\
<input type="checkbox"/>		Prevent creation of new intranet sites	✓		Control Subsite Creation	bellum\

All of the policies that apply to the selected scope display, along with the following information:

- the **Policy Name** and **Policy Description**
 - an indication of whether the policy is **Active**
 - the **Owner** (creator) of the policy
 - the policy's **Created Date**
 - the user the policy was last **Updated By**.
- 3 If you want to narrow the list to include only policies that meet specific criteria:
 - a) Specify one or more of the following filters:
 - **Policy Name contains**
 - **Policy Rule**
 - **Policy Owner**

- **Show Active policies only**

Manage ControlPoint Policies > Select parameter(s) to act on ?

Policy Name Contains: Policy Rule: **<ALL>** Policy Owner:

Select All **Refresh Display** **Delete selected** **Re-register Selected Policies** **Re-register All Policies** ?

Select	Edit	Policy Name
<input type="checkbox"/>		Do Not Let Development Group Create C
<input type="checkbox"/>		Notify when a zip file is uploaded
<input type="checkbox"/>		HR Scan
<input type="checkbox"/>		Prevent large uploads to Help Desk site
<input type="checkbox"/>		Prevent creation of new intranet sites

<ALL>

Control Subsite Creation

Control Subsite Creation in Selected Template(s)

Control Subsite Creation in Certain Depth

Control Subsite Deletion

Control Subsite Quota

Control Document/Item Deletion

Control Content Creation (Custom)

Control List Creation

Control List Deletion

Control File Upload Size

Control File Upload Type

	Policy Rule	Login N
	Control Subsite Creation	bellum\
	Control Document Upload by File Extension	bellum\
ected to HR	Scan item for sensitive data when content is added	bellum\
	Control Doc Upload Size Limit	bellum\
	Control Subsite Creation	bellum\

b) Click [**Refresh Display**]

Now you can:

- [open a policy for viewing/editing](#)
- [re-register one or more policies](#)
- [delete one or more policies.](#)

Viewing/Editing a ControlPoint Policy

From the Manage ControlPoint Policies interface you can access a ControlPoint policy whose details you want to view or edit.

To access a ControlPoint policy's details:

From the Manage ControlPoint Policies table, click the policy's **Edit** icon ().

The Update ControlPoint Policy page opens in a separate browser window.

To edit the policy:

- 1 Modify the appropriate fields as you would for [Creating a ControlPoint Policy](#).

Update ControlPoint Policy > Select parameter(s) to act on

Policy

Policy Rules: Control Subsite Creation

Policy Name: Prevent creation of new intranet sites

Policy Description:

☒ Active

☒ Prevent

☐ Notify

User Selection

Select Users for Policy

☐ Restrict All

☒ Users/AD Groups

☐ Permission Levels

☐ SharePoint Group Picker

☐ Apply policy to selected users

☒ Exclude selected users

Users/Groups: BELLUM\hr

Update

Reset

- 2 To save changes click [Update].

Deleting ControlPoint Policies

From the Manage ControlPoint Policies page you can delete one or more ControlPoint policies.

NOTE: If you delete a policy, it will no longer be included in the [ControlPoint Policies Report](#). You can, alternatively, deactivate a policy—which would also give you the option of reactivating it at a later time—via the Update ControlPoint Policy page.

To delete one or more selected ControlPoint policies:

- 1 In the ControlPoint Policies table, check the Selected box for each policy you want to delete.
If you want to delete all policies, click **Select All**. (Note that, if the ControlPoint Policies table contains more than one page, policies on all pages will be selected).
- 2 Click [Delete selected policies].

Select All

Refresh Display

Delete selected policies

Show Active policies only

Re-register Selected Policies

Re-register All Policies

Select	Edit	Policy Name	Active	Policy Description	Policy Rule	Login Name
<input checked="" type="checkbox"/>		Do Not Let Development Group Create Subsites in SharePoint 80	<input checked="" type="checkbox"/>	Control Subsite Creation		bellum\ad

Re-Registering a New Site Collection for a Policy

Whenever you add a Web application or site collection to the scope covered by a policy, you must "re-register" the policy so that the new objects will be assigned to the SharePoint event handlers that watch for the actions covered by the policy.

You can either:

- re-register one or more policies in real time (for example, as soon as a new site collection or subsite is added)

OR

- schedule the re-registration of all policies to run either one time or on a regular basis (such as nightly) to ensure that new site collections/subsites will always be added to policies.

Manage ControlPoint Policies > Select parameter(s) to act on ⓘ

Policy Name Contains: Policy Rule: Policy Owner:

☐ Show Active policies only

 ⓘ

Select	Edit	Policy Name	Active	Policy Description	Policy Rule	Login N
<input type="checkbox"/>		Do Not Let Development Group Create Subsites in SharePoint 80	✓		Control Subsite Creation	bellum\
<input type="checkbox"/>		Notify when a zip file is uploaded	✓		Control Document Upload by File Extension	bellum\
<input type="checkbox"/>		HR Scan	✓	Scan documents posted to HR	Scan item for sensitive data when content is added	bellum\
<input type="checkbox"/>		Prevent large uploads to Help Desk site	✓		Control Doc Upload Size Limit	bellum\
<input type="checkbox"/>		Prevent creation of new intranet sites	✓		Control Subsite Creation	bellum\

To Re-register Selected Policies:

Use the information in the following table to determine the appropriate action to take.

If you want to re-register ...	Then ...
selected policies immediately*	<ul style="list-style-type: none"> Check the Select box each policy you want to re-register. Click [Re-register Selected Policies].
all policies immediately*	click [Re-register All Polices].
all policies on a one-time or recurring schedule	<ul style="list-style-type: none"> Open the Schedule Re-Register All panel. Schedule the re-registration to run at a later time and/or on a recurring basis.

If you want to re-register ...	Then ...
	<div data-bbox="579 297 869 324">Manage ControlPoint Policies ⓘ</div> <div data-bbox="608 398 804 425">General Job Information</div> <div data-bbox="692 445 1029 472">Job Name Re-register all ControlPoint Policies</div> <div data-bbox="1145 333 1235 356">SELECTION</div> <div data-bbox="1145 383 1252 405">PARAMETERS</div> <div data-bbox="1145 430 1358 454">SCHEDULE RE-REGISTER ALL</div> <div data-bbox="1145 481 1214 504">RESULTS</div>

***CAUTION:** Depending on the number and scope of the policies you are re-registering, the process may be time- and resource-intensive.

Managing SharePoint User Permissions

ControlPoint includes a variety of value-added actions that facilitate the management of SharePoint users, groups, and permissions:


These actions are accessible from various levels of the hierarchy, enabling you to act on a single site collection or site, multiple site collections, sites, and/or lists within a Web application, or across the entire farm.

EXCEPTION: You cannot use these actions to manage user permissions for the SharePoint Central Administration site.

From the ControlPoint left navigation pane, you can also link directly to SharePoint pages for managing users and permissions.

Accessing SharePoint Pages for Managing User Permissions

The Users folder displays all of the users with direct or explicit permissions for a selected site collection or site. You can link directly to the SharePoint pages for managing direct permissions of an existing user or create a new user.

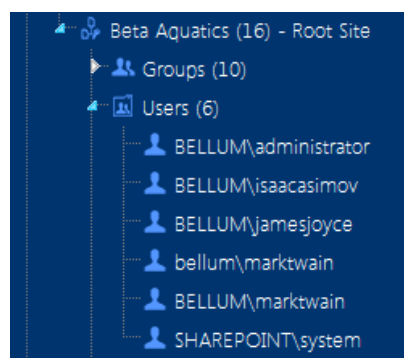


NOTE: Users do not display for sites whose permissions are *inherited* (as indicated by a  site icon).

If a user has permissions to the site collection/site via a group, permissions are managed at the group level. See [Accessing SharePoint Pages for Managing Groups](#).


To view user permissions for the site collection/site in SharePoint

Click on the Users folder to access the SharePoint Permissions page for the site collection/site

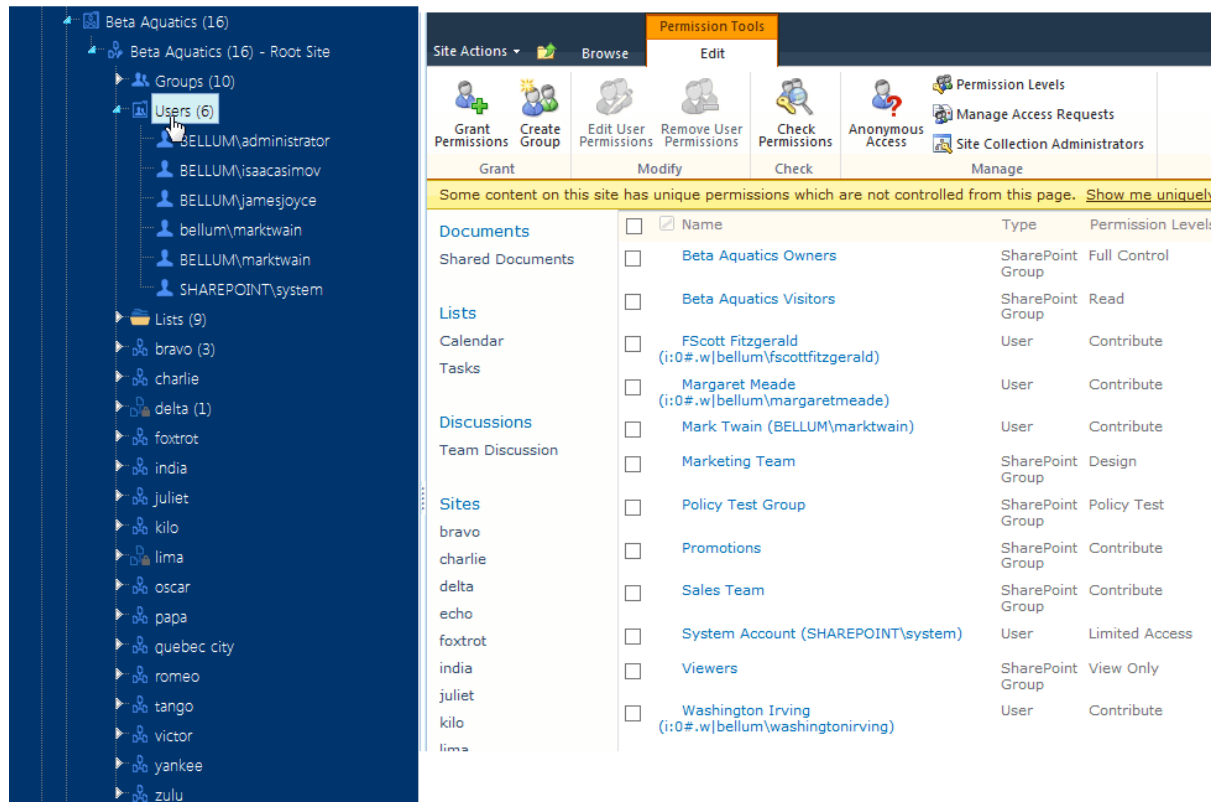

To view/edit information about a user in SharePoint:

Select a user name and choose **Edit** to access the SharePoint Edit Personal Settings page for that user.

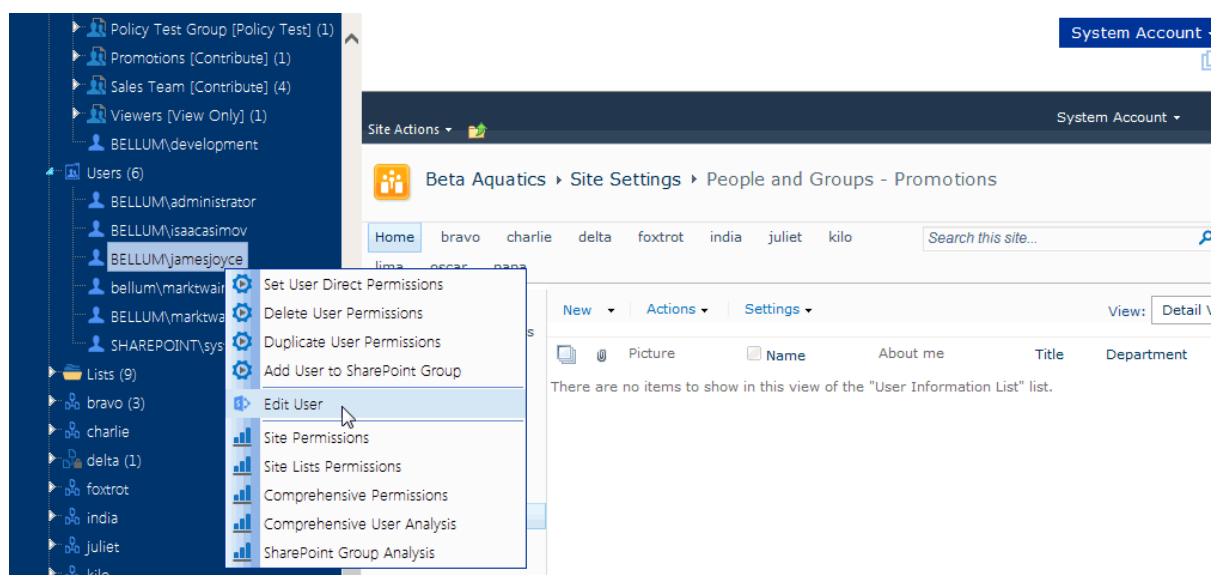


As an alternative to managing permissions through SharePoint, you can use ControlPoint value-added features for managing user permissions. These features are especially useful if you want act on multiple users and/or across multiple sites in a single operation.

Accessing SharePoint Pages for Managing Groups

The Groups folder displays all of the SharePoint and Active Directory groups with permissions for a site. You can link directly to the SharePoint pages for managing an existing group or create a new group.

All groups with permissions for each site within a site collection display beneath the site. In the case of SharePoint groups, the number of users within a group, as well as the group's permission level, displays to the right of each group name.

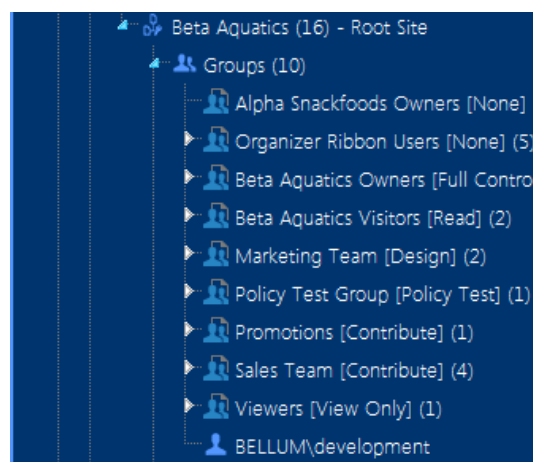


NOTE: Groups do not display for sites whose permissions are *inherited* (as indicated by the  icon).

You can view group membership by clicking on the plus sign (+) to the left of the group name.

To view/edit an existing group in SharePoint:


Click on a SharePoint group name to access the SharePoint People and Groups page for that group.

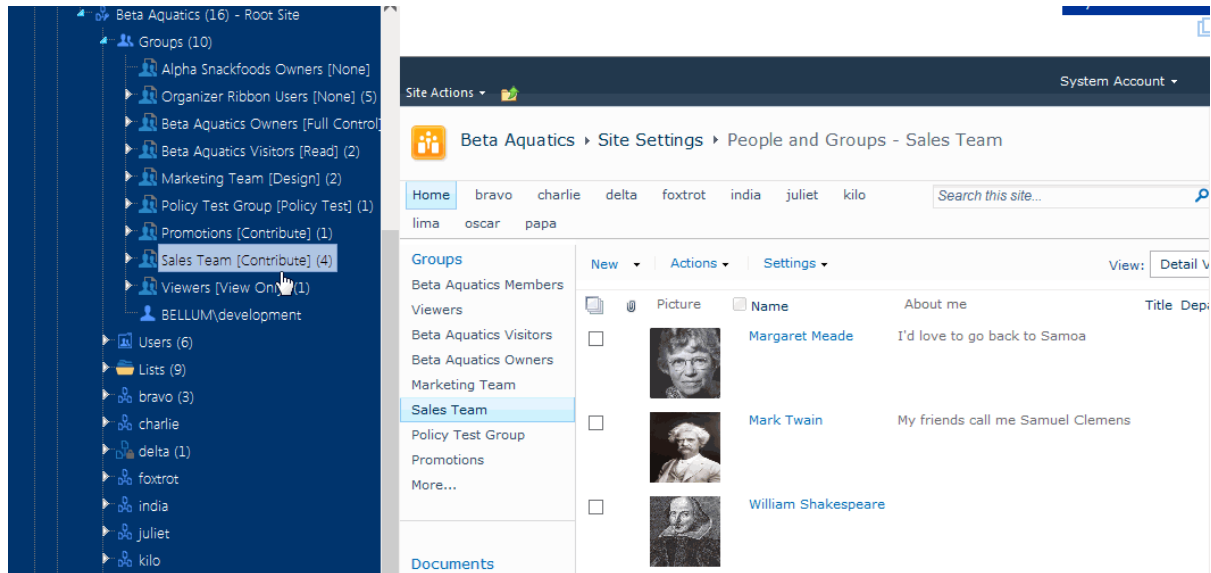

To view/edit groups in SharePoint:

Click the Groups folder to access the SharePoint All Groups page, from which you can create a new group for the site.

Consult your SharePoint documentation for instructions on creating a group.

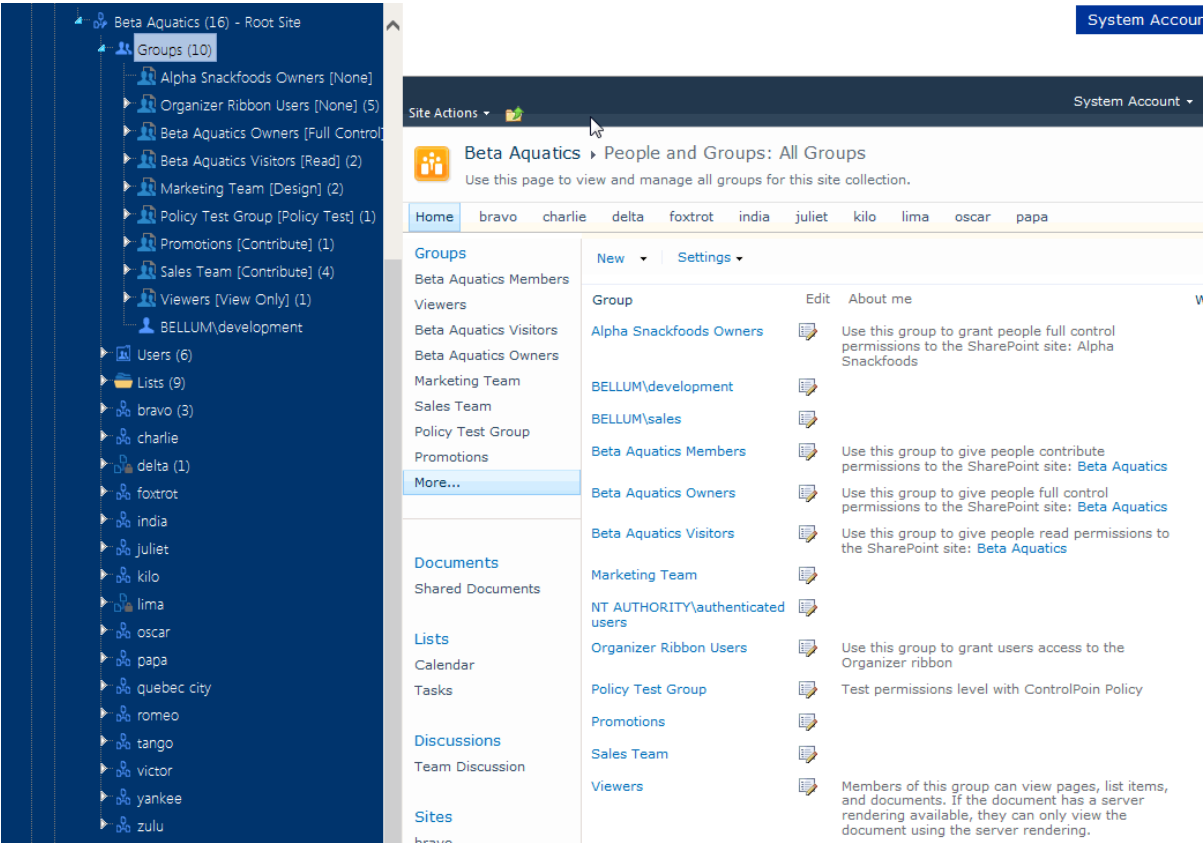

NOTE: If the Groups folder does not display for a root site or a site with unique permissions, no groups have been granted permissions for it. To set up permissions for the first Group, navigate to the People and Groups page through the SharePoint site. Once a group has been granted permissions, the Groups folder will display in the ControlPoint left navigation pane as soon as you [refresh the SharePoint Hierarchy](#).

Setting User Direct Permissions


Set User Direct Permissions is a ControlPoint action that lets you grant users direct permissions to one or more SharePoint sites, lists/libraries, and/or items. (The action will not, however, overwrite or replace any direct permissions a user may already have.)

NOTE: If you want to add users to an existing SharePoint group, use the procedure for [Adding Users to SharePoint Groups](#).

In a multi-farm environment, direct permissions can be set across multiple farms.

Setting Permission for Multiple Users Using a Wildcard

If a wildcard is used to select users, at the time you attempt to run, schedule, or save the operation a pop-up dialog will display, warning that you may be running the operation on a large number of Active Directory users and groups.

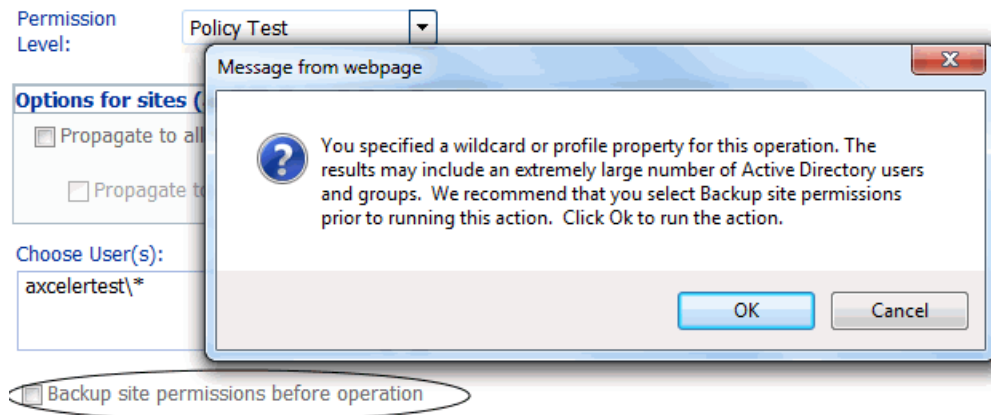


If you want to [back up all permissions for the selected site\(s\)](#) before running, saving, or scheduling the operation and have not already elected to do so, click **[Cancel]** to cancel the operation and check the **Backup site permissions before operation** box. To dismiss the dialog and run, schedule, or save the operation, click **[OK]**.

Because the action requires an Active Directory lookup, a full domain name must be specified in the People Picker (that is, a wildcard cannot be used in place of the domain name or any part of it). For example, axcelertest* is supported, but *\marktwain is not. It also means that alternate authentication methods (that is, other than Active Directory) are not supported.

To set user direct permissions:

- 1 [Select the object\(s\) to which you want to grant user permissions.](#)
- 2 Choose **Users and Security > Set User Direct Permissions**.
- 3 Complete the Parameters section as follows:
 - a) For **Set Permissions for User(s)**, [select the user\(s\) for whom you want to set direct permissions.](#)

- b) In the **Permission Level (Direct)** drop-down, select a level from the list.

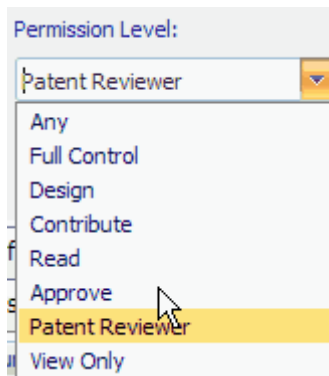

NOTE: All custom permissions levels that are currently assigned to at least one user within the scope of your selection display in the drop-down. (In a multi-farm environment, this list is populated from the permissions of the home farm.) If you want to assign a custom permissions level that has been defined for a site collection but either is not currently in use or exists only on a remote farm, you can type it into the drop-down.

- c) If your selection includes one or more sites and you want the permissions to be applied to all lists within the site(s) that have unique permissions, check the **Propagate to All Lists with Unique Permissions** box.
- d) If you have checked the **Propagate to All Lists with Unique Permissions** box and want the permissions to be applied to all *items* within the list(s) that have unique permissions, check the **Propagate to List Items** box.

NOTE: The "Propagate" options do not apply to lists that you selected explicitly. If you want to include items within explicitly-selected lists, use the **Include Children** or **Choose** option in the Selection panel. See also [Selecting List Items on Which to Perform a ControlPoint Operation](#).

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Deleting User Permissions


Delete User Permissions is a ControlPoint action that lets you delete SharePoint user permissions from one or more site collections/sites. You can also choose whether to:

- delete the user's entry from the selected site(s) (so that they no longer appear in the site's All People list)
- delete alerts associated with the user
- delete the user's My Site site collection, and/or
- reassign a user's permissions to one or more target users before performing the deletion

EXCEPTION: You cannot reassign Site Collection Administrator privileges using this action.

NOTE: This action does *not* remove users from any Web application policies, workflows that may be in effect, or Active Directory.

If a wildcard is used to select users, at the time you attempt to run, schedule, or save the operation a pop-up dialog will display, warning that you may be running the operation on a large number of Active Directory users and groups.

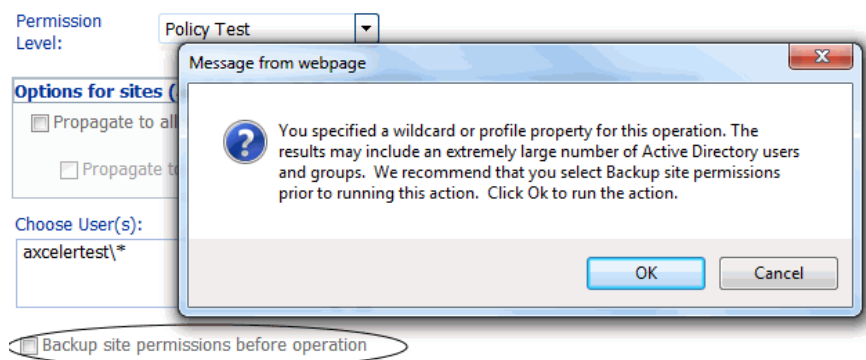

If you want to [back up all permissions for the selected site\(s\)](#) before running, saving, or scheduling the operation and have not already elected to do so, click **[Cancel]** to cancel the operation and check the **Backup site permissions before operation** box. To dismiss the dialog and run, schedule, or save the operation, click **[OK]**.

CAUTION: Deleting Users from SharePoint Groups

The Delete User Permissions action will remove the selected user(s) from SharePoint groups in which they are listed as a member. Because groups are defined at the site collection level and may be used anywhere in the site collection, if you are performing the action on one or more individual sites that includes groups that are used elsewhere in the site collection, the user(s) will lose permissions on unselected sites within the collection as well.

NOTE: This action does not remove users from *Active Directory* groups. Therefore, if a user is granted permissions via an Active Directory group, those permissions will not be impacted.

Deleting Permissions from Lists, Folders, or Items with Unique Permissions

When user permissions are added to a list, folder, or item that has unique permissions, SharePoint automatically creates an entry for the user on its first non-inherited parent object and assigns a permissions level of "Limited." This entry will be deleted only if that parent object is included in the scope of the action. If the parent object is not included in the scope, the following message will display in the Task Audit:

User [user_name] permissions cannot be removed from [object_type] [object_name]. Go to the first non-inheriting parent [object_type] to remove this permission.



To delete the permissions of one or more users:

- 1 [Select the object\(s\) from which you want to delete permissions.](#)
- 2 Choose **Users and Security > Delete User Permissions**.
- 3 For **Delete All Permissions for User(s)**, [select the user whose permissions you want to delete.](#)

NOTE: Delete User Permissions is one of the ControlPoint actions that can be performed on unvalidated users. (For example, you can delete the SharePoint permissions of a user that you know has been removed from Active Directory or alternate authentication provider database.) However, any individual user(s) entered into the Reassign Deleted Permissions to People Picker must be validated.

- 4 Specify the remaining parameters as appropriate. Use the information in the table below for guidance.

If you want to ...	Then ...
remove the user(s) from the site collection's People and Group list	<p>check the Delete User Entries from the Site Collection box. (If you leave this box unchecked, permissions will be deleted but user entries will remain in the People and Groups list).</p> <p>NOTES:</p> <ul style="list-style-type: none">• The action will not be carried out for explicitly-selected objects that have unique permissions, as removing a user from the People and Group list will, by extension, also delete any other permissions the user might have within that site collection.• If a user was granted permissions <i>only</i> through an Active Directory group, that user may have an "invisible entry" in the site collection's People and Group list. This action will remove that entry.• If the Delete direct permissions only is selected, this option becomes disabled. The removal of a user

If you want to ...	Then ...
	from the site collection would remove <i>all</i> of that user's permissions, including those granted through membership in SharePoint groups.
remove <i>only</i> direct permissions and retain permissions granted through SharePoint group membership	check the Delete direct permissions only (Leave group permissions intact) box. NOTE: If Delete User Entries from the Site Collection is selected , this option becomes disabled. Removal of a user from the site collection would remove <i>all</i> of that user's permissions, including those granted through membership in SharePoint groups.
reassign the permissions of the user(s) to be deleted to one or more other users	<p>a. Check the Reassign Deleted Permissions to box.</p> <p>b. Select the user(s) to whom you want to copy the permissions.</p> <p><input checked="" type="checkbox"/> Reassign Deleted Permissions to:</p> <p><u>James Joyce</u> ;  </p> <p>NOTE: If you entered the name of more than one user in the Delete Users field, the permissions of every one of those users (if different) will be reassigned to the target user.</p>
delete SharePoint alerts that have been set for the user(s)	check the Delete Alerts box.
delete the user My Site site collection(s)	check the Delete My Sites box.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

NOTE: If you chose to reassign permissions, the delete action will not be carried out unless the permissions are successfully reassigned.

Duplicating a User's Permissions

Duplicate User Permissions is a ControlPoint action that lets you copy the permissions of one SharePoint user to one or more others. Permissions can be copied for multiple site collections in a farm or Web application, or for individual site collections and sites.

EXCEPTIONS:


- You cannot duplicate *Site Collection Administrator* privileges using this action. You also cannot duplicate permissions that were granted via an Active Directory group (as an alternative, you can simply add the new user(s) to the Active Directory group).
- At a list-level scope, you cannot duplicate user permissions to a member of a SharePoint group.

All of a user's permissions for a site collection, including any unique permissions for sites, lists, and libraries, and items are copied. Any Web Application policy permissions are not copied, however.

NOTE: If your ultimate goal is to delete a user after copying his or her permissions to another user (for example, if the user is leaving the department or company and is being replaced by someone else), you can do so as part of the procedure for [Deleting User Permissions](#).

In a multi-farm environment, a user's permissions can be duplicated across multiple farms.

If a wildcard is used to select users, at the time you attempt to run, schedule, or save the operation a pop-up dialog will display, warning that you may be running the operation on a large number of Active Directory users and groups.

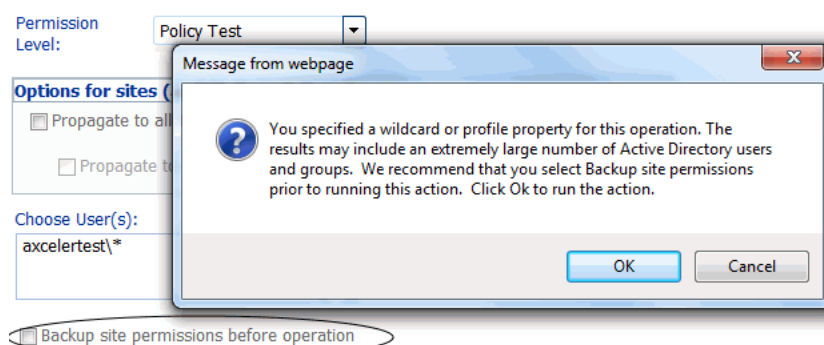

If you want to [back up all permissions for the selected site\(s\)](#) before running, saving, or scheduling the operation and have not already elected to do so, click **[Cancel]** to cancel the operation and check the

Backup site permissions before operation box. To dismiss the dialog and run, schedule, or save the operation, click [OK].

To duplicate a user's permissions:

- 1 [Select the site\(s\) for which you want to duplicate permissions.](#)
- 2 Choose **Users and Security > Duplicate User Permissions**.
- 3 Complete the Parameters section as follows:
 - a) For **Model User Name**, [select the user\(s\) whose permissions you want to duplicate](#).

NOTE: Make sure that the permissions of the user you want to use as the model are appropriate for the target user(s). Remember that you can review the permissions of the model before continuing. If you entered the name of more than model user, the permissions of every one of those users (if different) will be assigned to the target user(s).
 - b) For **Duplicate Permissions To**, select the target user(s).
 - c) If you want permissions of the model user(s) to *replace* those of the target user(s), check the **Delete existing permissions from target** box.

NOTE: If you leave this box unchecked, model user permissions will be *added* to any existing permissions.

Duplicate User Permissions > Select parameter(s) to act on 

Model User Name:

[View Permissions](#)
[View Comprehensive User Analysis](#)

☐ Backup site permissions before operation

Duplicate Permissions to:

☒ Delete existing permissions from target

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Duplicating a Permissions Level

The Duplicate Permissions Levels action lets you copy a SharePoint permissions level as it is defined for a selected site collection or site to one or more other site collections and/or sites. For target sites that inherit permissions levels, you can choose whether to copy the permissions level to the root site, skip any sites whose permissions level are inherited, or break inheritance and apply the permissions level from the source site. You can also choose whether or not to override a permissions level of the same name on a target site.

To duplicate a permissions level:

- 1 [Select the site collection or site whose permissions level you want to duplicate.](#)

NOTE: Unlike many other ControlPoint operations—which are initiated for *target* objects (that is, objects that you want to act *on*)—you initiate the Duplicate List Properties operation by selecting the *source* list (that is, the list you want to copy *from*).


- 2 Choose **Users and Security > Duplicate Permission Levels**.

- From the Selection panel, select the site collection(s) and/or sites to which you want to copy the permissions level, then click **[Apply]**.


Duplicate Permission Levels > Select scope to act on 


Next, define parameter(s) to act

Control-click to select multiple items from the left side. Right-click for additional options.

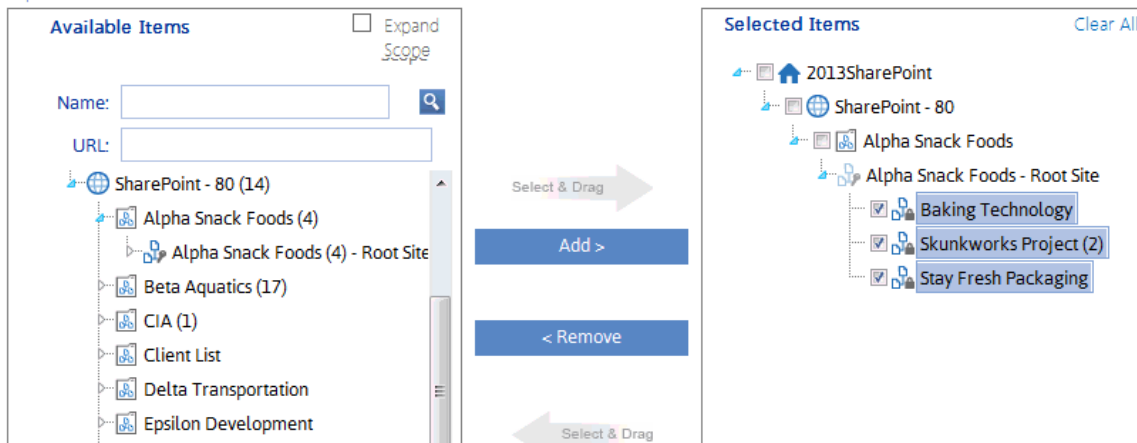

- From the **Select Permissions Level** drop-down, select the permissions level you want to duplicate.

Duplicate Permission Levels > Select parameter(s) to act on 

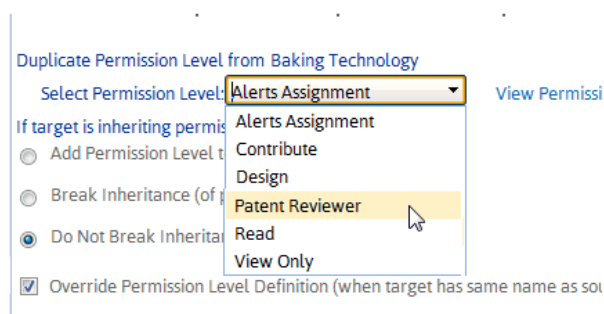

If you want to open the SharePoint Permissions Level Page, where you can view and edit permissions level for the source site, click the **View Permissions Levels** link.

- Use the information in the following table to determine the appropriate **If target is inheriting permissions levels:** selection.

If you want to ...	Select ...
add the permissions level to the root site of each site collection within the selected scope (and by extension, to all subsites that inherit from it)	Add Permission Level to Root Site.
break permissions level inheritance of all sites within the selected scope that have inherited permissions and add the permissions level to each of those sites	Break Inheritance (of permissions and levels).

If you want to ...	Select ...
skip the action for any sites that inherit permissions	Do Not Break Inheritance (Skip Action).

- 6 If you want to skip sites for which a permissions level with the same name already exists, uncheck the **Override Permissions Level Definition** box.

If you leave this box checked and ControlPoint encounters a permissions level with the same name, it will be overwritten with the permissions level definition from the source site.

TIP: If you leave the **Override Permission Level Definition** box checked, you may also want to schedule the action to run on a recurring basis to ensure that any changes to the permissions level definition on the source site will be applied to the target site(s).

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Cleaning Up User Permissions

The **Clean-up Permissions** action lets you analyze the permissions of individual users within site collections and identify SharePoint Groups and/or Active Directory groups with matching permissions.

If you have chosen to include SharePoint groups in the action, you then have the option of moving users with direct permissions into SharePoint groups with matching permissions in accordance with SharePoint best practices. (Because Active Directory groups are managed independent of SharePoint, you cannot use this action to add users to Active Directory groups.)

Before cleaning up permissions, it is recommended that you run a [User to Group Analysis](#) for more detailed information about a user's direct permissions and the permissions of comparable SharePoint groups.

NOTE: You can initiate a Clean-Up Permissions action from the site collection level of the SharePoint Hierarchy only. However, you can include multiple site collections in your selection.

To clean up user permissions:

- 1 [Select the site collection\(s\) for which you want to clean up permissions.](#)
- 2 Choose **Automation > Clean-up User Permissions**.

Clean-up User Permissions > Select parameter(s) to act on ?

Choose User(s):

[User to Group Analysis](#)

☒ Include Sharepoint Groups
 ☐ Include Active Directory Groups

Get Permissions

User and Group Permissions

- 3 [Select the user\(s\) whose permissions you want to clean up.](#)
- 4 If different from the default (**Include SharePoint Groups** only), check/uncheck the appropriate option(s) to **Include Active Directory Groups** only or both **Include SharePoint** and **Include Active Directory Groups**.

NOTE: At least one of these options must be checked.

- 5 Click **[Get Permissions]**.

NOTE: Retrieving permissions is a resource-intensive process. Depending on the scope and number of users you have selected, the operation may take a long time to complete. If you want to cancel the operation, click **[Cancel Get Permissions]**.

The following information is returned for each site collection and user within the scope of your analysis:

- the user's login name and the number of unique (non-inherited) **Direct Permissions** they currently have, and
- a list of SharePoint and/or Active Directory groups that are candidates for adding the user to—that is, they have the same permissions or fewer
- the number of **Matching Permissions** between the user and group.

Note that, if the user is already a member of a group with matching permissions, a check mark will display in the Group Member column.

User and Group Permissions

	Add to Group	Group	Direct Permissions*	Matching Permissions*	Selected Permissions	Group Member
Site Collection: Alpha Snack Foods						
User: axcelertest\williamshakespeare;			Direct Perms Left : 7*	User Perms with no matching groups : 1*		
<input type="checkbox"/>		Alpha Snack Foods Owners	3	3	0	<input checked="" type="checkbox"/>
<input type="checkbox"/>		Beta Aquatics Owners	5	5	0	
<input type="checkbox"/>		CIA Owners	1	1	0	
<input type="checkbox"/>		Client List Owners	1	1	0	
<input type="checkbox"/>		Marketing Team	4	4	0	

To replace a user's direct permissions with membership in a SharePoint group with comparable permissions:

Check the **Add to Group** box to the left of the SharePoint group to which you want to add the user.

NOTES:

- If the user is already a member of the selected group, the action will delete the direct permissions and retain his/her membership in that group. Otherwise, the action will add the user to the selected group and delete his/her direct permissions.
- If you chose to include Active Directory groups, the action identifies—but does not allow you to add to—matching groups. (If matching Active Directory groups are found, the Add to Group checkbox will be absent.)

Note that when you check an **Add to Group** box, the **Direct Perms Left** count is decreased by the number of matching permissions, and those permissions are added to the **Selected Permissions** column.

NOTE: If the number of direct permissions that a user has is greater than the number of permissions for the matching group, you may want to create a new SharePoint group for the remaining permissions after completing the cleanup operation. The [ControlPoint User to Group Analysis](#).

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).


Adding Users to SharePoint Groups

Add Users to SharePoint Groups is a ControlPoint action that enables you to add one or more users to existing SharePoint groups.

In a multi-farm environment, users can be added to SharePoint groups on a single farm; either the home farm or a remote farm.

Adding Multiple Users to SharePoint Groups Using a Wildcard

If a wildcard is used to select users, at the time you attempt to run, schedule, or save the operation a pop-up dialog will display, warning that you may be running the operation on a large number of Active Directory users and groups.

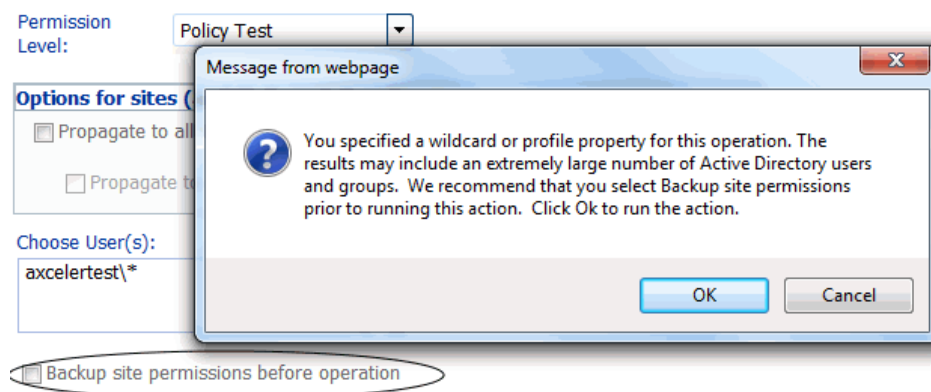


If you want to [back up all permissions for the selected site\(s\)](#) before running, saving, or scheduling the operation and have not already elected to do so, click **[Cancel]** to cancel the operation and check the **Backup site permissions before operation** box. To dismiss the dialog and run, schedule, or save the operation, click **[OK]**.

Because the action requires an Active Directory lookup, a full domain name must be specified in the People Picker (that is, a wildcard cannot be used in place of the domain name or any part of it). For example, axcelertest* is supported, but *\marktwain is not. It also means that alternate authentication methods (that is, other than Active Directory) are not supported.

To add users to SharePoint groups:

- 1 [Select the object\(s\) for which you want to add users to groups.](#)
- 2 Choose **Users and Security > Add User to SharePoint Group**.
- 3 Select the SharePoint group(s) to which you want to add users as follows:
 - a) From the **Available Items** list, select the group(s) to which you want users and move them to the **Selected Items** list.

Note that all groups defined for the entire site collection display beneath the root site. Groups with unique permissions also display beneath the site granting those permissions. By default, groups will display in this list if they have been assigned at least one permissions level. ControlPoint Application Administrators can, however, configure ControlPoint to display groups that do not have an associated permissions level. Details can be found in the *ControlPoint Administration Guide*.

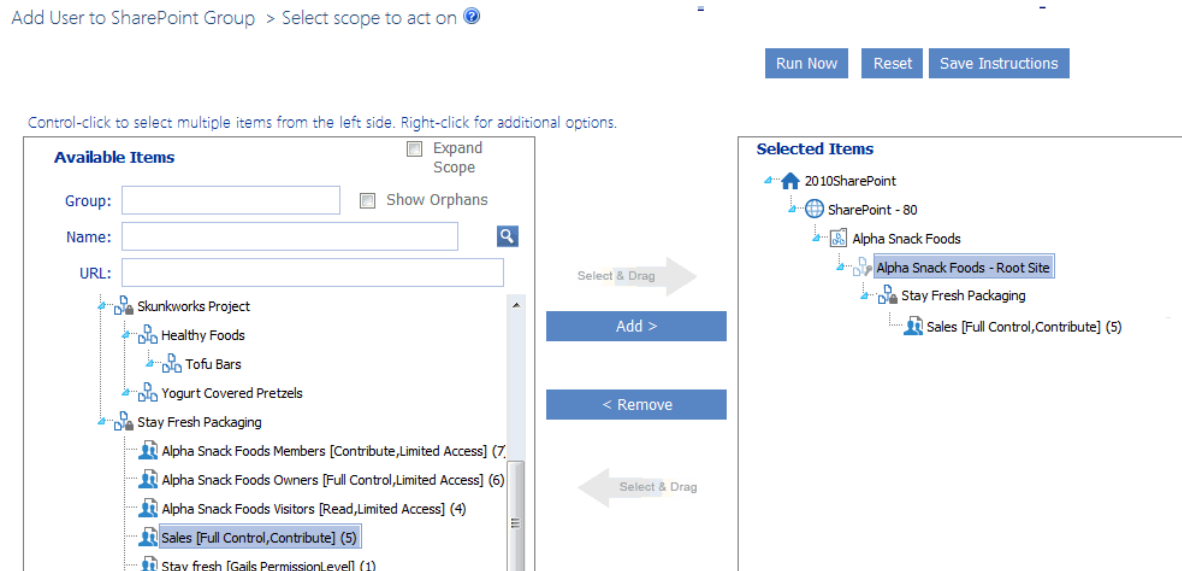

b) When you have finished adding groups to the Selected Items list, click **[Apply]**.

- 4 In the Parameters section **Choose User(s)** field, [select the user\(s\) that you want to add to the group\(s\)](#).



- 5 If you want to remove any user direct permissions from objects for which the selected *group* has permissions, check the **Remove matching direct permissions** box.



NOTE: Direct permissions for any objects within the scope of the action for which the selected SharePoint group does *not* have permissions will be retained.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)
- OR
- complete the Enforce Policy section and [schedule the operation to run at a later time](#).
- OR
- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Setting SharePoint Group Permissions

The Set SharePoint Group Permissions action lets you assign a permissions level to one or more SharePoint groups within a single site collection or site.

By default, only groups that have existing permissions within the site collection can be selected. In that case, the action *adds* to the existing permissions (it does not replace them). ControlPoint Application Administrators can, however, choose to display- and allow the selection of- groups that exist in the site collection but do not have permissions to the object. See the *ControlPoint Administration Guide* for details on changing the ControlPoint Setting "Show SharePoint Groups with No Permissions in Hierarchy."

In a multi-farm environment, SharePoint group permissions can be set on a single farm; either the home farm or a remote farm.

This feature is not available at the farm (tenant) scope.


To set SharePoint Group Permissions

- 1 [Select the site collection or site whose SharePoint group permissions you want to set.](#)
- 2 Choose **Users and Security > Set SharePoint Group Permissions**.

Select SharePoint Groups:

Control-click to select multiple items from the left side. Right-click for additional options.

Check check-boxes to include all children of the item.

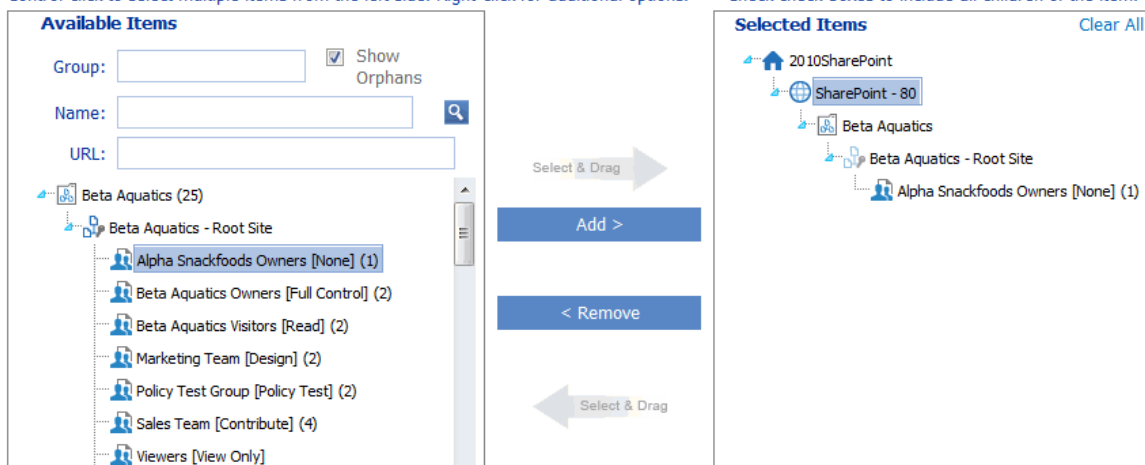

- 3 Select the group(s) to which you want to add permissions as follows:

- a) From the **Available Items** list, select the group(s) to which you want to set permissions and move them to the **Selected Items** list.

Note that all groups defined for the entire site collection that have at least one associated permissions level display beneath the root site. Groups with unique permissions also display beneath the site granting those permissions. Any group that does not have at least one associated permissions level for the site collection or site will not display in the list.


TIP: If your Available Items list is particularly long, you may find it useful to narrow the scope by searching based on **Group** name, site **Name**, and/or site **URL**) and searching for the group. For example, if you want to narrow your scope to all group owners, enter "owner" in the Group field.

- b) Click [**Apply**].

- 4 From the **Permission Level** drop-down, select the permissions level you want to add to the group.

REMINDER: This action will add to, but will not replace, an existing permissions level.

Select SharePoint Groups:

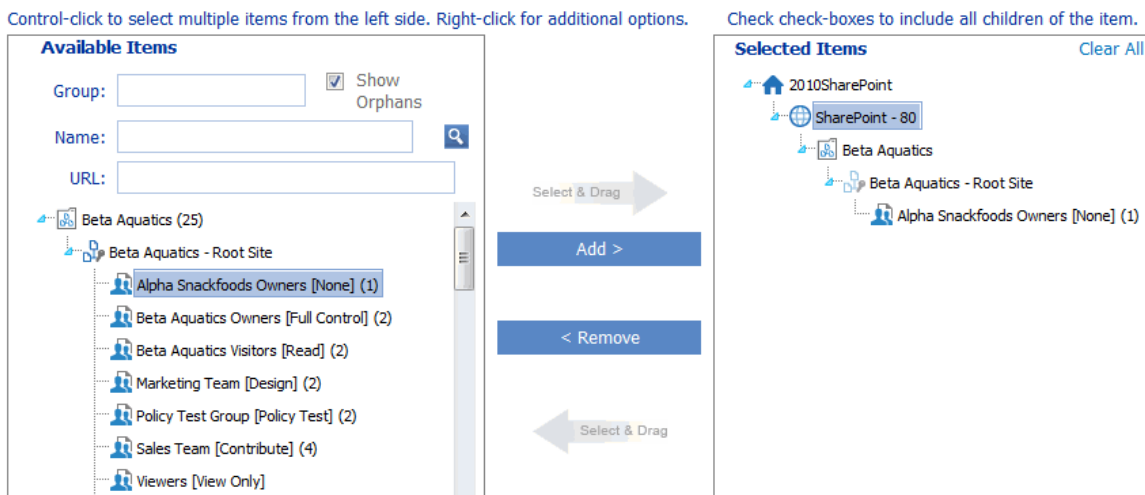

NOTE: All custom permissions levels that are currently assigned to at least one user within the scope of your selection display in the drop-down. (In a multi-farm environment, this list is populated from the permissions of the home farm.) If you want to assign a custom permissions level that has been defined for a site collection but either is not currently in use or exists only on a remote farm, you can type it into the drop-down.

- 5 If your selection includes one or more sites and you want the permissions to be applied to all lists within the site(s) that have unique permissions, check the **Propagate to All Lists with Unique Permissions** box.
- 6 If you have checked the **Propagate to All Lists with Unique Permissions** box and want the permissions to be applied to all *items* within the list(s) that have unique permissions, check the **Propagate to List Items** box.

NOTE: The "Propagate" options do not apply to lists that you selected explicitly. If you want to include items within explicitly-selected lists, use the **Include Children** or **Choose** option in the Selection panel. See also [Selecting List Items on Which to Perform a ControlPoint Operation](#).

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

Deleting SharePoint Group Permissions

The Delete SharePoint Group Permissions lets you delete the permissions of one or more SharePoint groups from a single site collection or site without removing its members or deleting the group itself.

NOTE: This action deletes *all* permissions currently assigned to a group. Once permissions have been removed from a SharePoint group, the group will display in the [SharePoint Group Analysis](#). Whether or not the group continues to display in the SharePoint Hierarchy or any ControlPoint group pickers depends on the Value of the ControlPoint Configuration Setting Show SharePoint Groups with No Permissions in Hierarchy.

This feature is not available at the farm (tenant) scope.

To delete SharePoint Group Permissions:

- 1 [Select the site collection or site whose group permissions you want to delete](#).

2 Choose **Users and Security** > **Delete SharePoint Group Permissions**.

Delete SharePoint Group Permissions > Select parameter(s) to act on Next, select

Select SharePoint Groups:

Control-click to select multiple items from the left side. Right-click for additional options.

Check check-boxes to include all children of the item.

Available Items

Group: ☒ Show Orphans

Name:

URL:

- Beta Aquatics (16)
 - Beta Aquatics - Root Site
 - Alpha Snackfoods Owners [None]
 - Organizer Ribbon Users [None] (5)
 - Beta Aquatics Owners [Full Control] (7)
 - Beta Aquatics Visitors [Read] (2)
 - Marketing Team [Design] (2)
 - Policy Test Group [Policy Test] (1)**
 - Promotions [Contribute] (1)
 - Sales Team [Contribute] (4)

Select & Drag

Add >

< Remove

Select & Drag

Selected Items Clear All

- 2013SharePoint
 - SharePoint - 80
 - Beta Aquatics
 - Beta Aquatics - Root Site
 - Policy Test Group [Policy Test] (1)**

Options for sites (and their containers):

☐ Propagate to all lists with unique permissions

☐ Propagate to all items with unique permissions

3 Select the group(s) whose permissions you want to delete as follows:

- From the **Available Items** list, select the group(s) to which you want to add users and move them to the **Selected Items** list.

Note that all groups defined for the entire site collection that have at least one associated permissions level display beneath the root site. Groups with unique permissions also display beneath the site granting those permissions. Any group that does not have at least one associated permissions level for the site collection or site will not display in the list.

TIP: If your Available Items list is particularly long, you may find it useful to narrow the scope by searching based on **Group** name, site **Name**, and/or site **URL**) and searching for the group. For example, if you want to narrow your scope to all group owners, enter "owner" in the Group field.

- Click [**Apply**].
- If your selection includes one or more sites and you want the permissions to be deleted from all lists within the site(s) that have unique permissions, check the **Propagate to All Lists with Unique Permissions** box.
 - If you have checked the **Propagate to All Lists with Unique Permissions** box and want the permissions to be deleted from all *items* within the list(s) that have unique permissions, check the **Propagate to List Items** box.

NOTE: The "Propagate" options do not apply to lists that you selected explicitly. If you want to include items within explicitly-selected lists, use the **Include Children** or **Choose** option in the Selection panel. See also [Selecting List Items on Which to Perform a ControlPoint Operation](#).

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Deleting SharePoint Groups

Use the Delete SharePoint Groups action to delete SharePoint groups from one or more site collections/sites in the farm.


To delete one or more SharePoint groups:

- 1 [Select the object\(s\) from which you want to delete SharePoint groups](#).
- 2 Choose **Users and Security > Delete SharePoint Groups**.
- 3 Select the SharePoint group(s) you want to delete as follows:
 - a) Select the group(s) from the **Available Items** list and move them to the **Selected Items** list.
Note that all groups defined for the entire site collection display beneath the root site. Groups with unique permissions also display beneath the site granting those permissions.

TIP: If your Available Items list is particularly long, you may find it useful to narrow the scope by searching based on **Group** name, site **Name**, and/or site **URL**) and searching for the group.

Delete SharePoint Groups > Select scope to act on ⓘ

Control-click to select multiple items from the left side. Right-click for additional options.

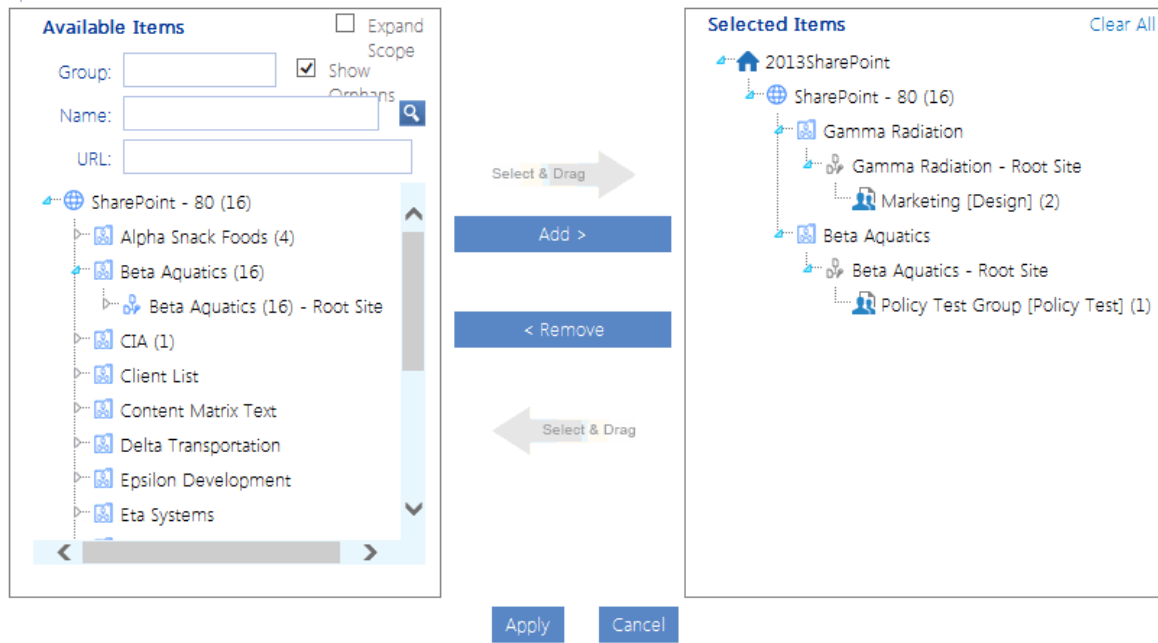

CAUTION: Because SharePoint groups are defined at the site collection level and may be used anywhere in the site collection, if you are performing the action on one or more individual sites that includes groups that are used elsewhere in the site collection, the groups will be deleted from unselected sites within the collection as well.

b) When you have finished adding groups to the Selected Items list, click **[Apply]**.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Managing Permissions Inheritance

The ControlPoint Manage Permissions Inheritance action lets you break or restore permissions inheritance of sites, subsites, lists, folders, and items across your SharePoint farm.

In a multi-farm environment, permissions inheritance can be managed across multiple farms.

SharePoint Objects Included in the Operation by Default



The following table identifies the SharePoint objects that are included in the Break/Restore Inheritance operation by default.

Operation	Scope	Objects Included by Default
Restore Inheritance	<ul style="list-style-type: none">FarmWeb Application, orSite Collection	All sites, subsites, lists, folders and items within the selected scope. NOTE: You can use the Change Selection option if you want to exclude individual sites, lists, folders, and items.
	Site	The site itself and all lists, folders and items within the site. NOTE: If you have checked the Include Children box in the Selection pane (that is, you want to include child sites of the selected site), you can also choose to <i>exclude</i> the selected site itself (so that child sites will inherit from it).
	List	The list itself. NOTE: By default folders and items are not acted upon. You can, however, use the Change Selection option to explicitly select any folders, and items you want to include.
Break Inheritance	<ul style="list-style-type: none">FarmWeb Application, orSite Collection	All sites and subsites within the selected scope. NOTE: By default, lists, folders, and items are not acted upon. You can, however, use the Change Selection option to explicitly select any lists, folders, and items you want to include.
	Site	The site itself and all subsites. NOTES: <ul style="list-style-type: none">By default, lists, folders, and items are not acted upon. You can, however, use the Change Selection option to explicitly select any lists, folders, and items you want to include.


Operation	Scope	Objects Included by Default
		<ul style="list-style-type: none"> If you have checked the Include Children box in the Selection pane (that is, you want to include child sites of the selected site), you can also choose to <i>exclude</i> the selected site itself (so that child sites will no longer inherit from it).
	List	<p>The list itself.</p> <p>NOTE: By default, folders and items are not acted upon. You can, however, use the Change Selection option to explicitly select any folders, and items you want to include.</p>

To manage permissions inheritance:

- 1 [Select the object\(s\) for which you want to break or restore inheritance.](#)
- 2 Choose **Users and Security > Manage Permissions Inheritance**.
- 3 Use the information in the following table to determine the appropriate action to take.

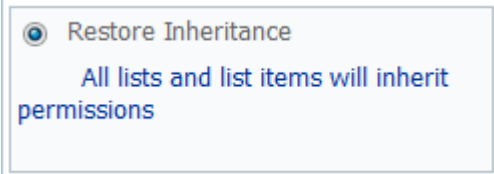If you want to ...	Then ...
restore permissions inheritance	<p>select the Restore Inheritance radio button.</p> 
break permissions inheritance	<p>a. Select the Break Inheritance radio button.</p> <p>b. Select whether you want to:</p> <ul style="list-style-type: none"> • Copy Permissions from Parent <p>OR</p> <ul style="list-style-type: none"> • Leave Permissions Empty. 

- 4 If you initiated the action at the site level and want to act *only* on child site(s), check the **Include Children only (exclude selected sites)** box.

☐ Include children only (excludes selected sites) 

NOTE: This option is valid only if one or more *sites* (other than root sites) were explicitly selected.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Managing SharePoint Groups

ControlPoint Manage SharePoint Groups is a farm-level action that lets you propagate the permissions and membership of a SharePoint group on one site with groups on one or more different sites in the same farm. You can either:

- overwrite the membership and permissions of an existing group (but retain the group's name)
 - EXCEPTION: Permissions of a group within a list, folder, or item that has unique (non-inherited) permissions will not be changed.

OR

- create a new group with the same name, membership, and permissions as the model group.

ControlPoint Group Management Terminology

Association - The relationship between the SharePoint group whose permissions and membership you want to propagate and all of the groups *to which* you want to propagate them.

Model Group -The SharePoint group whose permissions and membership you want to propagate.

Dependent Group(s) - The SharePoint group(s) to which you are propagating the membership and permissions of the model group. You "adopt" a new dependent group when you add it to an association.

Synchronize - The act of propagating permissions and membership of a model group to its dependent groups. Whenever you synchronize groups within an association, the existing permissions and/or membership of dependent groups are overwritten with those of the model group.

NOTE: Synchronization is a one-way process (that is, model to dependents only). Although changes to model groups are not automatically propagated to dependent groups, you can schedule a synchronization to run on a regular basis to ensure that model and dependent groups remain in sync. You can choose to synchronize the permissions of the model group only, the group's membership only, or both permissions and membership.

In a multi-farm environment, SharePoint groups can be managed for a single farm; either the home farm or a remote farm.

To access the Manage SharePoint Groups workspace:

From the farm or Web Application level of the SharePoint Hierarchy, choose **Automation > Manage SharePoint Groups**.

Manage SharePoint Groups > Select parameter(s) to act on ⓘ

Association Name	Name	Group Name	Group Description	Site Name	Site URL	Permissions	# Users	Details
Alpha Snack	Edit	Alpha Snack	Use this group to grant people	Alpha Snack	http://2010foundation:118	Contribute	3	View
Company Blc	Edit	Company Blc	Use this group to grant people	Company Blc	http://2010foundation:400	Read	0	View
ControlPoint	Edit	ControlPoint	This group is for ControlPoint	ControlPoint	http://2010foundation:181	Full Control	2	View
Operations C	Edit	Operations C	Use this group to grant people	Operations	http://2010foundation:400	Full Control	1	View

Create New Association	Synchronize Now	Dissolve Association	Delete Association and Groups
--	---------------------------------	--------------------------------------	---

Group Name	Site Name	Site URL	Sync Memb	Sync Perm	Adoption Dat	Details
ALPHA SNACKFOODS MEMBERS	Diogenes Patent Attorneys	http://extranet:28733	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	06/12/2012	View
ALPHA SNACKFOODS MEMBERS	Meadowbrook Construction LLC	http://2010foundation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	06/12/2012	View

The top grid lists all existing associations with the following information:

- the **Association Name**
- a link that enables you to **Edit** the Association Name.
- the model **Group Name**
- the **Group Description** (as specified in SharePoint Group Settings page)
- the **Site Name** and **Site URL** where the model group resides
- **Permissions** associated with the group
- the **# of Users** with Permissions for the group
- a **Details** link that lets you open the SharePoint People and Groups page for the model group.

When you select a group in the top grid, the bottom grid lists all of the dependent groups in the association, along with the following information:

- the dependent **Group Name**
- the **Site Name** and **Site URL** where the dependent group resides
- the **Adoption Date** (that is, the date the dependent group was added to the association)
- a **View Details** link that lets you open the SharePoint People and Groups page for the dependent group.

Now you can:

- [Associate a SharePoint Group from One Site with Other Sites](#)
- [Maintain SharePoint Group Associations](#)
- [Dissolve Group Associations and/or Delete SharePoint Groups](#).

Associating a SharePoint Group from One Site with Other Sites

Factors to Consider Before Associating Groups

- A group can be a member of only one association; *either* as a model *or* a dependent.
- A dependent group cannot be created on a site that inherits permissions from its parent.
- If the permission level of the model group does not exist in the target site collection, it will be created there.
- If the owner of the model group is either a valid "user" or a SharePoint group that exists in the target site collection, that user or group will become the owner of the dependent group. If the owner is not a valid user (for example, a SharePoint group or built-in account such as SharePoint\system or NT AUTHORITY\authenticated users) or is a SharePoint group that does *not* exist in the target site collection, the user requesting the action will become the owner of the dependent group.

EXCEPTION: If the dependent group already exists in the target location (that is, you are not creating a new group), group ownership will remain unchanged.


To create a new association:

- 1 From the Group Management workspace, click [**Create New Association**] to display the model group picker.

NOTE: By default, the left side of the picker includes Web Applications within the selected scope. You can, however, check the **Expand Scope** box to include all Web Applications within the farm.

One new dependant has been adopted.

Association N	Name	Group Name	Group Description	Site Name	Site URL	Permissions	# Users	Details
Alpha Snack	Edit	Alpha Snack	Use this group to grant people	Alpha Snack	http://2010foundation:118	Contribute	3	View
Company Blc	Edit	Company Blc	Use this group to grant people	Company Blc	http://2010foundation:400	Read	0	View
ControlPoint	Edit	ControlPoint	This group is for ControlPoint	ControlPoint	http://2010foundation:181	Full Control	2	View
Operations C	Edit	Operations C	Use this group to grant people	Operations	http://2010foundation:400	Full Control	1	View

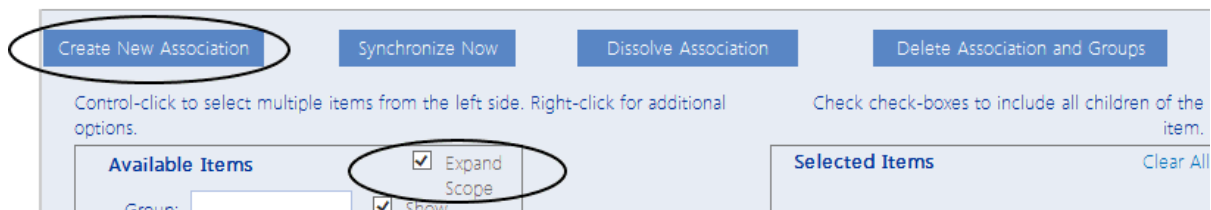

- 2 Use the information in the table below to determine the appropriate action to take.

If you want to ...	Then ...
use an existing group as the model	select the <i>group</i> that you want to use as a model from the left pane and move it to the right pane. NOTE: You cannot select a group that already belongs to an association (either as a model or a dependent).
create a new group to use as a model	<p>a. Select the site within which you want to create the model group in the left pane.</p> <p>b. Click [Create New SP Group].</p>

If you want to ...	Then ...
	<p>c. Complete the appropriate fields on the SharePoint New Group page.</p> <p>d. Click [Create] to close the page.</p> <p>The group you just created will now be available for selection in the model group picker.</p>

3 Click **[Create Association]**.

The model group displays in the grid at the top of the workspace with the following information:

- **Association Name** (This is, by default, the name of the model group. You can, however click the **Edit Assoc. Name** Edit link and specify a different name.)
- **Group Name** and **Group Description** (as specified on the SharePoint Group Settings page)
- **Site Name** and **Site URL**
- **Permissions** level(s)
- **# Users** in the group.

Association Name	Name	Group Name	Group Description	Site Name	Site URL	Permissions	# Users	Details
Alpha Snackfood:	Edit	Alpha Snackfoc	Use this group to grant people contribu	Alpha Snackfoo	http://2010foundation:11808/sil	Contribute	3	View



To open the SharePoint People and Groups page for the group, click the View link in the **Details** column.

4 Scroll to the bottom of the workspace.

5 Click **[Adopt New Dependents]** to display the dependent group picker.

6 Use the information in the following table to determine the appropriate action to take.

NOTE: By default, the left side of the picker includes Web Applications within the selected scope. You can, however, check the **Expand Scope** box to include all Web Applications within the farm. If you want to associate a dependent group in a newly-created site, it may take several minutes for the site to appear in the picker.

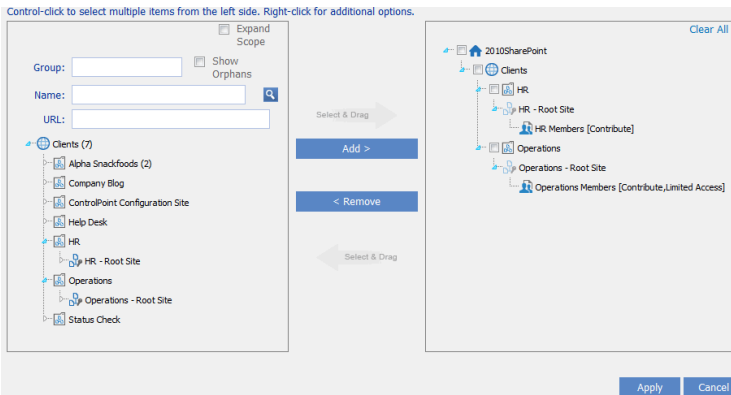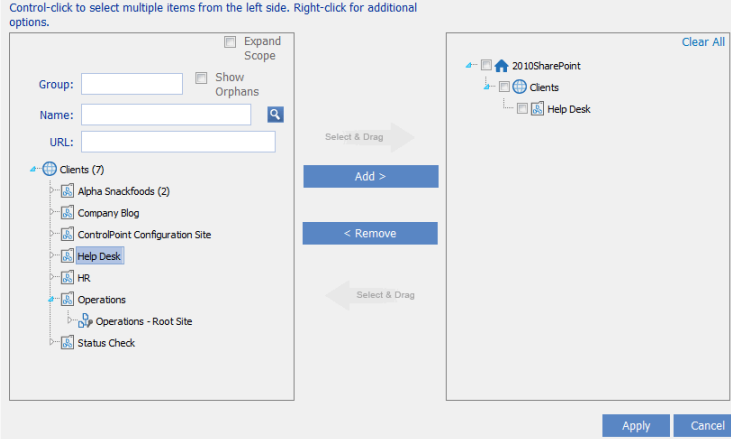If you want to ...	Then ...
associate one or more existing groups with the model group NOTE: When you choose this option, the name and owner of the dependent group will remain the same, but the membership and permissions will be overwritten with those of the model group.	select the group(s) from the left pane and move them to the right pane. 
create a new group to associate with the model group NOTE: When you choose this option the name, membership, and permissions of the dependent group will be the same as those of the model group.	select the site within which you want to create the dependent group and move it to the right pane. 

7 Click **[Apply]**.

By default, both group membership and permissions are synchronized. However, if you want to synchronize *only* permissions *or* membership, uncheck the other option.

Group Name	Site Name	Site URL	Sync Membership	Sync Permissions	Adoption D
MEADOWBROOK MEMBERS	Meadowbrook	http://...	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	01/19/2012
VIEWERS	PShellUser	http://...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	01/19/2012

Now you can either:

- synchronize model and dependent group(s) immediately, (by clicking **[Synchronize]**)

OR

- complete the Schedule Synchronization section and [schedule the synchronization to run at a later time or on a recurring basis](#).

TIP: Schedule the synchronization to run on a recurring basis if you want to ensure that groups *remain* in sync.

Maintaining SharePoint Group Associations

Synchronizing Associated SharePoint Groups

When you create a new association, the membership and site-level permissions associated with the model group are copied to the dependent group(s) as part of the operation. To copy future changes to group membership or permissions, you must synchronize the model group with its dependents.

TIP: You can run a synchronization on a regular schedule, to ensure that groups remain in sync.

Synchronization applies to an entire association (that is, any changes to the model group will be propagated to *all* dependents in the association). Keep in mind that that, when you synchronize an association, any changes that have been made directly to a dependent group will be overwritten.

To synchronize associated groups:

- 1 In the Group Management workspace, highlight the model group (in the top grid) whose dependents you want to synchronize.
- 2 Either
 - synchronize groups immediately, by clicking the [**Synchronize**] button

OR

- [schedule the synchronization to run at a later time and/or on a regular schedule](#).

NOTE: You can only synchronize (or schedule a synchronization for) one association at a time, and you cannot schedule a synchronization for a newly-created site until ControlPoint Discovery has been run.

Dissolving Group Associations and Deleting SharePoint Groups

You can:

- dissolve an association, and either:
 - retain the model and dependent groups in their respective SharePoint sites
- OR
- delete the model group and all of its dependents from their respective SharePoint sites

- disconnect one or more dependent group(s) from an association, and either:
 - retain the group in the SharePoint site
 OR
 - delete the group from SharePoint.

To dissolve an association and retain model and dependent groups in SharePoint

- 1 In the Manage SharePoint Groups association (upper) grid, highlight the association that you want to dissolve.
- 2 Click [**Dissolve Association**].

Association Name	Name	Group Name	Group Description	Site Name	Site URL	Permissions	# Users	Details
Alpha Snackfoods	Edit	Alpha Snackf	Use this group to grant peop	Alpha Snackf	http://2010foundation:1180	Contribute	3	View
Company Blog Vi	Edit	Company Blo	Use this group to grant peop	Company Blo	http://2010foundation:4004	Read	0	View
ControlPoint Appl	Edit	ControlPoint	This group is for ControlPoin	ControlPoint	http://2010foundation:1818	Full Control	2	View
Operations Owne	Edit	Operations O	Use this group to grant peop	Operations	http://2010foundation:4004	Full Control	1	View

Create New Association		Synchronize Now	Dissolve Association	Delete Association and Groups		
Group Name	Site Name	Site URL	Sync Memb	Sync Perm	Adoption Dat	Details
ADMINISTRATORS	ControlPoint Configuration Site	http://2010foundation:11	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	06/12/2012	View

Both the association model and dependent groups are:

- removed from the grids
- retained in their respective SharePoint sites.

To dissolve an association and delete model and dependent groups from SharePoint

- 1 In the Manage SharePoint Groups association (upper) grid, highlight the association that you want to dissolve.
- 2 Click [**Delete Association and Groups**].

Both the association model and dependent groups are


- removed from the grids
- removed from their respective SharePoint sites.

To disconnect dependent groups from an association and retain the groups in SharePoint:

- 1 In the Manage SharePoint Groups association (upper) grid, highlight the association from which you want to disconnect dependent group(s).
- 2 In the dependent (lower) grid, highlight the group(s) that you want to disconnect.
- 3 Click **[Disconnect Selection]**.

Association Name	Name	Group Name	Group Description	Site Name	Site URL	Permissions	# Users	Details
Alpha Snackfoods	Edit	Alpha Snackf	Use this group to grant peop	Alpha Snackf	http://2010foundation:1180	Contribute	3	View
Company Blog Vi	Edit	Company Blo	Use this group to grant peop	Company Blo	http://2010foundation:4004	Read	0	View
ControlPoint Appl	Edit	ControlPoint	This group is for ControlPoin	ControlPoint	http://2010foundation:1818	Full Control	2	View
Operations Owne	Edit	Operations O	Use this group to grant peop	Operations	http://2010foundation:4004	Full Control	1	View

Create New Association		Synchronize No	Dissolve Association	Delete Association and Groups			
Group Name	Site Name	Site URL	Sync Memb	Sync Permi	Adoption Dat	Details	
ADMINISTRATORS	ControlPoint Configuration Site	http://2010foundation:11	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	06/12/2012	View	



The selected dependent groups are:

- removed from the grid, and
- retained in SharePoint sites.


To disconnect dependent groups from an association and delete them from SharePoint:

- 1 In the Manage SharePoint Groups association (upper) grid, highlight the association from which you want to disconnect dependent group(s).

- 2 In the dependent (lower) grid, highlight the dependent group(s) that you want to disconnect.

Association Name	Name	Group Name	Group Description	Site Name	Site URL	Permissions	# Users	Details
Alpha Snackfoods	Edit	Alpha Snackf	Use this group to grant peop	Alpha Snackf	http://2010foundation:1180	Contribute	3	View
Company Blog Vi	Edit	Company Blo	Use this group to grant peop	Company Blo	http://2010foundation:4004	Read	0	View
ControlPoint Appl	Edit	ControlPoint	This group is for ControlPoin	ControlPoint	http://2010foundation:1818	Full Control	2	View
Operations Owne	Edit	Operations O	Use this group to grant peop	Operations	http://2010foundation:4004	Full Control	1	View

Create New Association	Synchronize Now	Dissolve Association	Delete Association and Groups			
Group Name	Site Name	Site URL	Sync Memb	Sync Perm	Adoption Date	Details
ADMINISTRATORS	ControlPoint Configuration Site	http://2010foundation:11	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	06/12/2012	View



- 3 Click [**Delete Selection**].

The selected dependent groups are:

- removed from the Group Management grid, and
- removed from SharePoint sites.

Backing Up and Restoring Site Permissions

The ControlPoint Backup Permissions action lets you back up the permissions of one or more SharePoint sites, which includes:

- permissions granted to users or groups specified in Active Directory or other authentication providers
- permissions granted to SharePoint groups
- membership in SharePoint groups.

The following are *not* backed up:

- Permission level definitions
- SharePoint group definitions
- Active Directory group membership

A separate backup is created for each site within a site collection. For example, if you choose to back up a site collection that contains multiple subsites, a separate backup will be made of the root site and each subsite.

In a multi-farm environment, permissions backups can be created and managed for the home farm only.

Restoring Permissions from a Backup

You can restore permissions from a backup using the ControlPoint Manage Permissions Backups feature. You can choose whether or not to restore SharePoint groups that have been deleted, membership in SharePoint groups, and/or Site Collection Administrators.

Changes that are made between the time when permissions are backed up and restored are handled as follows:

- If an object had unique permissions at the time of the backup has since been made inherited, the unique permissions will be restored.
- If a site has been deleted since the backup was made, it will be skipped.
- If it can be determined that a user no longer exists (on the site, Active Directory group, server etc.), permissions for that user will not be restored.
- Any new list or list item has been added since the backup was created will remain intact.
- The permissions of any user who was given *direct* permissions since the backup was created will be deleted (the user(s) will remain in the SharePoint All People list, however). If you choose to restore group membership, any users added to a SharePoint group since the backup was created will *not* be deleted. Because SharePoint groups are defined at the site collection level, deleting a user would remove the user's permissions to all sites within the collection that use that group.

Backing Up Site Permissions

Use the ControlPoint **Backup Permissions** action to back up permissions on one or more SharePoint sites, to maintain the integrity of site security throughout your farm.

For example, you may want to back up permissions:

- for the entire farm on a regular basis (such as weekly)
- to have a "snapshot" of the original permissions set up for a newly created site
- before performing an administrative action that may compromise site security settings.

Permissions are backed up site by site, with permissions for each individual site saved as a separate line item in the data table xcPermissionsbackup—in the ControlPoint Service (xcAdmin) database —along with the date and time of the operation. Definitions of permissions levels are not backed up.

NOTE: Depending on the scope of the operation and the number of objects (sites, lists, and/or list items) with unique permissions, the permissions backup process can be time-consuming and resource-

intensive. Therefore, it is recommended that you perform the operation—or schedule the operation to run—when system usage is low.

To back up site permissions:

- 1 [Select the object\(s\) containing the sites whose permissions you want to back up.](#)
- 2 Choose **Users and Security > Backup Permissions**.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- complete the Enforce Policy section and [schedule the operation to run at a later time.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Restoring Site Permissions from a Backup

Use the **Manage Permissions Backups** action to restore user permissions for one or more sites whose permissions have been backed up. You can choose whether or not to restore from the backup:

- SharePoint groups that may have been deleted
- the membership of SharePoint groups, and/or
- the Site Collection Administrator.

REMINDER: Permissions That are Restored/Not Restored

- Definitions of permissions levels cannot be backed up, and therefore cannot be restored. If a permissions level was deleted from a site since the Backup Date, an error will be reported.
- Any sites that have been deleted since the Backup Date will not be restored, nor will permissions for users who are no longer valid on the server or in Active Directory (that is, user accounts that have been deleted or disabled in Active Directory).

- For any object that currently has unique permissions but had inherited permissions as of the Backup Date, inheritance will be restored. Conversely, for any object with unique permissions that had inherited permissions as of the Backup date, the unique permissions will be restored.
- The permissions of any user who was given *direct* permissions since the Backup Date will be deleted. If you choose to restore group membership, however, any user added to a SharePoint group since the Backup Date will *not* be deleted, as that user may have permissions to other sites in the collection via membership in the group.
- Any lists and list items created after the Backup Date will remain intact.

To restore permissions backups:

- 1 [Select the object\(s\) whose permissions you want to restore.](#)
- 2 Choose **Users and Security > Manage Permissions Backups**.

Manage Permissions Backups > Select parameter(s) to act on ⓘ

Show Backups from Show Backups until [Refresh Display](#)

[Select All](#) [Delete selected backups](#) [Restore from selected backup](#) ☒ Show most recent backup for each site

☒ Restore groups ☒ Restore users to groups ☒ Restore Site Administrator status

Select	Backup Date ▲	WEB URL	Site Collection	Web	Web Application
<input type="checkbox"/>	7/16/2015 12:24:30 PM	http://2010foundation	Client List	Client List	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:09 PM	http://2010foundation/site	Alpha Snack Foods	Alpha Snack Foods	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:19 PM	http://2010foundation/site	Alpha Snack FoodsBaking Technology	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:26 PM	http://2010foundation/site	Alpha Snack FoodsSkunkworks Project	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:29 PM	http://2010foundation/site	Alpha Snack FoodsHealthy Foods	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:37 PM	http://2010foundation/site	Alpha Snack FoodsTofu Bars	SharePoint - 80

The **Show most recent backups for each site** box is checked by default and only the most recent backup for each site within the scope of your selection will display. You can, however, check or uncheck this box as needed.

- 3 If you want to narrow the list to backups to a specific date range:
 - a) Select a **Show Backups from** and **Show Backups until** date () and time ()
 - b) Click [**Refresh Display**].
- 4 Check the appropriate restore option(s):
 - **Restore groups** - Check this box if you want any SharePoint groups (and group membership) that have been deleted since the Backup Date to be restored. If you leave this box unchecked, groups will not be restored.
 - **Restore users to groups** - Check this box if you want to restore membership in SharePoint groups that may have changed since the Backup Date. (That is, any deleted users will be restored. Users that have been added to group since the Backup Date will not be deleted,

however.) If you leave this box unchecked, only members that have been added to the group since the backup date (if any) will be retained.

REMINDER: Users who are no longer valid on the server or in Active Directory will not be restored.

- **Restore Site Administrator** - Check this box if you want to restore the Site Administrator(s) that existed as of the backup date. If you leave this box unchecked, the current Site Administrator(s) will be retained.
- 5 Highlight the row(s) containing the backups from which you want to restore permissions. To select multiple backups, use the **[Shift]** and **[Ctrl]** keys in the conventional manner.

Now you can:

- run the action immediately, (by clicking the **[Restore from selected backup]** button)

OR

- [schedule the restore to run at a later time](#)

OR

- [generate an xml file with instructions that can be run at a later time](#) (by clicking **[Save Instructions for Restore]**).

If you chose the Run Now, option, after the operation has been processed:



- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Deleting Permissions Backups

From the Manage Permissions Backups interface you can delete one or more permissions backups. You can also purge *all* backups created before a specified date.

NOTE: If you want to narrow the list to backups to a specific date range, select a **Show Backups from** and **Show Backups until** date () and time () , then click **[Refresh Display]**.

Manage Permissions Backups > Select parameter(s) to act on

Show Backups from Show Backups until [Refresh Display](#)

[Select All](#) [Delete selected backups](#) [Restore from selected backup](#) ☒ Show most recent backup for each site

☒ Restore groups ☒ Restore users to groups ☒ Restore Site Administrator status

Select	Backup Date ^	WEB URL	Site Collection	Web	Web Application
<input type="checkbox"/>	7/16/2015 12:24:30 PM	http://2010foundation	Client List	Client List	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:09 PM	http://2010foundation/site	Alpha Snack Foods	Alpha Snack Foods	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:19 PM	http://2010foundation/site	Alpha Snack FoodsBaking Technology	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:26 PM	http://2010foundation/site	Alpha Snack FoodsSkunkworks Project	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:29 PM	http://2010foundation/site	Alpha Snack FoodsHealthy Foods	SharePoint - 80
<input type="checkbox"/>	7/16/2015 12:25:37 PM	http://2010foundation/site	Alpha Snack FoodsTofu Bars	SharePoint - 80

To delete selected backup(s):

- 1 In the **Select** column, check the box beside each backup you want to delete.*
- 2 Click **[Delete selected backups]**.

You will be prompted to confirm the deletion before the operation is carried out.

To delete all backups:

- 1 Click **[Select All]**.*
- 2 Click **[Delete selected backups]**.

You will be prompted to confirm the deletion before the operation is carried out.

*NOTE: If you want to de-select currently selected backups, click **[Reset]**.

To purge all backups created before a specific date:

- 1 Scroll to the bottom of the Manage Permissions Backups page.
- 2 For **Purge all Backups in the Farm before this date**, select the earliest date for which you want to retain permissions backups.
- 3 Click **[Purge]**.

Purge all Backups in the Farm before this date

[Purge](#)

Duplicating Security from One Site to Others

The **Duplicate Site Security** action lets you to copy the security settings (users, groups, and permissions) of a SharePoint site to one or more other sites within the same farm. This may be useful, for example, if you have created one or more new SharePoint sites and want them to have the same users, groups, and permissions as an existing site.

You also have the option of backing up destination site permissions before the Duplicate Site Security action is carried out.

In a multi-farm environment, site security can be duplicated within a single farm; either the home farm or a remote farm.

Factors to Consider before Duplicating Site Security

- Duplicate Site Security is a one-time action. Any ongoing changes to permissions on the source site will not be replicated to the destination site(s). You can, however, schedule the action to run on a recurring basis.
- The action will replace the list of users with direct permissions on a destination site with that of the source site.
- Any permissions level referenced in the source site that does not exist in the destination site collection will be created there as a custom permissions level (even if it exists as a SharePoint *default* permission level in the source site collection). If custom permissions levels with the same name but different definitions exist in both locations, you can choose whether or not to overwrite the definitions in the destination site collection.
- If you duplicate security to a site that inherits permissions from its parent, that inheritance will be broken and it will become a site with unique permissions that have been copied from the source. Conversely, if you duplicate security to a parent site, child objects with inherited permissions will inherit the new permissions that have been copied from the source.
- You have the option of duplicating permissions (and breaking any existing inheritance) to target lists with identical names (for example, Calendar to Calendar; Shared Documents to Shared Documents). You cannot, however, duplicate permissions of list *items*.
- Any list with unique permissions on the destination site that does not exist in the source site will remain intact.

How "Matching" Groups Are Handled

SharePoint groups that include the name of the source site (such as Owners, Members, and Visitors) will be matched to equivalent groups on the destination site, using the destination site name. (For example, Source Owners will be matched to Target Owners and so on.) Whenever a "matching" group already exists on the destination site, the action can:

- add members of the source group to the target group, if they are not already there

OR

- replace members of the target group with members of the source group

OR

- leave the target group membership unchanged.

If a group on the destination site has a matching name but the permissions level is different, ControlPoint will replace the permissions level of the destination group with that of the source group.

Other group settings, including Group Owner, will not be changed.

If a matching group is not found at the destination:

It will be created—using the name of the destination site—and the membership will be copied from the source. Additional settings will be handled as described in the following table.

Setting	Action That Will be Taken
Group Owner	ControlPoint will attempt to use the group owner—which may be either an individual or another SharePoint group—from the source site (provided that owner <i>already</i> exists on the destination site). If the owner does not exist at the definition, the ControlPoint user who is performing the action will become the group owner.
Other group settings	the SharePoint <i>default</i> values will be used (regardless of whether they match the settings for the source group).

To duplicate site security:

- 1 In the SharePoint Hierarchy, select the site whose security you want to duplicate.

NOTE: This action is only available at the site level.

- 2 Right-click and choose **Users and Security > Duplicate Site Security**.

- 3 If you want to back up permissions on the destination site(s) before performing the duplicate action, check the **Backup site permissions before duplicating** box.

NOTE: If you check this box and encounter issues with the operation, you can restore permissions from the backup using the procedure for [Restoring Site Permissions from a Backup](#).

- 4 If you want custom permissions level definitions from the source to replace any in the destination site collection that have the same name, leave the **Replace custom permission level definition if it is not the same in the target** box checked.

NOTE: If you uncheck this box, existing custom permissions level definitions will not be changed.

- 5 If you want permissions of source site lists to be carried over to destination site lists of the same name, leave the **Duplicate permissions on lists with matching names** checked.

NOTE: If you uncheck this box, permissions for lists with matching names will not be changed.

6 Specify how you want the action to proceed **When a matching group name is encountered:**

- Add members from source site if they are not already in target site

OR

- Replace members with members from source site

OR

- Leave existing group membership as is

7 From the **Available Items** list, select the site(s) to which you want permissions duplicated and move them to the **Selected Items** list.

8 When you have finished selecting sites, click **[Apply]**

Duplicate Site Security > Select parameter(s) to act on ?

Duplicate permissions from the selected source site to selected site below

- ☒ Backup site permissions before duplicating
- ☒ Replace custom permission level definition if it is not the same in the target
- ☒ Duplicate permissions on child lists with matching names in target

When a matching group name is encountered:

- ☒ Add members from source site if they are not already in target site
- ☐ Replace members with members from source site
- ☐ Leave existing group membership as is

	Remove	Include Children	Type	URL
▶	<input checked="" type="checkbox"/>	<input type="checkbox"/>	👤	http://2010foundation:40042/sites/Operations
▶	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	📁	http://myportal:35366/sites/hr

[Change selection](#)
[Save Selection](#)
[Upload Saved Selection](#)

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit.](#)

Data Analysis and Reporting

ControlPoint offers several advanced tools for analyzing data in the SharePoint environment, including:

- a summary of components and statistics at different levels of the SharePoint Hierarchy
- activity throughout the SharePoint farm
- storage used by various SharePoint objects
- site content
- information about users, including:
 - permissions for Web applications, site collections, sites, and pages, and
 - "orphaned" users, which are users who have permissions within SharePoint but are no longer listed in the Active Directory
- trends over a specified time period
- the contents of SharePoint audit and change logs.

An additional tool, the ControlPoint Task Audit, enable you to review ControlPoint actions taken by administrators.

Analysis tools are accessible for various levels of the hierarchy. As with other ControlPoint features, the scope of the analysis is determined by the hierarchical context.

Most analyses can also be configured so that they can be invoked directly from a url, which can be bookmarked, emailed, or placed on a SharePoint site.


NOTE: This chapter describes all of the ControlPoint analysis tools. Depending on the configuration of your ControlPoint menus, however, the analysis tools to which you have access, and their location in the menus invoked from the left navigation pane, may vary.

You can also [create dashboards for monitoring key statistics within your farm](#).

Specifying Parameters for Your Analysis

When you select a ControlPoint analysis tool from the left navigation pane, you are prompted to specify the parameters you want to use. The most common parameters used in various ControlPoint analysis tools are described below.

Note that, depending on the analysis, some parameters may be located in the **Advanced Parameters** section.

Advanced Parameters 

<input type="checkbox"/> Calculate Total Users with Permissions	<input checked="" type="checkbox"/> Show unique permissions only
<input type="checkbox"/> Include users with AD group membership	<input type="checkbox"/> Include AD Group Members table
<input type="checkbox"/> Include only users with Direct permissions	<input type="checkbox"/> Display with results expanded
<input type="checkbox"/> Show Anonymous Access Only	<input type="checkbox"/> Open drill-downs in new window

Cached vs. Real-time Data

Some ControlPoint analyses give you the option of using either cached or real-time data for analyses performed on the farm, one or more Web applications, or site collections.

☒ Use cached data


If the **Use cached data** box is checked, your analysis will include data that has been collected by ControlPoint during the last run of Discovery . The advantage of using cached data is that the analysis will be processed more quickly and will not compete for system resources. Because Discovery is run on a nightly basis, the use of cached data is often sufficient, especially when the analysis contains data that is not likely to change significantly over the course of a day.


The advantage of using **real-time data** (when the **Use cached data** box is unchecked) is that your analysis will contain the most current information. However, because the data is being captured in real time, the analysis will take longer to process and may tie up system resources.

IMPORTANT: For analyses performed on a single site collection or site, real-time data is *always* used and the **Use cached data** option is disabled. Because data collection within a single site collection or site is less time-consuming, the impact on system resources is minimal.

Specific Date or Time Period

For analyses that cover a specific time period, you select the time period by specifying a **Start Date** and **End Date**.

Start date: 

End date: 

For analyses that involve *activity*, only cached data is used, since these analyses are based on accumulated summary data collected nightly by SharePoint usage analysis jobs.

For analyses involving other types of data (such as site collection storage) you are given the option of using real-time data.


IMPORTANT: Historical data that predates the ControlPoint cache will not be reflected in analysis results. For example, if the ControlPoint cache was created two weeks ago, a maximum of two weeks-worth of data is available for analysis, regardless of the date range you specify. Similarly, any historical data that postdates the last run of ControlPoint Discovery will not be reflected in results. For example, if you request data for a time period that covers the last 30 days and the last time Discovery ran was 10 days ago, analysis results will reflect the time period *up to* the last Discovery run date.

The format that ControlPoint uses to display dates is based on browser settings (rather than server settings). If you want to change the format (from mm/dd/yy to dd/mm/yy for example), go to Internet Options and change the Language Preference.


It is worth noting that deleted sites will display in activity and storage analysis results if they were active during the specified time period.

Open drill-down Options

For analyses that allow you to drill down to a more detailed ControlPoint analysis, you can choose to display it in a separate window by checking the **Open drill-downs in new window** box.



If you leave this box unchecked, the analysis to which you are drilling down will display in the current workspace, and parameters from the original analysis will be carried over. You can return to the original analysis by clicking the Back arrow in the report header.




Note that, when you link to a *SharePoint* page from analysis results, it always displays in a separate window.

Expanded Results Option

For most analyses that contain nested data, you have the option of choosing whether or not you want to display results expanded.

If you want to display results at the highest level of detail, uncheck the **Display with results expanded** box. You can then expand items individually, and view, print, or export additional detail for selected items only.



If your analysis contains a lot of nested data and you want to view, search, print, or export all of the analysis detail without drilling down, you may choose to have results display fully expanded by checking the **Display with results expanded** box .

TIP: If you choose to display expanded results and your analysis contains a large amount of data, you can use the Document Map to more easily navigate through results. See [Analysis Results Display](#).

Additional Parameters for Permissions Analyses

The following parameters are specific to SharePoint user permissions analyses:

- If you want to limit results to one or more specific users, the **Select users** field allows you to [select the users you want to include in your analysis](#). If you leave this field blank, all users will be included.

Select users (blank for all):

A screenshot of a text input field with a light blue border. Inside the field, the text 'Mark Twain ; James Joyce ;' is entered. To the right of the field, there are two small icons: a question mark in a square and a magnifying glass.

NOTE: You must use real-time (not cached) data if you are selecting users based on a SharePoint User Profile Property.

- If the scope of your analysis includes sites with multiple child objects, you can choose to display all objects (including those whose permissions are inherited) by unchecking the **Show Unique Permissions Only** box.

☒ Show unique permissions only

NOTE: If this option is checked, only sites with unique (non-inherited) permissions will be included in the results.

- If you want results to include only users who have direct permissions (that is, do not have permissions via a SharePoint group), check the **Include only users with Direct permissions** box.

☒ Include only users with Direct permissions

TIP: You can use this option to identify "rogue users" who *should* have permissions through membership in a SharePoint group, then initiate an Add User to Groups action directly from analysis results. See [Acting on Search or Data Analysis Results](#).

- If your selection includes Active Directory groups and you are running the analysis using real-time data:

- You can include separate line items for users who have permissions through those groups by checking the **Include users with AD group membership** box.



If you leave this box unchecked, only the permissions of the AD group itself (not the users within it) will be included in analysis results.

- You can include a summary section at the end of the analysis that lists the Active Directory groups within the scope of your analysis along with all of their members by checking the **Include AD Group Members table** box.

☒ Include AD Group Members table


Active Directory Group Members

Group / User	Total members in AD group
<input checked="" type="checkbox"/> bellum\development	5
bellum\jamesjoyce	
bellum\marktwain	
bellum\isaacasimov	
bellum\clarkkent	
bellum\agathachristie	
<input checked="" type="checkbox"/> bellum\patentattorneys	5
bellum\jamesjoyce	
bellum\marktwain	
bellum\washingtonirving	
bellum\isaacasimov	
bellum\olivertwist	

NOTE: You cannot display membership in Active Directory groups if you are running the analysis on *cached* data (and the checkbox will be disabled). If the ControlPoint Application Administrator has configured the application to prevent members of Active Directory groups from being displayed, this option will not be visible. Built-in groups (such as authenticated users) are not counted.

- If you want to limit results to one or more specific permissions levels, select them from the **Limit to Users with permissions level(s)** list box. (All built-in and custom permissions levels that are currently assigned to at least one user on at least one site within the scope of your analysis display in the this box.)

Limit to users with permission level(s):

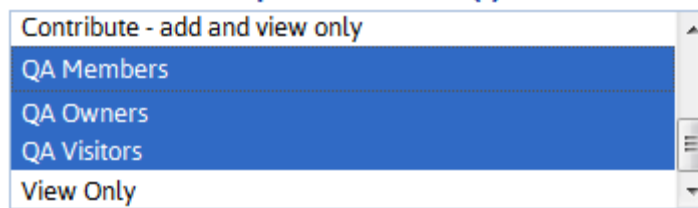

If the analyses includes lists and/or items, permissions levels that are assigned to a list/item that are *not* assigned at the site level will not display in the list box. (The list box is populated by data collected by the ControlPoint Discovery process, which does not go below the site level.) A list- or item-level permissions level can, however, be entered in the **Limit by Other Levels** field.


Limit by Other levels:



- If you want results to include *only* sites for which anonymous access is allowed, check the **Show Anonymous Access Only** box.



- If you want a cumulative total of unique users who have permissions for objects within the selected scope, check the **Calculate Total Users with Permissions** box.



Total Users with Permissions includes:

- Web application Service Accounts
- Users granted permissions through Web application policies
- Site Collection Administrators
- Users within Active Directory groups to which the ControlPoint Service Account has access (that is, within the same domain or forest or in a different domain/forest for which with a two-way trust exists). Disabled Active Directory accounts are included in this total. If an Active Directory user has been renamed but still has permissions in SharePoint under the old name, each name will be counted as a separate user.

Excluded from this total are built-in groups and special accounts, such as nt authority\authenticated users (or any account that begins with "nt authority") and sharepoint\system, and users granted permissions via augmented Claims or alternate authentication providers.

NOTE: If you choose to run the analysis using cached data, Total Users with Permissions uses data recorded in the ControlPoint Administration Database (xcadmin), and is current as of the last Discovery run. (The actual number of users *within Active Directory groups* are always

counted in real-time, however.) If you run the analysis using real-time data, all users are counted in real time, which may significantly increase the amount of time it takes to run the analysis.

Analysis Results Display

All ControlPoint analysis results displays include a standard header and footer, in addition to analysis-specific detail.

Analysis Results Toolbar

ControlPoint analysis results pages include a toolbar which contains page navigation, export, and print capabilities.

Above the toolbar are links that enable you to:

- select all objects in analysis results [to include in a ControlPoint operation](#)
- download results as a CSV file

Analysis Results Detail

The analysis results detail sections contains summary information, followed by the analysis-specific content.

The summary section includes the parameters used, as well as the name of the user who ran the analysis and the run date and time.

Note that, if the analysis was run using cached data, the date and time that the cache was last refreshed via ControlPoint Discovery displays. The information in the analysis is current as of that date and time. If the analysis was run on real-time data, the Cached field will be populated by the value "False."

You can sort line items in analysis detail for any column that includes an up/down arrow.

Analysis Results Footer Information

The analysis footer, which appears on every page of the results, contains the following information:





- the name of the administrator who generated the analysis (which can be useful if results are exported or printed and distributed, since the content of the analysis reflects that administrator's permissions)
- the number of pages in the analysis (you can scroll through multi-page results from the navigation toolbar in the search results header), and
- the date and time when the results were generated.

Selection Summary

The Selection table is repeated at the end of the Results section. This information is included in printed or exported results, as a helpful reminder of the item(s) included in your analysis.

Working with Data Analysis Results

From data analysis results you can perform any of the operations described in the following table.

If you want to ...	Then ...
print analysis results	<p>from the results toolbar:</p> <p>a) Click the print preview icon ()</p> <p>b) Click the print icon ().</p> <p>(Printed results will contain only the data that is currently expanded.)</p>
export analysis results	<p>choose an Export to the selected format option from the drop-down, then click the Export link.</p> <div data-bbox="762 1102 1157 1205"></div> <p>NOTE: If you export to Excel, all data will be exported, regardless of whether it is expanded. If you export to an Acrobat (PDF) file, only data that is currently expanded will be exported.</p>
download raw analysis result data to a CSV file that can be imported into another program for further examination	<p>click the Download as CSV hyperlink in the results toolbar.</p> <div data-bbox="730 1438 1189 1505"></div> <p>This option differs from the csv option in the Export... drop-down in that it provides all of the raw data (including object GUIDs and internal field names, for example) used to create the report. This may be useful for troubleshooting or for more in-depth analysis.</p>
perform a ControlPoint action or analysis within the current workspace	use the procedure for Acting on Search or Data Analysis Results .
return to the results of an analysis from which you drilled-down	click the Back button in the results toolbar.


If you want to ...	Then ...
	

Linking to SharePoint Pages and Other ControlPoint Analyses from Analysis Results


When run interactively*, from the results of most ControlPoint analyses, you can:

- open relevant SharePoint pages
- generate applicable ControlPoint analyses for the same scope and parameters.

Links to SharePoint pages always open in a separate browser window or tab.

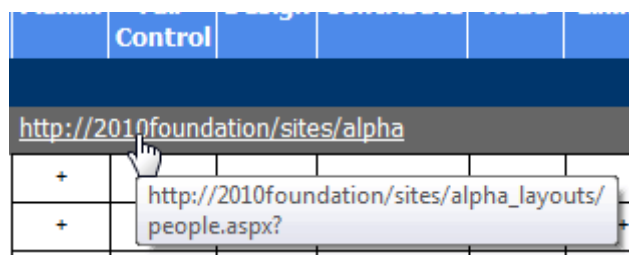

Links to ControlPoint analyses may either open in a separate browser window/tab or in the current workspace, depending on the value of the **Open drill-downs in new window**.

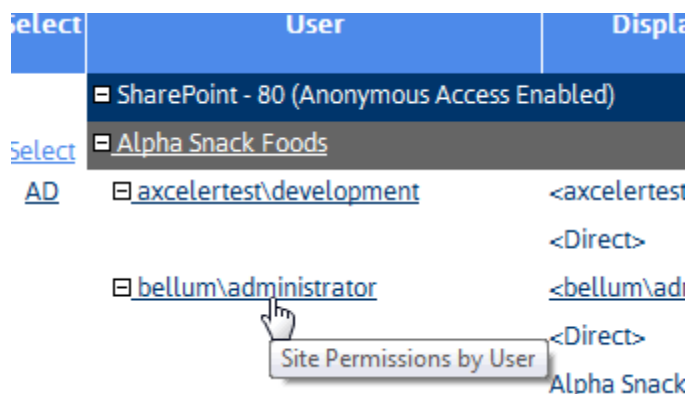

* Generally, these links are not functional in analysis results that have been exported, although in some cases they may be.


Acting on Search or Data Analysis Results

From ControlPoint search or data analysis results, you can open a SharePoint page or initiate a ControlPoint action or another analysis for selected objects.


This feature can facilitate the performance of a variety of administrative tasks. For example, you can generate a Site Permissions analysis to identify the users who have been granted permissions directly, then initiate the appropriate action (such as Add User to SharePoint Group).

To select objects on which to perform a ControlPoint action or analysis:


- 1 Click the **Select** link for the object on which you want to act.

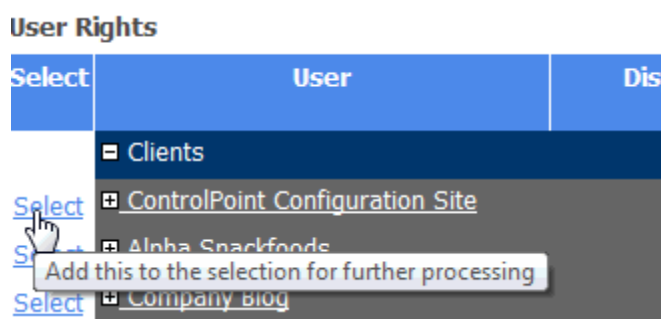



NOTE: To select all objects in the results list, click the **Select All** link in the Results header.

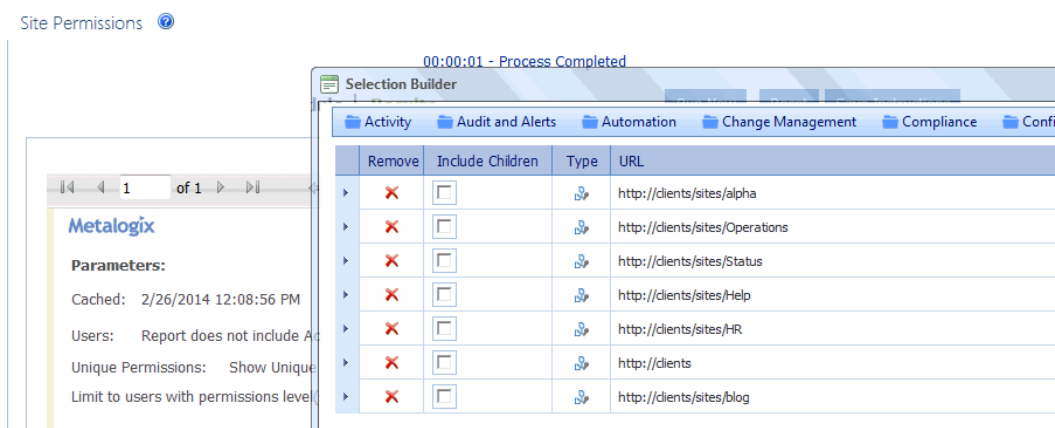



The Selection Builder opens in a separate window.



NOTE: If you want the Selection Builder to remain open in a static location in the browser window, click the Pin On icon () in the upper left corner of the Selection Builder window. To disable this feature, click Pin Off ().

- 2 If you want to select additional objects, either:
 - click the **Select All** link in the analysis results Select column for each additional item you want to add to the Selection Builder.
 OR
 - from within the Selection Builder, use the procedure for [Changing Your Selection](#).
- 3 Choose the applicable SharePoint page or ControlPoint operation from the Selection Builder menu.
 - Note that the rules for selecting objects from the left navigation pane apply here as well. For example, only options that are appropriate for the selected object(s) are available.

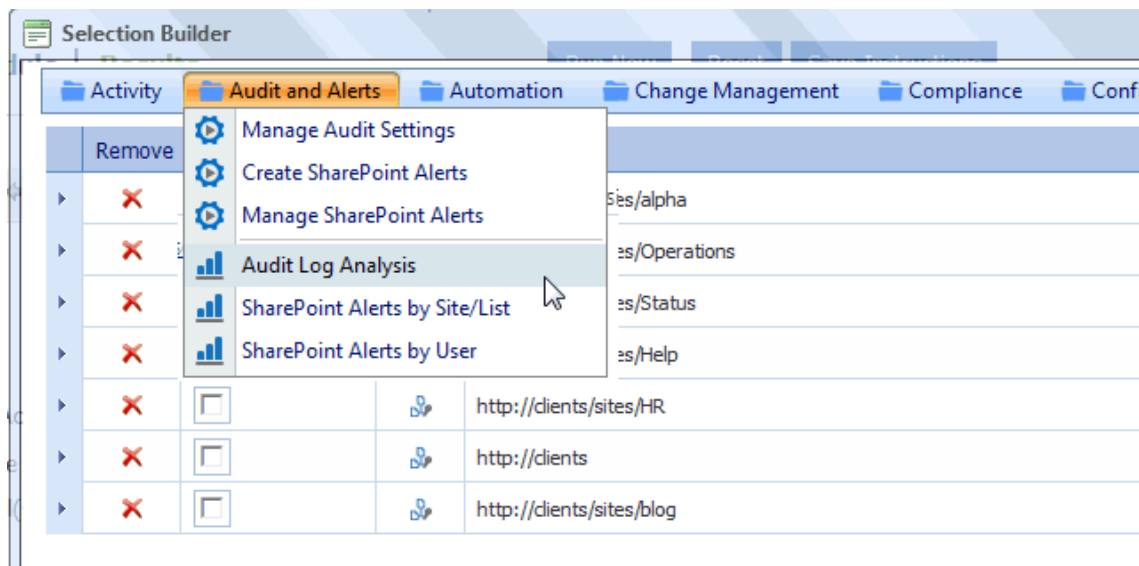

NOTE: The Selection Builder will appear minimized until you click Restore (). If you close the Selection Builder, your current selection(s) will be cleared.

Generating a SharePoint Summary Report

The SharePoint Summary report provides a comprehensive summary of the components (servers, services, Web applications, site collections, and sites) in the SharePoint farm currently being managed in ControlPoint, along with size and usage statistics.


You also have the option of including details about servers in your SharePoint farm—such as storage, performance, and usage statistics—which is collected from Windows Performance Monitor. This option can, however, significantly increase the time it takes to generate the report.

NOTE: For a server's details be included in report results, the ControlPoint Service account must have permissions to request status information from the server. Details can be found in the *ControlPoint Administration Guide*.

To generate a SharePoint Summary report:

- 1 In the SharePoint Hierarchy, select the farm node, then choose **SharePoint Summary**.

- 2 If different from the default values, specify the following parameters for your analysis:

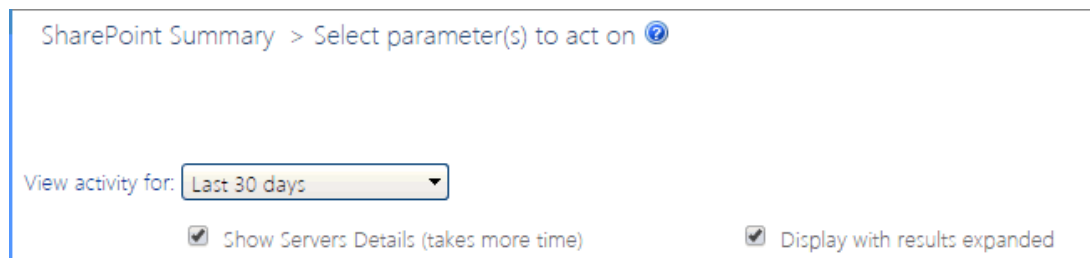

- Select a **View Activity for** date or time period from the drop-down.
- If you want to **Show Servers Details**, check this box.
- If you do *not* want to **Display expanded results**, uncheck the box.

Now you can:


- run the operation immediately (by clicking the [Run Now] button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

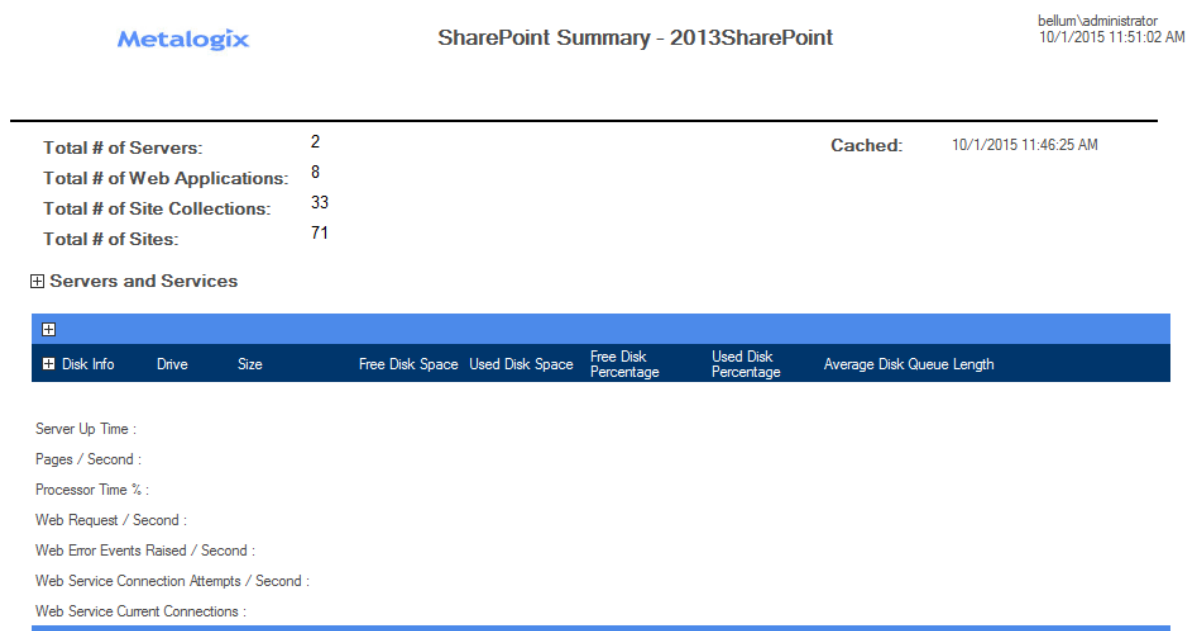

The SharePoint Summary consists of the following sections:

- a summary of farm components
- Servers and Services

- Web Applications

Farm Components Summary

The top of the report displays the total number of servers, Web applications, site collections, and sites in the farm.

Total # of Servers:	2
Total # of Web Applications:	6
Total # of Site Collections:	37
Total # of Sites:	213

Note that the Total # of Sites includes root sites (whereas in the SharePoint Hierarchy, the number that displays in parentheses beside a site collection *excludes* the root site).

Servers and Services

If you chose to Show Servers Details, the Servers and Services section lists all of the servers in the farm, as well as all of the services currently installed on each server. Storage, performance, and usage details also display.

Disk Info	Drive	Size	Free Disk Space	Used Disk Space	Free Disk Percentage	Used Disk Percentage	Average Disk Queue Length
	C:	150.0 GB	20.3 GB	129.7 GB	13.6 %	86.4 %	0.32
Server Up Time :			22 day(s), 7 hour(s), 33minute(s), 56 second(s)				
Pages / Second :			2.87				
Processor Time % :			43.76				
Web Request / Second :			0				
Web Error Events Raised / Second :			0				
Web Service Connection Attempts / Second :			0				
Web Service Current Connections :			10				

NOTE: Information reported varies, depending on the nature of the server. For example, Web Requests are not relevant for a SQL server. Depending on how WMI captures the information, if a statistic is irrelevant for the server, the value will display as either N/A or 0.

Web Applications

In addition to the Web application name and url, the Web Applications section displays the following statistics for each individual Web application, as well as aggregated totals for the entire farm:

- the number of:
 - **Site Collections**
 - **Sites** - which includes root sites and any subsites that have been created

- **Lists** - which includes both user-created (visible) lists and internal (hidden) lists, such as galleries, that are necessary for the functioning of the site, and
 - **Files** - which includes web pages as well as documents
 - **Size, (in MB)** - the total size of the Web application's *content*, which:
 - does not include elements such as metadata, logs, free space, and other overhead
 - is not the disk size of the content database
 - If *all* site collections within a Web application have quotas:
 - **Free Space**
 - **% Usage**
- NOTE: If there are site collections within a Web application that do *not* have quotas set, "N/A" will display in the Free Space and % Usage columns.
- Number of **Requests** for the specified date or date range.

When expanded, the following information about each Web application's content database(s) displays:

- the corresponding IIS application pool and the source account that runs the application pool
- the name of both the content database and the server on which it resides
- the current number of site collections in the database, and
- the maximum number of site collections allowed in the database.

Web Applications (Activity Data is for Last 30 days) **Cumulative hits value, usage reports not available

Web App. / Databases	Collections	Sites	Lists	Files	Size (MB)	Free Space	% Usage	Page Views
<input type="checkbox"/> Clients - http://clients/ [Claims Enabled] Application Pool: SharePoint - 11808 - BELLUM\Administrator WSS_Content_991ca6b7060e4a81b07f55f4c46e164(2010Foundation)	7	9	107	1146	20.73	N/A	N/A	0
<input type="checkbox"/> ControlPoint - http://2010foundation:1818/ Application Pool: ControlPoint - BELLUM\Administrator WSS_CONTENT_AXCELER(2010Foundation)	1	1	14	398	25.14	N/A	N/A	230
<input type="checkbox"/> Customers - 44847 - http://2010foundation:44847/ Application Pool: Customers - 44847 - BELLUM\Administrator WSS_Content_Customers(2010Foundation)	2	4	38	560	7.41	N/A	N/A	21
<input type="checkbox"/> Extranet - http://extranet:28733/ Application Pool: SharePoint - Extranet28733 - BELLUM\Administrator WSS_Content_516d8aac887e4e3780499a4570eb1b4e(2010Foundation)	2	2	33	291	3.51	N/A	N/A	0
<input type="checkbox"/> Intranet - http://2010foundation:40042/ Application Pool: SharePoint - 40042 - BELLUM\Administrator WSS_Content_16df22ac82e14cb9815621195c0ba176(2010Foundation)	4	3	45	511	51.91	N/A	N/A	15
<input type="checkbox"/> New Content DB - http://2010foundation:43571/ Application Pool: SharePoint - 43571 - 2010FOUNDATION\Administrator WSS_Content_3eb24e60f474e24934c7d75f36df65(2010Foundation)	0	0	0	0	0	N/A	N/A	0

Analyzing Activity

ControlPoint offers the following analysis tools that enable you to examine activity within your organization's SharePoint farm for a specific date or time period:

- **Most/Least Activity** analysis lets you examine site collections, sites, users, lists, and list items that have had the most and/or least activity over a specific time period
- **Site Collection Activity Analysis** provides detailed activity statistics for one or more site collections.
- **Site Activity Analysis** provides detailed activity statistics for one or more sites
- **Activity by User** analysis lets you examine specific pages and documents requested by one or more users.
- **Activity by Document** analysis lets you examine request detail for each page and document within one or more sites.
- **Inactive Users** analysis lets you find users who have had no activity for one or more site collections or sites over the past 30 days.

You can also analyze trends in activity over a specified time period. See [Analyzing Trends](#).

IMPORTANT: To generate a *fully-functional* Activity analysis:

Usage Data Collection must be used by all Web applications in the farm.

Variations in Activity Data

Variations in Site Usage Data

Typically, ControlPoint activity analysis data (including Farm Summary and Top Sites) is based on daily request data compiled by SharePoint.

At the site level, this data is normally presented various Usage and Search reports.

You can link directly to the applicable page for your SharePoint environment from ControlPoint Activity Analysis results.

Depending on a number of factors, including the SharePoint variation that you are running and which features are activated in a particular site collection or site, the SharePoint site usage report data may be different from either of those shown in the example above.

For analyses that report *cumulative* monthly activity, data is collected from the SharePoint Search Service.

Analyzing Site Collection Activity

The Site Collection Activity Analysis provides activity statistics for selected site collections, including:

- the distribution of activity among Web applications and site collections selected for analysis, and
- the number of top site collections (that is, site collections within the scope of your analysis with the most activity).

Site Collection Activity analyses use cached data collected by [ControlPoint Discovery](#).

1 Choose **Activity > Site Collection Activity Analysis**.

2 [Specify the parameters for your analysis](#).

Note that, in addition to the "standard" parameters:

- A **Number of Top Sites to show in Graph** must be specified. The value in this field (which is 10 by default, but may be changed) represents the number of site collections with the most activity that you want to examine more closely. These sites are listed in a separate section at the bottom of the analysis Results section.

Number of Top Sites to show in Graph

NOTE: If you want to perform an analysis that focuses exclusively on top site collections that meet specific activity or storage criteria, you can generate a Most/Least Activity Analysis.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis](#).


OR

- [save the operation as XML Instructions that can be run at a later time](#).

Web Applications

Select	Web App.	Collections	Sites	Lists	Avg. Unique
	+ ActivityTest - 6656	10	10	180	
	+ Bolivia - 2856	24	80	1047	
	+ Boston - 22668	12	25	396	
	+ ControlPoint	1	1	19	
	+ SharePoint - 80	3	3	69	
	+ WAP2 - 5074	10	10	180	
Totals		60	129	1891	

Activity Distributions (Top 10)

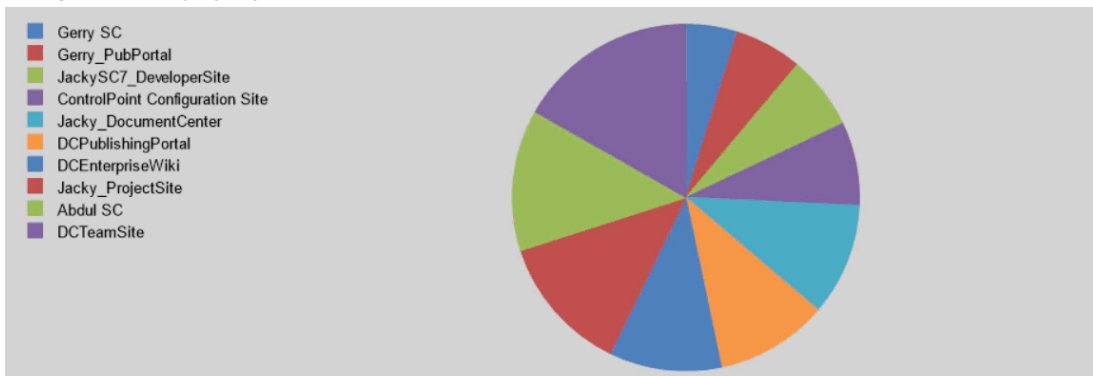

Top 10 Site Collections By Activity

Select	Site Collection	Web App.	Owner
Select	DCTeamSite (http://bos-sp13-b-ss:2856/sites/DCTeamSite)	Bolivia - 2856	Testbench Farm Display
Select	Abdul SC (http://bos-sp13-b-ss:22668/sites/AbdulSC)	Boston - 22668	Testbench Farm Display
Select	Jacky_ProjectSite (http://bos-sp13-b-ss:2856/sites/Jacky_ProjectSite)	Bolivia - 2856	FLS001 Sullivan
Select	DCEnterpriseWiki (http://bos-sp13-b-ss:2856/sites/DCEnterpriseWiki)	Bolivia - 2856	Testbench Farm Display
Select	DCPublishingPortal (http://bos-sp13-b-ss:2856/sites/DCPublishingPortal)	Bolivia - 2856	Testbench Farm Display
Select	Jacky_DocumentCenter (http://bos-sp13-b-ss:2856/sites/Jacky_DocumentCenter)	Bolivia - 2856	Activity User5
Select	ControlPoint Configuration Site (http://bos-sp13-b-ss:1818)	ControlPoint	Testbench Farm Display
Select	JackySC7_DeveloperSite (http://bos-sp13-b-ss:2856/sites/JackySC7_DeveloperSite)	Bolivia - 2856	jacky user5
Select	Gerry_PubPortal (http://bos-sp13-b-ss:22668/sites/Gerry_PubPortal)	Boston - 22668	Testbench Farm Display

The Activity Report displays the following sections:

- **Web Applications**
- **Activity Distribution**
- **Top Site Collections**

Web Applications Section

The Web Applications section lists all of the Web applications within the scope of your analysis, along with the following statistics for individual Web applications, as well as cumulative totals:

- the number of **Collections**, **Sites**, and **Lists** in each Web application

NOTE: The number of Lists includes both user-created (visible) lists and internal (hidden) lists, such as galleries, that are necessary for the functioning of the site. for the specified day or time period.

When expanded, statistics for individual site collections within each Web application displays, including:

- the **site collection name** (with a hyperlink for generating a [ControlPoint Site Activity analysis](#) for the selected site collection/time period.) and *url*
- the number of **Sites** and **Lists** within the collection
- the **Avg. Unique Users/Day** who have visited the site collection for the specified day or time period (That is, any user who has more than one set of permissions to a site is only counted once.)
- the number of **Requests** that the site collection has received for the specified day or time period.
- the date when the site collection was **Last Accessed** (within the date range specified by the analysis).


Select	Web App.	Collections	Sites	Lists	Avg. Unique
	ActivityTest - 6656	10	10	180	
	Bolivia - 2856	24	80	1047	
	Boston - 22668	12	25	396	
Select	Abdul SC (http://bos-sp13-b-ss:22668/sites/AbdulSC)		3	52	1.40
Select	Gerry_PubPortal (http://bos-sp13-b-ss:22668/sites/Gerry_PubPortal)		2	41	0.47
Select	Gerry SC (http://bos-sp13-b-ss:22668/sites/GerrySC)		6	61	0.47
Select	Gerry_Document Center (http://bos-sp13-b-ss:22668/sites/Gerry_Document Center)		2	36	0.23

Some statistics are hyperlinked to relevant SharePoint pages for Usage.

Activity Distribution Section

The Activity Distribution section consists of a pie chart that depicts the distribution of activity among the Web applications returned by your analysis.

Activity Distributions (Top 10)

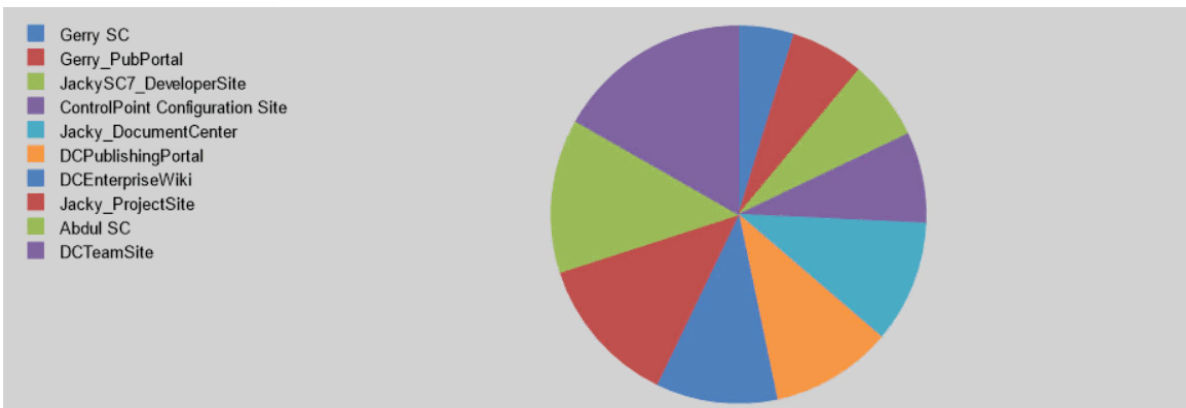

NOTE: If the analysis was generated for a single Web application, the pie chart will show the distribution of activity among site collections within that Web application.

Top Site Collections Section

This section shows statistics for the site collections within the scope of your analysis with the most activity. The number of site collections that displays in this section is determined by the value you entered in the Parameters section for **Limit Display to**.

NOTE: The **Last Accessed** date shows the last time the site collection was accessed *within the date range covered by the analysis*. Any activity that occurred before or after the specified date range will not be reflected in results.

Top 10 Site Collections By Activity

Select	Site Collection	Web App.	Owner
Select	DCTeamSite (http://bos-sp13-b-ss:2856/sites/DCTeamSite)	Bolivia - 2856	Testbench Farm Display
Select	Abdul SC (http://bos-sp13-b-ss:22668/sites/AbdulSC)	Boston - 22668	Testbench Farm Display
Select	Jacky ProjectSite (http://bos-sp13-b-ss:2856/sites/Jacky_ProjectSite)	Bolivia - 2856	FLS001 Sullivan
Select	DCEnterpriseWiki (http://bos-sp13-b-ss:2856/sites/DCEnterpriseWiki)	Bolivia - 2856	Testbench Farm Display
Select	DCPublishingPortal (http://bos-sp13-b-ss:2856/sites/DCPublishingPortal)	Bolivia - 2856	Testbench Farm Display
Select	Jacky DocumentCenter (http://bos-sp13-b-ss:2856/sites/Jacky_DocumentCenter)	Bolivia - 2856	Activity User5
Select	ControlPoint Configuration Site (http://bos-sp13-b-ss:1818)	ControlPoint	Testbench Farm Display
Select	JackySC7_DeveloperSite (http://bos-sp13-b-ss:2856/sites/JackySC7_DeveloperSite)	Bolivia - 2856	jacky user5
Select	Camr PubPortal (http://bos-sp13-b-ss:22668/sites/Camr_PubPortal)	Boston - 22668	Testbench Farm Display

Note that any site collections that have been deleted since ControlPoint Discovery began collecting data will display at the top of results, along with the word "Deleted."

Top 10 Site Collections By Activity							
Select	Site Collection	Web App.	Owner	Sites	Avg. Unique Users/Day	Requests	Last Accessed
	SCGBDeletion - Deleted (http://bos-sp16n-a-ss:5373/sites/SCGBDeletion)	WAP1 - 5373	Testbench Farm Display	0	0.00		10/31/2019

See also [Analyzing Most/Least Activity](#).

Analyzing Site Activity

The Site Activity Analysis provides activity statistics for one or more selected sites, including the distribution of activity among sites within the scope of your analysis. You can report daily activity, which uses data from the SharePoint Usage database as well as monthly activity from the SharePoint Search Service.

To generate a Site Activity Analysis:

- 1 [Select the object\(s\) for which you want to analyze site activity.](#)
- 2 Choose **Activity > Site Activity Analysis**.

- 3 Select either **Show Daily Activity** or **Show Cumulative Monthly Activity**.

☒ Show Daily Activity ☐ Show Cumulative Monthly Activity (relies on use of SharePoint Search Service)

- 4 [Specify additional parameters for your analysis.](#)

Note that, in addition to the "standard" parameters, **Number of Top Sites to show in Graph** must be specified. The value in this field (which is 10 by default, but may be changed) represents the number of pages with the most activity that you want to compare graphically (in the form of a pie chart).

Number of Top Sites to show in Graph

10

The Site Activity Analysis displays the following sections:

- site collections and sites
- Activity Distribution

Site Collections and Sites Section

The site collections and sites section lists the sites within the scope of your analysis, along with the following statistics for the specified day or time period:

- each site and subsite within the scope of your selection
- the site URL
- the **Avg. Unique Users/Day**
- total **Requests** (for daily activity) or cumulative **Hits** (for monthly activity)
- the date or month when the site was **Last Accessed**.

NOTE: For **Daily** activity, the Last Accessed date shows the last day the site was accessed *within the date range covered by the analysis*. For **Monthly** activity, the Last Accessed date shows the last month the site was accessed—as far back as the earliest month in the SharePoint Search Services database—regardless of the date range covered by the analysis.

Daily Activity

Metalogix

Site Activity For (9/11/2019 to 10/10/2019)

acceleratedtestbenchfarm
10/11/2019 9:28:03 AM

Requested Start Date: 9/11/2019 Requested End Date: 10/10/2019

Select	Web Applications / Site	URL	Avg. Unique Users/Day	Requests	Last Accessed
	Boston - 22668			7252	
Select	Abdul SC - Root Site	http://bos-sp13-b-ss-22668/sites/AbdulSC	1.33	1631	10/10/2019
Select	...Abdul SC - Subsite1	http://bos-sp13-b-ss-22668/sites/AbdulSC/Abdul_SC_Subsite1	1.30	1052	10/10/2019
Select	Gerry SC - Root Site	http://bos-sp13-b-ss-22668/sites/GerrySC	0.70	544	10/10/2019
Select	...Abdul Site2	http://bos-sp13-b-ss-22668/sites/AbdulSC/Abdul_Site2	0.96	453	10/10/2019
Select	Gerry SC1 - Root Site	http://bos-sp13-b-ss-22668/sites/Gerry_SC1	0.56	387	10/10/2019
Select	...SubSite0	http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite0	0.59	374	10/10/2019
Select	Gerry SC2 - Root Site	http://bos-sp13-b-ss-22668/sites/Gerry_SC2	0.52	373	10/10/2019
Select	Gerry SC3 - Root Site	http://bos-sp13-b-ss-22668/sites/Gerry_SC3	0.52	371	10/10/2019
Select	...SubSite2	http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite2	0.52	359	10/10/2019
Select	...SubSite3	http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite3	0.52	357	10/10/2019
Select	...SubSite1	http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite1	0.52	276	10/10/2019
Select	...SubSite1	http://bos-sp13-b-ss-22668/sites/Gerry_SC3/SubSite1	0.56	249	10/10/2019
Select	Gerry Enterprise Wiki - Root Site	http://bos-sp13-b-ss-22668/sites/Gerry_EnterpriseWiki	0.52	213	10/10/2019

Monthly Activity

Metalogix

Site Activity For (9/2019 to 10/2019)

acceleratedtestbenchfarm
10/11/2019 9:38:53 AM

Requested Start Month: 9/2019 Requested End Month: 10/2019


Select	Web Applications / Site	URL	Avg. Unique Users/Day	Hits	Last Accessed
	Boston - 22668			892	
Select	Abdul SC - Root Site	http://bos-sp13-b-ss-22668/sites/AbdulSC	7.33	465	10/2019
Select	...Abdul SC - Subsite1	http://bos-sp13-b-ss-22668/sites/AbdulSC/Abdul_SC_Subsite1	6.67	213	10/2019
Select	...Abdul Site2	http://bos-sp13-b-ss-22668/sites/AbdulSC/Abdul_Site2	2.67	81	10/2019
Select	Gerry SC1 - Root Site	http://bos-sp13-b-ss-22668/sites/Gerry_SC1	3.67	36	9/2019
Select	Gerry SC2 - Root Site	http://bos-sp13-b-ss-22668/sites/Gerry_SC2	0.67	24	9/2019
Select	Gerry SC - Root Site	http://bos-sp13-b-ss-22668/sites/GerrySC	3.33	23	10/2019
Select	Gerry SC3 - Root Site	http://bos-sp13-b-ss-22668/sites/Gerry_SC3	2.33	16	9/2019
Select	...SubSite1	http://bos-sp13-b-ss-22668/sites/Gerry_SC3/SubSite1	1	12	9/2019
Select	Gerry Publishing Portal - Root Site	http://bos-sp13-b-ss-22668/sites/Gerry_PublishingPortal	0.67	5	9/2019
Select	Abdul BlogSC - Root Site	http://bos-sp13-b-ss-22668/sites/Abdul_BlogSite	0.33	4	10/2019
Select	...SubSite1	http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite1	0.33	4	9/2019
Select	Gerry Enterprise Wiki - Root Site	http://bos-sp13-b-ss-22668/sites/Gerry_EnterpriseWiki	0.33	3	9/2019
Select	...SubSite0	http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite0	0.33	3	9/2019

Note that the indentation of each site and subsite within a site collection reflect the appropriate hierarchical level.

Activity Distribution Section

The Activity Distribution section consists of a pie chart that depicts the distribution of activity among sites within the scope of your analysis.

Activity Distributions (Top 10)

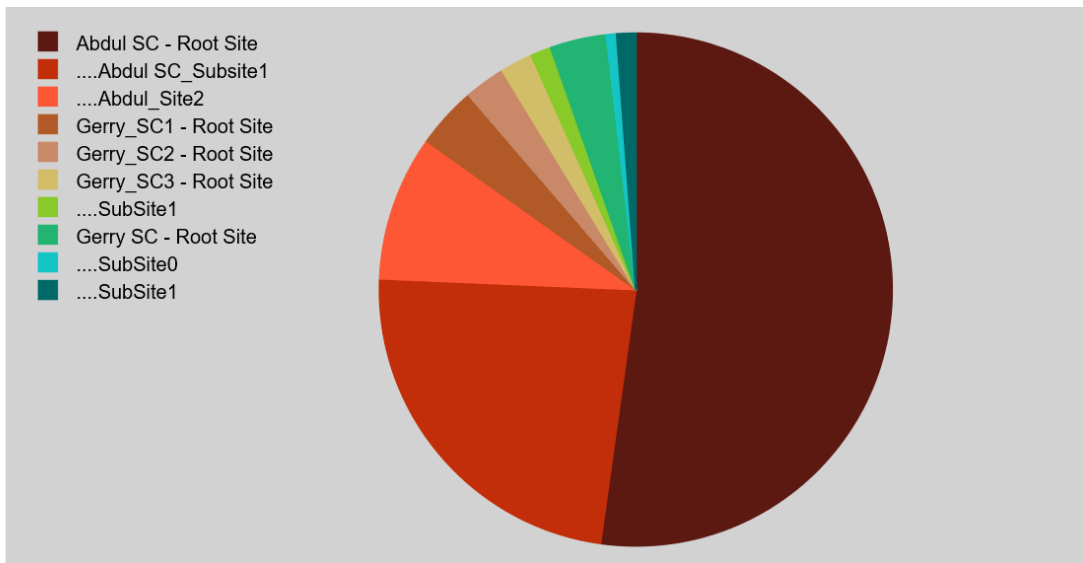

NOTE: If the analysis encompasses only one site, the pie chart will appear solid.

Analyzing Most/Least Activity

Use the ControlPoint Most/Least Activity analysis to examine SharePoint objects within a selected scope and specific date range, ranked according to:

- most or least active site collections and/or sites
- most or least active lists, list items, users, and/or pages.

You can further narrow your result set to include only objects that meet specific criteria and/or thresholds.

NOTE: The SharePoint Search Service is used to collect monthly data (up to 36 months by default but may vary depending on how the Search Service is configured).

To generate a Most/Least Activity analysis:

- 1 [Select the object\(s\) for which you want to analyze most/least activity.](#)
- 2 Choose **Activity > Most/Least Activity**.
- 3 Specify the following parameters for your analysis:
 - a) Select the object types you want to analyze:
 - **Site Collections and Sites**

OR

▪ **Documents, Pages, and Users.**

☒ Site Collections and Sites ☐ Documents, Pages, and Users

Note that remaining parameters are populated based on the object type selected.

- b) If you selected Site Collections and Sites, Select either **Show Daily Activity** or **Show Cumulative Monthly Activity**

☒ Show Daily Activity ☐ Show Cumulative Monthly Activity (relies on use of SharePoint Search Service)

NOTE: If you selected Documents, Pages, and Users, you can only analyze daily activity and this option is unavailable.

- c) From the **Include Report** list box, select the type(s) of activity that you want to include in your analysis.



NOTE: If you choose multiple types of activity, each result set will be displayed in a separate subsection.

- d) If you want results to cover a time period different than the default date range (for Daily, the past 30 days; for Monthly, from the beginning of the past month up to the current day of the current month), specify a different **Start Date** and/or **End Date**.
- 4 If you want to further refine your results, expand the **Advanced Options** panel.

Advanced Options

Limit Site Reports to Site Definitions:

<ALL>

BLOG#0 (Blog)

MPS#1 (Blank Meeting Workspace)

MPS#3 (Social Meeting Workspace)

SGS#0 (Group Work Site)

Limit results to number of Objects:

10

Limit results to number of Requests per Object:

Limit results to objects whose Url Contains:

☒ Use cached data
☐ Open drill-downs in new window

- a) If you want to limit your result set to objects that meet one or more specific criteria, use the information in the following table for guidance.

If you want to limit each results set...	Then ...
to objects with one or more specific site definitions (templates)	select from the Limit Site Reports to Site Definitions list.
to more or less than 10 objects	change the Limit results to number of Objects default value. NOTE: If this field is blank, the default value (10 objects) will be used.
based on number of requests*	enter a number for Number of Requests per Object .
to objects whose url contains a specified text string	enter that string in the Limit results to objects whose URL field. NOTE: If your analysis includes multiple activity types, this limit will apply to each individual result set.
For Documents, Pages, and Users:	
to lists of one or more specific list definitions	select from the List Definitions list.
to exclude lists that do not display in the site's View all Site Content page	check the Omit Hidden Lists box. NOTE: If you choose to include hidden lists in analysis results, they are flagged in analysis results with a plus sign (+).
based on number of items in a list*	enter a number for Limit results to number of List Items per List .

* NOTE: If your analysis includes "most" activity, results will include objects *at or above* that limit; for "least" activity, results will include objects *at or below* that limit.

- b) If your analysis includes site collections, you have chosen to show Daily Activity, and you want to use usage data collected directly from SharePoint rather than the ControlPoint cache, uncheck the **Use cached data** box.

NOTE: Using cached data can significantly reduce the time it takes to generate an analysis on large site collections. Activity at other levels of the hierarchy is always performed in real-time.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The body of the analysis includes a subsection for each usage type.

Daily Activity

Top 10 Sites with Most Activity (9/24/2019 - 10/23/2019)

Parameters:

URL Contains:

Limit Site Reports to Site Definitions: All

Threshold: N/A

Select	Rank	Name	URL	Created By	Size (MB)	Requests	Last Accessed	Last Updated
Select	1	Abdul_SC_Subsite1	(http://bos-sp13-b-ss-22668/sites/AbdulSC/Abdul_SC_Subsite1)	i0#_wlaexcelerest(testbenchfarm	39.10	6749	10/23/2019	10/24/2019
Select	2	Gerry_SC2	(http://bos-sp13-b-ss-22668/sites/Gerry_SC2)	i0#_wlaexcelerest(qbond22	2.24	4590	10/23/2019	10/21/2019
Select	3	Gerry_SC	(http://bos-sp13-b-ss-22668/sites/GerrySC)	i0#_wlaexcelerest(testbenchfarm	95.99	3601	10/23/2019	10/24/2019
Select	4	SubSite3	(http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite3)	i0#_wlaexcelerest(qerry1	0.39	3468	10/23/2019	10/21/2019
Select	5	SubSite1	(http://bos-sp13-b-ss-22668/sites/Gerry_SC3/SubSite1)	i0#_wlaexcelerest(qbond22	1.35	3327	10/23/2019	10/21/2019
Select	6	Abdul_Site2	(http://bos-sp13-b-ss-22668/sites/AbdulSC/Abdul_Site2)	i0#_wlaexcelerest(testbenchfarm	42.75	3209	10/23/2019	10/24/2019
Select	7	SubSite1	(http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite1)	i0#_wlaexcelerest(activity user3	7.81	2940	10/23/2019	10/21/2019
Select	8	Abdul_SC	(http://bos-sp13-b-ss-22668/sites/AbdulSC)	i0#_wlaexcelerest(testbenchfarm	52.26	2633	10/23/2019	10/24/2019
Select	9	SubSite0	(http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite0)	i0#_wlaexcelerest(testbenchfarm	2.95	2344	10/23/2019	10/21/2019
Select	10	Gerry_SC3	(http://bos-sp13-b-ss-22668/sites/Gerry_SC3)	i0#_wlaexcelerest(testbenchfarm	5.53	1959	10/23/2019	10/24/2019

Top 10 Sites with Least Activity (9/24/2019 - 10/23/2019)

Parameters:

URL Contains:

Limit Site Reports to Site Definitions: All

Threshold: N/A

Select	Rank	Name	URL	Created By	Size (MB)	Requests	Last Accessed	Last Updated
Select	1	SubSite1	(http://bos-sp13-b-ss-22668/sites/Gerry_PubPortal/SubSite1)	i0#_wlaexcelerest(testbenchfarm	2.21	187	10/23/2019	10/24/2019
Select	2	Abdul_DocCenter	(http://bos-sp13-b-ss-22668/sites/Abdul_DocCenter)	i0#_wlaexcelerest(testbenchfarm	2.31	275	10/23/2019	10/21/2019
Select	3	Abdul_BlogSC	(http://bos-sp13-b-ss-22668/sites/Abdul_BlogSite)	i0#_wlaexcelerest(testbenchfarm	1.85	299	10/23/2019	10/21/2019

Monthly Activity

Top 10 Sites with Most Activity (9/2019 - 10/2019)

Parameters:

URL Contains:

Limit Site Reports to Site Definitions: All

Threshold: N/A

Select	Rank	Name	URL	Created By	Size (MB)	Requests	Last Month Accessed	Last Month Updated
Select	1	Abdul_SC	(http://bos-sp13-b-ss-22668/sites/AbdulSC)	i0#_wlaexcelerest(testbenchfarm	52.26	490	10/2019	10/2019
Select	2	Abdul_SC_Subsite1	(http://bos-sp13-b-ss-22668/sites/AbdulSC/Abdul_SC_Subsite1)	i0#_wlaexcelerest(testbenchfarm	39.10	231	10/2019	10/2019
Select	3	Abdul_Site2	(http://bos-sp13-b-ss-22668/sites/AbdulSC/Abdul_Site2)	i0#_wlaexcelerest(testbenchfarm	42.75	93	10/2019	10/2019
Select	4	Gerry_SC	(http://bos-sp13-b-ss-22668/sites/GerrySC)	i0#_wlaexcelerest(testbenchfarm	95.99	37	10/2019	10/2019
Select	5	Gerry_SC1	(http://bos-sp13-b-ss-22668/sites/Gerry_SC1)	i0#_wlaexcelerest(testbenchfarm	4.72	36	9/2019	10/2019
Select	6	Gerry_SC2	(http://bos-sp13-b-ss-22668/sites/Gerry_SC2)	i0#_wlaexcelerest(qbond22	2.24	24	9/2019	10/2019
Select	7	Gerry_SC3	(http://bos-sp13-b-ss-22668/sites/Gerry_SC3)	i0#_wlaexcelerest(testbenchfarm	5.53	19	10/2019	10/2019
Select	8	SubSite1	(http://bos-sp13-b-ss-22668/sites/Gerry_SC3/SubSite1)	i0#_wlaexcelerest(qbond22	1.35	12	9/2019	10/2019
Select	9	SubSite1	(http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite1)	i0#_wlaexcelerest(activity user3	7.81	11	10/2019	10/2019
Select	10	SubSite0	(http://bos-sp13-b-ss-22668/sites/GerrySC/SubSite0)	i0#_wlaexcelerest(testbenchfarm	2.95	9	10/2019	10/2019

Top 10 Sites with Least Activity (9/2019 - 10/2019)

Parameters:

URL Contains:

Limit Site Reports to Site Definitions: All

Threshold: N/A

Select	Rank	Name	URL	Created By	Size (MB)	Requests	Last Month Accessed	Last Month Updated
Select	1	Abdul_DocCenter	(http://bos-sp13-b-ss-22668/sites/Abdul_DocCenter)	i0#_wlaexcelerest(testbenchfarm	2.31	0		10/2019
Select	2	Gerry Document Center	(http://bos-sp13-b-ss-22668/sites/Gerry_Document	i0#_wlaexcelerest(qbond33	7.98	0		10/2019

NOTE: For **Daily** activity, the Last Accessed date shows the last day the site was accessed *within the date range covered by the analysis*. For **Monthly** activity, the Last Accessed date shows the last

month the site was accessed—as far back as the earliest month in the SharePoint Search Services database—regardless of the date range covered by the analysis.

Site Collections, Sites, or Users with No Activity

Note that if the number of site collections, sites, or users with no activity exceeds the value you specified for **Limit Display to**, a single line item with the total number with no activity will be returned rather than individual line items.

EXCEPTION: If your analysis includes Site Collections -Least Active and is run using cached (not realtime) data, results will show only site collections with the least amount of actual activity (site collections with no activity will not be included).

Top 10 Sites with Least Activity (9/24/2019 - 10/23/2019)

The number of inactive sites (13) exceeds your threshold - increase the threshold to see the entire list of inactive sites

Parameters:
URL Contains:
Limit Site Reports to Site Definitions: All
Threshold: N/A

Select	Rank	Name	URL	Created By	Size (MB)	Requests	Last Accessed	Last Updated
Select	1	Engineering Department	(http://engineering.acceleratedtest.local:45650)	(0f.wlaacceleratedtestbenchfarm	4.52	0		10/24/2019
Select	2	Host Named SC1	(http://host1.sc1:45650)	(0f.wlaacceleratedtestbenchfarm	3.14	0		10/24/2019
Select	3	Host Named SC2	(http://host2.sc2:45650)	(0f.wlaacceleratedtestbenchfarm	3.14	0		10/24/2019
Select	4	JR-SubSite1	(http://jrac-sp13-a-wfe:45650/sites/SC1/JR-SubSite1)	ACCELERATEDTEST/QAServiceAcct	0.32	0		10/21/2019
Select	5	Marketing Department	(http://marketing.acceleratedtest.local:45650)	(0f.wlaacceleratedtestbenchfarm	1.82	0		10/24/2019
Select	6	Path Based SC1	(http://jrac-sp13-a-wfe:45650/sites/Path_Based_SC1)	(0f.wlaacceleratedtestbenchfarm	3.18	0		10/24/2019

TIP: If you want to see all of the site collections, sites or users with no activity, generate another analysis with **Limit Display to** set to the number shown as the Inactive Count.

Analyzing Activity by User

The Activity by User analysis lets you examine SharePoint pages and documents requested by one or more users.

You can analyze activity over the past 30 days.

You can also use this analysis to identify only files that are currently checked out.

Note About "Common" File Names

Lists of "common file names" and "common file extensions" are maintained in XML file **ActivityByUserOrDoc_ExcludedFileNames_2010.xml** located on the Web front-end server where ControlPoint is installed, in the following **SharePoint hive** subdirectory:
\TEMPLATE\LAYOUTS\Axceler\App_Data.

The purpose of this list is to give you the option of either including or excluding frequently used files from analysis results. You can customize the XML files to include file names specific to your environment. For example, you may want to filter out image files used on many pages that do not reflect actual patterns of user activity. You can also remove any of the default file names provided by

Metalogix.

NOTE: Names in this file will populate the **Exclude File Names** parameter. By default, this file includes SharePoint internal files. When you specify the parameters for your analysis, you can exclude some or all of the file names in this list.

IMPORTANT: Changes that you make to these files must be copied to any additional Web front-end servers in your farm. Also, whenever you install a ControlPoint update or patch, these files are overwritten with files containing the default lists. Therefore, if you choose to make modifications, it is recommended that you keep a backup of the file in a different location so that you can replace the default version after an update or patch.

To generate an Activity by User analysis:

- 1 [Select the object\(s\) on which you want to perform the analysis.](#)
- 2 Choose **Activity > Activity by User**.
- 3 [Specify the parameters for your analysis.](#)

In addition to "standard" parameters (and the ability to exclude files, as described above), you can choose to have analysis results display information about **Checked-out documents only**. Results will include documents that were checked out between the specified start and end date, but have not been checked back in as of the analysis run date. If you select this option and also check **Include Documents with no checked-in version**, only documents that have never been checked in (which may happen, for example, if a document was uploaded but a value was not provided for a required property).

NOTE: If you accept the default (**All Activity**), the **Include Documents with no checked-in version checkbox** will always be ignored.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR


- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you chose to analyze...	Then ...
All Activity	The top level of the analysis displays the following information for each user: <ul style="list-style-type: none">• username (login name) and Display Name

If you chose to analyze...	Then ...																																																
	<ul style="list-style-type: none">for each Web application: the cumulative number of Page Views for all selected site collections within the Web application (as determined by the scope of your selection)for each site collection: the cumulative number of user Requests/Page Views for all of the sites within the site collectionfor each site: the total number of user Requests/page views for pages and documents within the site, andthe total number of requests/page views made by the user. <p>When a site is expanded, a list of all of the documents and pages that the user requested/viewed displays, along with the following information:</p> <ul style="list-style-type: none">the relative url for each page or document, andthe number of requests by the user for each page or document. <table><tr><th>Username</th><th></th><th>Requests</th></tr><tr><td>axceltest1 dcuser1</td><td>dcuser1</td><td>734</td></tr><tr><td colspan="2">Web Application : Bolivia - 2856</td><td>734</td></tr><tr><td colspan="2">Site Collection: Daniel SC</td><td>6</td></tr><tr><td colspan="2">Daniel SC</td><td>6</td></tr><tr><td colspan="2">/sitepages/home.aspx</td><td>6</td></tr><tr><td colspan="2">Site Collection: DCEnterpriseWiki</td><td>716</td></tr><tr><td colspan="2">DCEnterpriseWiki</td><td>710</td></tr><tr><td colspan="2">/</td><td>31</td></tr><tr><td colspan="2">/_api/lists/getbytitle('test1')</td><td>6</td></tr><tr><td colspan="2">/_api/lists/getbytitle('test1')/items</td><td>12</td></tr><tr><td colspan="2">/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='fba_classification_table_06302011-revised.xlsx')</td><td>1</td></tr><tr><td colspan="2">/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='test - copy (5).txt')</td><td>1</td></tr><tr><td colspan="2">/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='usage (4).xlsx')</td><td>1</td></tr><tr><td colspan="2">/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='xc.auditreport (1).pdf')</td><td>1</td></tr><tr><td colspan="2">/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='xc.usagesreport.site (12).pdf')</td><td>1</td></tr></table>	Username		Requests	axceltest1 dcuser1	dcuser1	734	Web Application : Bolivia - 2856		734	Site Collection: Daniel SC		6	Daniel SC		6	/sitepages/home.aspx		6	Site Collection: DCEnterpriseWiki		716	DCEnterpriseWiki		710	/		31	/_api/lists/getbytitle('test1')		6	/_api/lists/getbytitle('test1')/items		12	/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='fba_classification_table_06302011-revised.xlsx')		1	/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='test - copy (5).txt')		1	/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='usage (4).xlsx')		1	/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='xc.auditreport (1).pdf')		1	/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='xc.usagesreport.site (12).pdf')		1
Username		Requests																																															
axceltest1 dcuser1	dcuser1	734																																															
Web Application : Bolivia - 2856		734																																															
Site Collection: Daniel SC		6																																															
Daniel SC		6																																															
/sitepages/home.aspx		6																																															
Site Collection: DCEnterpriseWiki		716																																															
DCEnterpriseWiki		710																																															
/		31																																															
/_api/lists/getbytitle('test1')		6																																															
/_api/lists/getbytitle('test1')/items		12																																															
/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='fba_classification_table_06302011-revised.xlsx')		1																																															
/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='test - copy (5).txt')		1																																															
/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='usage (4).xlsx')		1																																															
/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='xc.auditreport (1).pdf')		1																																															
/_api/lists/getbytitle('test1')/items/getbyid(19)/attachmentfiles/add(filename='xc.usagesreport.site (12).pdf')		1																																															
Checked-out documents only	<p>Analysis results display the following information for each checked out document:</p> <ul style="list-style-type: none">the Document Name (with a link to the ControlPoint Audit Log analysis or the specified date range) <div>NOTE: If SharePoint auditing is not enabled for the check in/check out event, the Audit Log analysis will show No Results to Display.</div> <ul style="list-style-type: none">the URL to the document within the librarythe date and time that the document has been Checked Out Sincethe Last Modified Time																																																

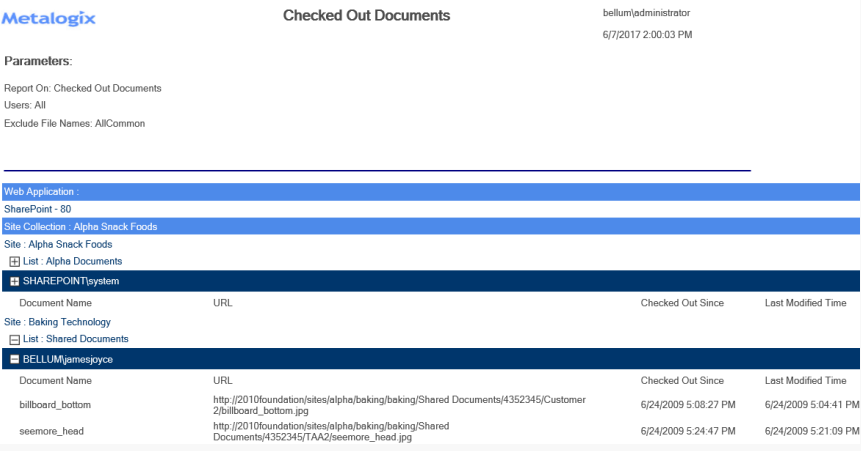If you chose to analyze...	Then ...
	 <p>If you chose to Include Documents with no checked-in version, documents that meet that criteria (if any) will also be included in analysis results, identified by the symbols ##.</p>

Analyzing Activity by Document

The **Activity by Document** analysis lets you examine request detail for each document or page within a selected scope.

You can analyze activity for all SharePoint farms over the past 30 days.

You can also use this analysis to identify only files that are currently checked out. (If you want to identify *all* currently-checked out documents, regardless of date range, use the [Checked Out Documents](#) analysis.)

Note About "Common" File Names

Lists of "common file names" and "common file extensions" are maintained in XML file **ActivityByUserOrDoc_ExcludedFileNames_2010.xml** located on the Web front-end server where ControlPoint is installed, in the following **SharePoint hive** subdirectory:
\TEMPLATE\LAYOUTS\Axceler\App_Data.

The purpose of this list is to give you the option of either including or excluding frequently used files from analysis results. You can customize the XML files to include file names specific to your environment. For example, you may want to filter out image files used on many pages that do not reflect actual patterns of user activity. You can also remove any of the default file names provided by Metalogix.

NOTE: Names in this file will populate the **Exclude File Names** parameter. By default, this file includes SharePoint internal files. When you specify the parameters for your analysis, you can


exclude some or all of the file names in this list.

IMPORTANT: Changes that you make to these files must be copied to any additional Web front-end servers in your farm. Also, whenever you install a ControlPoint update or patch, these files are overwritten with files containing the default lists. Therefore, if you choose to make modifications, it is recommended that you keep a backup of the file in a different location so that you can replace the default version after an update or patch.

To generate an Activity by Document analysis:

- 1 [Select the object\(s\) on which you want to perform the analysis.](#)
- 2 Choose **Activity > Activity by Document**.
- 3 [Specify the parameters for your analysis.](#)

In addition to "standard" parameters (and the ability to exclude files, as described above), you can choose to have analysis results display information about **Checked-out documents only**. Results will include documents that were checked out between the specified start and end date, but have not been checked back in as of the analysis run date. If you select this option and also check **Include Documents with no checked-in version**, documents for which no checked version exists (which may happen, for example, if a document was uploaded but a value was not provided for a required property) will also be included and will be flagged.

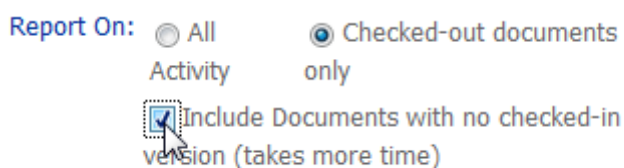

NOTE: If you accept the default (**All Activity**), the **Include Documents with no checked-in version checkbox** will always be ignored.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you chose to analyze...	Then ...
All Activity	The top level of the analysis displays the following information:

If you chose to analyze...	Then ...																																																
	<ul style="list-style-type: none">for each Web application: the cumulative number of Page Views within the Web application (as determined by the scope of your selection)for each site collection: the cumulative number of document or page Requests/Page Views for all of the sites within the site collection, andfor each site: the total number of document or page Requests/Page Views within the site.for each document or page which has had activity: the total Requests/Page Views for that document or page. <p>When a site is expanded, the following information displays for each document/page:</p> <ul style="list-style-type: none">the relative url for the page or Documentthe Username (login name) and Display Name of each user who requested/viewed the document or page, andthe number of Requests/Page Views for each document or page. <table><thead><tr><th>Document\Username</th><th>Display Name</th><th>Requests</th></tr></thead><tbody><tr><td colspan="2">Web Application : Boston - 22668</td><td>6022</td></tr><tr><td colspan="2">Site Collection: Abdul SC</td><td>50</td></tr><tr><td colspan="2">Abdul SC_Subsite1 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_sc_subsite1)</td><td>2</td></tr><tr><td colspan="2">/layouts/15/start.aspx</td><td>2</td></tr><tr><td>gscaleresth.abdultester2</td><td>AbdulTester2</td><td>1</td></tr><tr><td>gscaleresth.abdultester3</td><td>AbdulTester3</td><td>1</td></tr><tr><td colspan="2">Abdul SC_Subsite1 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_sc_subsite1)</td><td>18</td></tr><tr><td colspan="2">/sitepages/home.aspx</td><td>18</td></tr><tr><td>gscaleresth.abdultester2</td><td>AbdulTester2</td><td>6</td></tr><tr><td>gscaleresth.abdultester3</td><td>AbdulTester3</td><td>12</td></tr><tr><td colspan="2">Abdul_Site2 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_site2)</td><td>12</td></tr><tr><td colspan="2">/vsi_bin/client.svc/processquery</td><td>12</td></tr><tr><td>gscaleresth.abdultester4</td><td>AbdulTester4</td><td>6</td></tr><tr><td>gscaleresth.abdultester6</td><td>AbdulTester6</td><td>6</td></tr><tr><td colspan="2">Abdul_Site2 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_site2)</td><td>12</td></tr></tbody></table>	Document\Username	Display Name	Requests	Web Application : Boston - 22668		6022	Site Collection: Abdul SC		50	Abdul SC_Subsite1 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_sc_subsite1)		2	/layouts/15/start.aspx		2	gscaleresth.abdultester2	AbdulTester2	1	gscaleresth.abdultester3	AbdulTester3	1	Abdul SC_Subsite1 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_sc_subsite1)		18	/sitepages/home.aspx		18	gscaleresth.abdultester2	AbdulTester2	6	gscaleresth.abdultester3	AbdulTester3	12	Abdul_Site2 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_site2)		12	/vsi_bin/client.svc/processquery		12	gscaleresth.abdultester4	AbdulTester4	6	gscaleresth.abdultester6	AbdulTester6	6	Abdul_Site2 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_site2)		12
Document\Username	Display Name	Requests																																															
Web Application : Boston - 22668		6022																																															
Site Collection: Abdul SC		50																																															
Abdul SC_Subsite1 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_sc_subsite1)		2																																															
/layouts/15/start.aspx		2																																															
gscaleresth.abdultester2	AbdulTester2	1																																															
gscaleresth.abdultester3	AbdulTester3	1																																															
Abdul SC_Subsite1 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_sc_subsite1)		18																																															
/sitepages/home.aspx		18																																															
gscaleresth.abdultester2	AbdulTester2	6																																															
gscaleresth.abdultester3	AbdulTester3	12																																															
Abdul_Site2 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_site2)		12																																															
/vsi_bin/client.svc/processquery		12																																															
gscaleresth.abdultester4	AbdulTester4	6																																															
gscaleresth.abdultester6	AbdulTester6	6																																															
Abdul_Site2 (http://bos-sp13-b-scs:22668/sites/abdulsc/abdul_site2)		12																																															
Checked-out documents only	<p>Analysis results display the following information for each checked out document:</p> <ul style="list-style-type: none">the Document Name (with a link to the ControlPoint Audit Log analysis for the specified date range) <p>NOTE: If SharePoint auditing is not enabled for the check in/check out event, the Audit Log analysis will show No Results to Display.</p> <ul style="list-style-type: none">the URL to the document within the librarythe date and time that the document has been Checked Out Sincethe Last Modified Time																																																


includes SharePoint internal files. When you specify the parameters for your analysis, you can exclude some or all of the file names in this list.

IMPORTANT: Changes that you make to these files must be copied to any additional Web front-end servers in your farm. Also, whenever you install a ControlPoint update or patch, these files are overwritten with files containing the default lists. Therefore, if you choose to make modifications, it is recommended that you keep a backup of the file in a different location so that you can replace the default version after an update or patch.

To generate a Checked Out Documents analysis:

- 1 [Select the object\(s\) on which you want to perform the analysis.](#)
- 2 Choose **Activity > Checked Out Documents**.
- 3 [Specify the parameters for your analysis.](#)

In addition to "standard" parameters (and the ability to exclude files, as described above), you can choose to **Include Documents with no checked-in version**. When this box is checked, documents for which a checked-in version does not exist (which may happen, for example, if a document was uploaded but a value was not provided for a required property) will also be included in results and will be flagged.



Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

For each user who has checked out documents, analysis results display the following information for each:

- the **Document Name** (with a link to the [ControlPoint Audit Log analysis](#) for the specified date)

NOTE: If SharePoint auditing is not enabled for the check in/check out event, the Audit Log analysis will show No Results to Display.

- the **URL** to the document within the library
- the date and time that the document has been **Checked Out Since**
- the **Last Modified Time**

Parameters:

Report On: Checked Out Documents

Users: All

Exclude File Names: AllCommon

Web Application :

SharePoint - 80

Site Collection : Alpha Snack Foods

Site : Alpha Snack Foods

List : Alpha Documents

SHAREPOINT\system

Document Name	URL	Checked Out Since	Last Modified Time
Site : Baking Technology			
List : Shared Documents			
BELLUM\jamesjoyce			
Document Name	URL	Checked Out Since	Last Modified Time
billboard_bottom	http://2010foundation/sites/alpha/baking/baking/Shared Documents/4352345/Customer 2/billboard_bottom.jpg	6/24/2009 5:08:27 PM	6/24/2009 5:04:41 PM
seemore_head	http://2010foundation/sites/alpha/baking/baking/Shared Documents/4352345/TAA2/seemore_head.jpg	6/24/2009 5:24:47 PM	6/24/2009 5:21:09 PM

If you chose to **Include Documents with no checked-in version**, documents that meet that criteria (if any) will also be included in analysis results, flagged by the symbols ###.

Identifying Inactive Users

The Inactive User analysis identifies users who have had no SharePoint activity for a selected scope and date range.

ControlPoint compiles this list by finding all unique users with permissions then eliminating those with activity within the time period covered by the analysis:

Total Users with Permissions includes:

- Web application Service Accounts
- Users granted permissions through Web application policies
- Site Collection Administrators
- Users within Active Directory groups to which the ControlPoint Service Account has access (that is, within the same domain or forest or in a different domain/forest for which with a two-way trust exists). Disabled Active Directory accounts are included in this total. If an Active Directory user has been renamed but still has permissions in SharePoint under the old name, each name will be counted as a separate user.
- Excluded from this total are built-in groups and special accounts, such as nt authority\authenticated users (or any account that begins with "nt authority") and sharepoint\system, and users granted permissions via augmented Claims or alternate authentication providers.

To generate an Inactive Users analysis:

- 1 [Select the object\(s\) for which you want to find inactive users.](#)

- 2 Choose **Activity > Inactive Users**.
- 3 [Specify the parameters for your analysis](#).

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

Analysis results include:

- a listing of inactive users.

AND

- the total number of:
 - inactive users
 - active users, and
 - users with permissions.

1 of 2
100%
Find | Next

[Download as CSV](#)
[Int](#)

Inactive Users (6/16/2014 to 7/15/2014)
bellum
7/16/20

Among users who currently have permissions

Selection:

Include Children	Type	Name	URL	Path
✓	🏠	2013SharePoint	http://2010foundation:1919/	2013SharePoint

Inactive Users	Display Name
bellum\agathachristie	Agatha Christie
bellum\fscottfitzgerald	FScott Fitzgerald
bellum\haroldpotter	Harold Potter
bellum\hmilller	Henry Miller
bellum\isaacasimov	Isaac Asimov
bellum\jamesjoyce	James Joyce
bellum\margaretmeade	Margaret Meade
bellum\marktwain	Mark Twain
bellum\olivertwist	Oliver Twist
bellum\robertheinlein	Robert Heinlein
bellum\washingtonirving	Washington Irving
bellum\williamshakespeare	William Shakespeare

Inactive Users count: 12
Active Users count: 1
Current Users with Permissions: 32

Analyzing Blog Post Activity

The Blog Post Activity analysis provides activity statistics about blog posts created by SharePoint users over a specified period of time, including the post's author, date published, and the number of unique visitors.

To generate a Blog Post Activity analysis:

- 1 [Select the object\(s\) containing the blog\(s\) whose posts you want to analyze.](#)
- 2 Choose **Activity > Blog Post Activity**.
- 3 [Specify the parameters for your analysis](#)

NOTE: In addition to the "standard" parameters you have the option of grouping results for each blog post **By Post** or **By Author**.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The top level of the analysis shows all of the blog sites within the selected scope. As you drill-down, the following information displays for each post or author (depending on the Group By parameter you chose) within the specified date range:

- **#Comments**
- **Creation Date**
- **Publish Date**
- **#Unique Visitors**
- **# Hits** (that is, the total number of visits to that page).

Author	# Comments	Creation Date	Publish Date	# of Unique Visitors	Hits
.....custm sub 2	http://2010foundation/sites/beta/bravo/custom/custom1/custom2				
.....Deep Thoughts	http://2010foundation/sites/beta/delta/deep				
bellum\jamesjoyce					
Welcome to your Blog!	http://2010foundation/sites/beta/lists/posts/post.aspx?ID=1				
	1	6/5/2015 2:38:09 PM	6/5/2015 2:38:06 PM	1	6
Computer Skills	http://2010foundation/sites/beta/lists/posts/post.aspx?ID=2				
	2	6/5/2015 2:40:40 PM	6/5/2015 2:38:00 PM	2	3
bellum\isaacasimov					
.....A Stitch in Time	http://2010foundation/sites/beta/echo/stitch				
SHAREPOINTsystem					
Welcome to your Blog!	http://2010foundation/sites/beta/lists/posts/post.aspx?ID=1				
	0	6/2/2015 1:10:19 PM	6/2/2015 1:10:14 PM	0	0
Poor Richard says....	http://2010foundation/sites/beta/lists/posts/post.aspx?ID=2				
	2	6/2/2015 1:59:04 PM	6/2/2015 1:57:00 PM	2	8
bellum\isaacasimov					
Wink at small faults	http://2010foundation/sites/beta/lists/posts/post.aspx?ID=3				
	0	6/5/2015 3:56:49 PM	6/5/2015 5:54:00 PM	0	0

Note that SharePoint considers the date and time when the post was initiated (even before the **[Publish]** button was clicked) to be the original Publish Date. Therefore, if the post is published immediately, the Publish Date/time may actually be *earlier* than the Creation Date.

Author	# Comments	Creation Date	Publish Date
.....Deep Thoughts	http://2010foundation/sites/beta/delta/deep		
bellum\jamesjoyce			
Computer Skills	http://2010foundation/sites/beta/lists/posts/post.aspx?ID=2		
	2	6/5/2015 2:40:40 PM	6/5/2015 2:38:00 PM

Blog post that was created and published immediately

If the post was not published immediately (for example, the post was scheduled to be published at a later time or Saved as a Draft), the Publish Date/time will be *later* than the Creation Date/time. If it is saved as a draft, the Publish Date reflects the date and time when the draft was saved. The Publish Date will be updated when the draft is re-saved, published, or scheduled to be published.

Author	# Comments	Creation Date	Publish Date
.....A Stitch in Time	http://2010foundation/sites/beta/echo/stitch		
The Science of Electricity	http://2010foundation/sites/beta/lists/posts/post.aspx?ID=4		
bellum\jamesjoyce	0	6/5/2015 3:59:34 PM	6/5/2015 5:53:00 PM

Blog post that was created and Saved as a Draft

In the case a post for which was scheduled to be published, the **Publish Date** will reflect the scheduled Date/time, even if it is in the future.

Requested Start Date: 5/9/2015

Requested End Date: 6/8/2015

Parameters:

Users: <ALL>

Resume Blog Post Activity

Author	# Comments	Creation Date	Publish Date	# of Unique Visits
..... A Stitch in Time	http://2010foundation/sites/beta/echo/stitch			
Schedule to run 6/8/2015 at 6:00 PM	http://2010foundation/sites/beta/lists/posts/post.aspx?ID=6			
bellum\jamesjoyce	1	6/8/2015 3:37:44 PM	6/8/2015 6:00:00 PM	0

Blog post that was scheduled to be published in the future.


Analyzing Activity by Profile Property

If you are running ControlPoint in a SharePoint Server environment and are using the SharePoint User Profile Service application, you can analyze user activity statistics within Web applications and site collections associated with a specific a Profile Property.

To generate an Activity by Profile Property analysis:

- 1 [Select the Web application\(s\) and/or site collection\(s\) on which you want to perform the analysis.](#)
- 2 Choose **Activity > Activity by Profile Property**.
- 3 [Specify the parameters for your analysis.](#)

In addition to the "standard" parameters, you must **Select Profile Property** for which you want results.

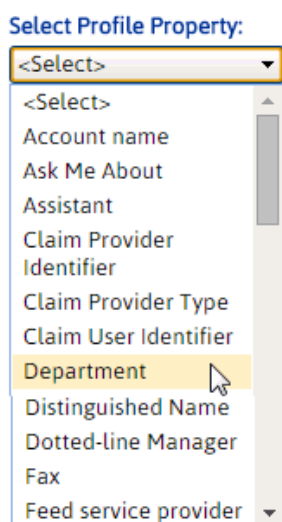

NOTE: The **Select Profile Property** drop-down contains all of the default properties used by the User Profile Service Application(s) within the scope of your analysis. Also included are custom

properties that are public (that is, identified in the profile definition as "Everyone.") Excluded are custom properties that are private (identified in the profile definition as "Just Me").

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Analysis results display all of the sites accessed by users associated with the selected Profile Property/specified date range (grouped by month), along with:

- the **Site** name and **URL**
- the **# of Unique Visitors** associated with the Profile Property
- the **% of Visitors out of total Users** associated with the Profile Property
- the **# of Days the site was accessed** for the month (or the portion of the month represented by the specified the date range).

Metalogix Activity by Profile Property For (3/2/2015 to 5/31/2015) acceleritest\testbenchfarm
6/1/2015 4:34:49 PM

Parameters:
Property Name: Department
Detailed information taken from SharePoint Logging

Month	Site	URL	# of Unique Visitors	% of Visitors out of total Users	# of Days the site was accessed
May, 2015	DC - Department				
	ControlPoint Configuration Site	http://qa2013farm4:1818	1	50%	9
	sc1	http://qa2013farm4:47028	1	100%	2
	SC2	http://qa2013farm4:47028/sites/SC2	1	100%	1
	GB2013TeamSite	http://qa2013farm4:43338/sites/GB2013TeamSite	1	100%	1
	Testbench Farm Display	http://qa2013farm4:33778/tlg/testbenchfarm	1	100%	1
	Root	http://qa2013farm4:3591	1	100%	2
	DocCenter	http://qa2013farm4:3591/sites/DocCenter	1	100%	1
	MaidaSC	http://qa2013farm4:3591/sites/msc	1	100%	3
	Site1 DC	http://qa2013farm4:3591/sites/Site1 DC	1	100%	2
	My Site	http://qa2013farm4/my	1	100%	1

Analyzing Object Properties

ControlPoint lets you view properties for objects at different levels of the SharePoint hierarchy via the following reports:

- **Site Collection Property Report** provides information about one or more site collections in your farm, including the Site Collection Administrator(s), quota details, site collection workflows audit setting that are/are not enabled, and a list of activated/deactivated features

- **Site Property Report** provides information about one or more sites in your farm, including the date and time when the site was created and last updated, the size of the site, users with Full Control permissions, audit settings that are/are not enabled, and a list of activated/deactivated site features
- **List Property Report** provides information about one or more lists in your farm, including the properties of the list, including versioning and advanced settings and audit settings that are/are not enabled for the list.

Analyzing Site Collection Properties

The **Site Collection Properties** analysis provides information about one or more site collections in your farm, for which you are a Site Collection Administrator, including:

- the Site Collection Administrator(s)
- quota details
- site collection workflows
- audit settings that are/are not enabled (with the option of including *only* site collections for which auditing is enabled)
- settings for both SharePoint Designer and audit trimming, and
- a list of site collection features (with the option of including activated features only and/or hidden features).

You can further limit your results to include only site collections for which specific features are activated or deactivated.

To generate a Site Collection Properties analysis:

- 1 [Select the object\(s\) on which you want to perform the analysis.](#)
- 2 Choose **Configuration > Site Collection Properties**.

3 Specify the following parameters for your analysis:

Site Collection Properties > Select parameter(s) to act on 

[Next, select Run Now](#)

Include only collections administered by (blank for all):

Include only collections with quota (MB) greater than (0 for all):

Limit report to site collections with the following features:

Selected Feature(s):
\$Resources:obacore.tenantadminbdcFeatureTitle;
\$Resources:UpgradeOnlyFile_Feature_Title;
Access Services Restricted List Definition
Access Services Shell
Access Services System Objects

☐ Show activated features only
☐ Show hidden features
☒ Display with results expanded

- a) If you want results to **Include only collections administered by** one or more specific users, [select the applicable user\(s\)](#).
- b) If you want to limit results to site collections whose quota exceeds a specific size (in MB), enter that value in the **Include Only Collections with quota >** field.

NOTE: If you accept the default value of 0, all site collections within the scope—including those for which a quota has *not* been set—will be included

- c) If you want to **Show activated features only**, check this box.
- NOTE: If you leave this box unchecked, all installed features will be listed beneath each site collection, and those that are currently activated will be flagged. If you *check* this box, all installed features will be listed once, at the top of the result set, and only activated features will be listed beneath each site collection.
- d) If you want to limit results to site collections for which one or more features are activated/deactivated:
- Select the appropriate option from the **Limit Report to Site Collections with the following features:** drop-down.

Limit report to site collections with the following features:

Selected Feature(s):
Activated
Deactivated

- From the **Selected Feature(s):** list, select the feature(s) you want to include/exclude (you can select multiple features using the **[CTRL]** or **[SHIFT]** key in the conventional manner).

NOTE: If you select multiple features, results will include site collections for which any one or more of those features is activated/deactivated.

- e) If you want to **Include only collections with auditing enabled**, check this box.
- f) If you want to **Show hidden features**, check this box.

NOTE: Hidden features are those that are not visible in the SharePoint Site Features list. (Hidden features are activated from a command line, using custom code, or through the dependency of another feature.)

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)


OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Analysis results list each of the site collections within the scope of your analysis, along with the content database that the site collection uses.



Site Collection Properties

axcelertest\testbenchaxceler
2/28/2014 2:12:35 PM

Parameters:
Activated Features: Show activated features only.
Hidden Features: Show hidden features.
Auditing Enabled: Include collections with auditing disabled or enabled.
Limit report to site collections with the following features:

Clients (http://clients/)	
Alpha Snackfoods (http://clients/sites/alpha)	WSS Content 991ca6b7060e4a81b07ff55fdc46e164
Company Blog (http://clients/sites/blog)	WSS Content 991ca6b7060e4a81b07ff55fdc46e164
ControlPoint Configuration Site (http://clients)	WSS Content 991ca6b7060e4a81b07ff55fdc46e164
Help Desk (http://clients/sites/Help)	WSS Content 991ca6b7060e4a81b07ff55fdc46e164
HR (http://clients/sites/HR)	WSS Content 991ca6b7060e4a81b07ff55fdc46e164
Operations (http://clients/sites/Operations)	WSS Content 991ca6b7060e4a81b07ff55fdc46e164
Status Check (http://clients/sites/Status)	WSS Content 991ca6b7060e4a81b07ff55fdc46e164
Customers - 44847 (http://2010foundation:44847/)	
Extranet (http://extranet:28733/)	
Intranet (http://2010foundation:40042/)	
SharePoint - 80 (http://2010foundation/)	

REMINDER: If you chose to show activated features only, an expandable list of **all Installed Site Collection Features** displays at the top of the result set, with only activated features displaying beneath each site collection. (Otherwise, the full set of installed site collection features will display beneath each site collection).

Installed Site Collection Features

Hidden?	Feature Name
+	Basic Web Parts - Makes the following Web Parts available in the site collection Web Part catalog: Page Viewer, Content Editor, Image, Form, XML and Site Users list.
	Custom Site Collection Help - Creates a Help library that can be used to store custom help for this site collection.
+	Help - Creates the Help library that can be used to store product Help.
	Open Documents in Client Applications by Default - Configures links to documents so they open in client applications instead of Web applications, by default.
	Report Server Integration Feature - Enables rich reporting using Microsoft SQL Server Reporting Services.
+	Standard Column Definitions - Provides standard column definitions for a site collection.
+	Standard Content Type Definitions - Provides standard content type definitions for a site collection.
	Three-state workflow - Use this workflow to track items in a list.

When expanded, the following information displays for each site collection:

- Site Collection Administrators**

Administrators

Primary: i:0#.w|axcelertestjamesjoyce Secondary: i:0#.w|axcelertesttestbenchinstall Others: i:0#.w|axcelertestfscottfitzgerald; i:0#.w|axcelertestwashingtonirving;

- Site Collection Quota** (including the current storage used, % of quota, and the threshold at which a warning email is sent)

Site Collection Quota

Site Collection Storage Maximum : 100 (MB)

Warning email sent when site collection storage reaches : 90 (MB)

Current storage used : 22.76 (MB)

% of Quota : 22.76%

- All of the available **Audit Settings** (settings that are currently enabled are flagged)

Audit Settings

Enabled?	Lists, Libraries and Sites - Events to audit	Enabled?	Documents and Items - Events to audit
+	Editing content types and columns	+	Opening or downloading documents, viewing items in lists, or viewing item properties
	Searching site content		Editing items
+	Editing users and permissions	+	Checking out or checking in items
	Deleting child objects		Moving or copying items to another location in the site
		+	Deleting or restoring items

- Site collection **Workflows**, including each workflow's current status, associations (that is, the number of lists, document libraries, and/or content types associated with the workflow), and the number of instances of the workflow that are in progress.

Workflows

Workflow	Status	Associations	In Progress
Approval	Active	14	1
Collect Feedback	Active	14	4
Collect Signatures	Active	14	0
Disposition Approval	Active	0	0
Three-state	Active	0	0
Translation Management	Active	0	0

- Site collection **Features**. Hidden features (if included) and Activated features are flagged.

Site Collection Features		
Hidden?	Activated?	Feature Name - Description
+	+	Basic Web Parts - Makes the following Web Parts available in the site collection Web Part catalog: Page Viewer, Content Editor, Image, Form, XML and Site Users list.
+	+	BizApps Site Templates - SharePoint Portal site templates and web parts
	+	Collect Signatures Workflow - Gathers signatures needed to complete a Microsoft Office document.
	+	Disposition Approval Workflow - Manages document expiration and retention by allowing participants to decide whether to retain or delete expired documents.
+	+	Excel Services Site Feature - Adds site-level Excel Services Features to the Windows SharePoint Services framework
+	+	InfoPath Forms Services support - InfoPath Forms Services lists and related pages to enable server side rendering of Forms.
+	+	Microsoft Office Server workflows - This feature provides support for Microsoft Office Server workflows.
	+	Office SharePoint Server Enterprise Site Collection features - Features such as the business data catalog, forms services, and Excel Services, included in the Office SharePoint Server Enterprise License
	+	Office SharePoint Server Standard Site Collection features - Features such as user profiles and search, included in the Office SharePoint Server Standard License
+	+	Portal Layouts Feature - Portal feature that uploads all the layouts to the master page gallery
	+	Reporting - Creates reports about information in Windows SharePoint Services.
	+	Routing Workflows - Workflows that send a document for feedback or approval.
+	+	SharePoint Portal Server Business Applications Content Type Definition - SharePoint Portal Server Business Application content type definitions
+	+	SharePoint Portal Server Local Site Directory Capture Control - SharePoint Portal Server Local Site Directory Capture Control
+	+	Site Settings Link to Local Site Directory Settings page. - Site Settings Link to Local Site Directory Settings page.
+	+	SPS Biz Apps Field Definition - OOB field definitions for Biz Apps
+	+	Standard Column Definitions - Provides standard column definitions for a site collection.

- for SharePoint Server farms, **SharePoint Designer Settings** and **Audit Log Trimming Settings**.

SharePoint Designer Settings	
Enabled?	Settings
+	Enable SharePoint Designer
+	Enable Detaching Pages from the Site Definition
+	Enable Customizing Master Pages and Page Layouts
+	Enable Managing of the Web Site URL Structure
Audit Log Trimming Settings	
Value	Settings
+	Trim Audit Log
30	Number of days of Audit Log data to retain
	Location of Audit Log Reports

Analyzing Site Properties

The **Site Properties** analysis provides information about one or more sites in your farm, including:

- the account that created the site as well as the date and time when the site was created and last updated
- the size of the site
- whether the site has unique permissions
- users with Full Control permissions for the site.
- audit settings that are/are not enabled for the site (with the option of including only sites for which auditing has been enabled at the site collection level)
- a list of site features (with the option of including activated features only and/or hidden features)

To generate a Site Properties analysis:

- 1 [Select the object\(s\) you want to include in your analysis.](#)
- 2 Choose **Configuration > Site Properties**.
- 3 Specify the following parameters for your analysis:

Site Properties > Select parameter(s) to act on ⓘ

☐ Show activated features only

Limit report to sites with the following features: Any

Selected Feature(s):

- \$Resources:core.blogContentFeatureTitle;
- \$Resources:core.GbwFeatureWhereaboutsTitle;
- \$Resources:obacore.tenantadminbdcFeatureTitle;
- \$Resources:UpgradeOnlyFile_Feature_Title;
- Academic Library Site
- Academic Library Site Sample Data

☐ Include only sites with auditing enabled at the site or site collection level

☐ Include only sites with auditing enabled at the site level

☒ Display with results expanded

Limit Site Reports to Site Definition

- a) If you want to **Show activated features only**, check this box.

NOTE: If you leave this box unchecked, all installed features will be listed beneath each site, and those that are currently activated will be flagged. If you *check* this box, all installed features will be listed once, at the top of the result set, and only activated features will be listed beneath each site.

- b) If you want to limit results to sites for which one or more features are activated/deactivated:

- Select the appropriate option from the **Limit Report to Sites with the following features:** drop-down.

Limit report to sites with the following features: Any

Selected Feature(s):

- Any
- Activated
- Deactivated

- From the **Selected Feature(s):** list, select the feature(s) you want to include/exclude (you can select multiple features using the [CTRL] or [SHIFT] key in the conventional manner).

NOTE: If you select multiple features, results will include sites for which any one or more of those features has been activated/deactivated.

- c) If you want to **Include hidden features**, check this box.

NOTE: Hidden features are those that are not visible in the SharePoint Site Features list. (Hidden features are activated from a command line, using custom code, or through the dependency of another feature.)

- d) If you want to **Include only sites with auditing enabled at the site collection level**, check this box.

NOTE: If you check this box, results will include sites that inherit audit settings from the parent site collection. See also [Managing Audit Settings](#).

- e) If you want to **Include only sites with auditing enabled at the site level**, check this box.

NOTE: The only audit setting that can be enabled directly for a site is **Opening or downloading documents, viewing items in lists, or viewing item properties** via the ControlPoint action [Manage Audit Settings](#).

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

Site Properties analysis results list each site within the scope of your analysis, along with the content database it uses (from which you can link directly to a [Content Database Storage analysis](#)).

<input type="checkbox"/> SharePoint - 80 (http://2010foundation/)	
<input type="checkbox"/> Alpha Snack Foods (http://2010foundation/sites/alpha)	
Select <input type="checkbox"/> Alpha Snack Foods (http://2010foundation/sites/alpha)	wss content clients
Select <input type="checkbox"/>Baking Technology (http://2010foundation/sites/alpha/baking)	wss content clients
Select <input type="checkbox"/>Herbs and Spices (http://2010foundation/sites/alpha/spices)	wss content clients

REMINDER: If you chose to show activated features only, an expandable list of *all Installed Site Features* displays at the top of the result set, with only activated features displaying beneath each site. (Otherwise, the full set of installed site features will display beneath each site.)

Installed Site Features	
Hidden?	Feature Name
+	\$Resources:core,GbwFeatureWhereaboutsTitle; - \$Resources:core,GbwFeatureWhereaboutsDescription;
+	Announcements Lists - Provides support for announcements lists for a site.
+	Central Administration Links - Links for the Operations and Application Management pages in the Central Administration site.
+	Circulation List - This feature provides support for Circulation list types.
+	Contacts Lists - Provides support for contacts lists for a site.
+	ControlPoint for Site Admins, customizable - This feature adds a link to a customizable ControlPoint screen for Site Administrators onto the Site Settings page and the Site Actions menu
+	ControlPoint Menus for Site Settings - This feature installs a number of ControlPoint menus onto the Site Settings page
+	ControlPoint Permissions Management for Site Admins - This feature adds a link to a customizable ControlPoint Permissions Management screen for Site Administrators onto the Site Settings page and the Site Actions menu
+	Custom Lists - Provides support for custom lists for a site.
+	Data Source Libraries - Provides support for data source libraries for a site.
+	Discussion Lists - Provides support for discussion boards for a site.
+	Document Libraries - Provides support for document libraries for a site.
+	Events Lists - Provides support for events lists for a site.

When expanded, the following information displays for each site:

- the account that the site was **Created By**

- the site's **Size** (in KB)
- the date and time when the site was **Created** and **Last Updated**
- whether the site has **Unique Permissions**
- whether the site has been configured to **Allow RSS Feeds**
- the **Language** used by the site
- a list of users with **Full Control** permissions (that is, users considered to be site Owners).

Select	Alpha Snack Foods (http://2010foundation/sites/alpha)				wss_content_clients		
Created By		Size (KB)	Created	Last Updated	Unique Perm.	Allow RSS Feeds	Language
BELLUMAdministrator		284670.99	11/1/2008 2:23:10 PM	2/27/2014 3:01:13 PM	True	True	English (United States)
Site Template: STS#0 (Team Site)		Description: The best chips around - they go faster than any others					

- All of the available **Audit Settings**, with settings that are currently enabled for the site identified with a plus sign (+). Audit settings that are inherited from the parent site collection are also flagged with >.

Audit Settings (Note: '>' indicates that the audit item is inherited from the parent site collection.)			
Enabled?	Lists, Libraries and Sites - Events to audit	Enabled?	Documents and Items - Events to audit
	Editing content types and columns		Opening or downloading documents, viewing items in lists, or viewing item properties
	Searching site content		Editing items
	Editing users and permissions	>	Checking out or checking in items
	Deleting child objects		Moving or copying items to another location in the site
		>	Deleting or restoring items

- For SharePoint farms running the Managed Metadata Service Application, any [Custom Properties](#) that have been applied to the site.

Custom Properties
CustomPropertyLocation;;Industry Col;;RelCol;;Jan;;

- Site collection **Features**. Hidden features (if included) and Activated features are flagged.

Site Features			
Hidden?	Activated?	Feature Name	Feature Description
+	+	Announcements Lists	Provides support for announcements lists for a site.
+	+	Contacts Lists	Provides support for contacts lists for a site.
+	+	ControlPoint for Site Admins, customizable	This feature adds a link to a customizable ControlPoint screen for Site Administrators onto the Site Settings page and the Site Actions menu
+	+	ControlPoint Menus for Site Settings	This feature installs a number of ControlPoint menus onto the Site Settings page
+	+	ControlPoint Permissions Management for Site Admins	This feature adds a link to a customizable ControlPoint Permissions Management screen for Site Administrators onto the Site Settings page and the Site Actions menu
+	+	Custom Lists	Provides support for custom lists for a site.
+	+	Data Source Libraries	Provides support for data source libraries for a site.
+	+	Discussion Lists	Provides support for discussion boards for a site.
+	+	Document Libraries	Provides support for document libraries for a site.
+	+	Events Lists	Provides support for events lists for a site.
+	+	External Lists	Provides support for external lists for a site.
+	+	Gantt Chart Tasks Lists	Provides support for Gantt-chart tasks lists for a site.
+	+	Grid Lists	Provides support for editing custom lists in a grid for a site.
+	+	Issues Lists	Provides support for issues lists for a site.


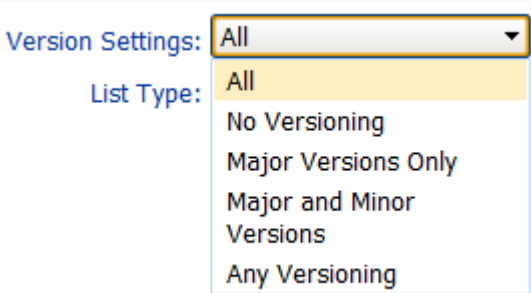
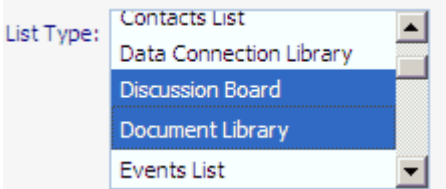
Analyzing List Properties

The **List Properties** analysis provides information about one or more lists in your farm, including:

- the properties of the list, including versioning and advanced settings
- audit settings that are/are not enabled for the list.

To generate a List Properties analysis:

- 1 [Select the object\(s\) you want to include in your analysis.](#)
- 2 Choose **Configuration > List Properties**.
- 3 If you want results to include only lists that meet one or more specific criteria, specify one or more of the parameters described in the following table.

If you want results to include only lists...	Then ...
whose name contains a specific text string	enter the text string in the List Name contains field. 
that have a particular version setting	select from the Versions Setting drop-down. 
of one or more specific types	select from the List Types drop-down. 

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The top level of the analysis lists each Web application, site collection, site, and list within the scope of your analysis, along with the list's **Base Type**.

Metalogix

List Properties

axcelertest\testbenchaxceler
2/28/2014 4:23:05 PM

Parameters:

List Name Contains:

Versioning: All

List Type: All

Web Application: SharePoint - 80

Site Collection: Alpha Snack Foods

Web Site: Alpha Snack Foods

[Select](#) ☐ Activity Reports **Base Type:** DocumentLibrary

[Select](#) ☐ Alpha Documents **Base Type:** DocumentLibrary

[Select](#) ☐ Calendar **Base Type:** Events

[Select](#) ☐ CP Statistics on remote site **Base Type:** 10004

[Select](#) ☐ Form Templates **Base Type:** DocumentLibrary

[Select](#) ☐ Issue Tracking List **Base Type:** IssueTracking

[Select](#) ☐ Links **Base Type:** Links

[Select](#) ☐ Now Hear This! **Base Type:** Announcements

[Select](#) ☐ Shared Documents **Base Type:** DocumentLibrary

[Select](#) ☐ Site Collection Help **Base Type:** 151

[Select](#) ☐ Style Library **Base Type:** DocumentLibrary

[Select](#) ☐ Survey Says! **Base Type:** Survey

When expanded, the following information is displayed for each list:

- list **Properties**, including versioning and advanced settings detail

Properties	
Versioning	
Require Content Approval: False	Minor Version Limit: 0
Version History Type: MajorVersions	Draft Visibility Type: Reader
Major Version Limit: 3	Require Checkout: False
Advanced Settings	
Enable Attachments: False	Allow Management of Content Types: True
Read Permissions: ModifyAll	Display on Quick Launch: True
Write Permissions: ModifyYourOwn	Enable Audience Targeting: False
View Names: Threaded, Flat, Subject, RssView	

- all of the available **Audit Settings**, with settings that are currently enabled for the list identified by a plus sign (+).

NOTE: Audit settings that are inherited from the site collection are flagged with >.

<div> <div></div> <div>Audit Settings</div> </div>		(Note: ' > ' indicates that the audit item is inherited from the parent site collection.)	
Enabled?	Lists, Libraries and Sites - Events to audit	Enabled?	Documents and Items - Events to audit
	Editing content types and columns	+	Opening or downloading documents, viewing items in lists, or viewing item properties
	Searching site content		Editing items
	Editing users and permissions	>	Checking out or checking in items
	Deleting child objects	>	Moving or copying items to another location in the site
		>	Deleting or restoring items

- list **Columns** settings

<div> <div></div> <div>Columns</div> </div>			
Name	Column Type	Column Description	Content Types
Approval Status	Moderation Status	Moderation Status	N/A
Approver Comments	Multiple lines of text	Multiple lines of text	N/A
Attachments	Attachments	Attachments	N/A
Body	Multiple lines of text	Multiple lines of text	Discussion, Message
Body Was Expanded	Computed	Computed	Discussion, Message
Content Type	Single line of text	Single line of text	Discussion, Message
Content Type Id	Content Type Id	Content Type Id	N/A
Copy Source	Single line of text	Single line of text	N/A
Correct Body To Show	Computed	Computed	Discussion, Message
Created	Date and Time	Date and Time	N/A
Created By	Person or Group	Person or Group	N/A
Discussion Subject	Computed	Computed	Discussion, Message
Discussion Title	Lookup	Lookup (information already on this site)	Discussion, Message

Analyzing Storage

ControlPoint offers the following analyses that enable you to examine storage usage for a specific date or time period:

- Most/Least Storage** analysis lets you examine site collections, sites, lists, and list items that are using the most and/or least amount of storage space.
- Site Collection Storage Analysis** shows storage usage for one or more site collections.
- Site Storage Analysis** shows storage usage for sites within one or more site collections.
- Content Database Storage** shows current information about content databases used by site collections in your SharePoint farm.
- Site Lists and Libraries Storage** shows storage usage for each individual page and document within a site.
- Storage by File Type** shows the amount of storage used by file extension.

You can also analyze trends in storage use over a specified time period. See [Analyzing Trends](#).

In addition, the [Duplicate Files Report](#) lets you locate files across lists and libraries in your farm that have the same file name, extension, and relative size. You can use this information to help you free up storage space in content databases.


Analyzing Most/Least Storage

Use the ControlPoint Most/Least Storage analysis to examine SharePoint objects (site collections, sites, lists, and/or list items) within a selected scope ranked according to those using the most or least amount of storage.

You can further narrow your result set to include only objects that meet specific criteria and/or thresholds.

To generate a Most/Least Storage analysis:

- 1 [Select the object\(s\) for which you want to analyze most/least storage.](#)
- 2 Choose **Storage > Most/Least Storage**.
- 3 [Specify the parameters for your analysis:](#)
 - a) Select the object types you want to analyze:
 - **Site Collections and Sites**OR
 - **Lists and Files**Note that remaining parameters are populated based on the object type selected.
 - b) From the **Include Report** list box, select the type(s) of storage that you want to include in your analysis.

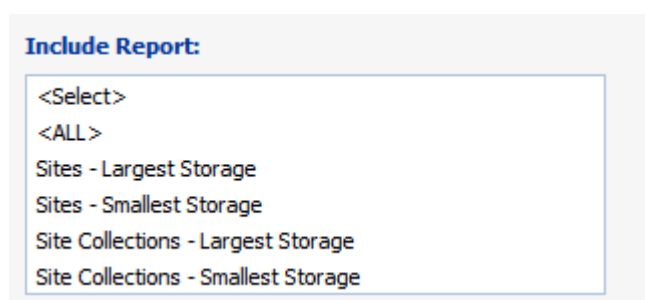

NOTE: If you choose multiple storage types, each result set will be displayed in a separate subsection.

- c) If you want to limit each result set to more or less than 10 objects, change the default value for **Limit Results to number of Objects** field.

NOTE: This field cannot be left blank.

- d) If you want to limit each result set based on the amount of storage used, complete the **Limit results to the amount of Storage used (in MB)** field.

NOTE: If your analysis includes "most" storage, results will include objects *at or above* that limit; for "least" storage, results will include objects *at or below* that limit. If you leave the field blank, no storage size limit will be applied.

- e) If you are reporting on **Lists and Files** and you want to limit each result set based on number of items within a list, complete the **Limit results to number of List Items per List** field.

NOTE: If your analysis includes "most" storage, results will include lists with the specified number of items *or more*; for "least" storage, results will include lists with the specified number of items *or fewer*. If you leave the field blank, no limit will be applied.

- 4 If you want to further refine your results, expand the **Advanced Options** tab.

- a) If you want to limit your result set to objects that meet one or more specific criteria, use the information in the following table for guidance.

If you want to limit each results set...	Then ...
to objects with one or more specific site definitions (templates)	select from the Limit Site Reports to Site Definitions list.
to objects whose url contains a specified text string	enter that string in the Limit results to objects whose URL field. NOTE: If your analysis includes multiple types, this limit will apply to each individual result set.
For Documents, Pages, and Users:	
to lists of one or more specific list definitions	select from the List Definitions list.
to exclude lists that do not display in the site's View all Site Content page	check the Omit Hidden Lists box. NOTE: If you choose to include hidden lists in analysis results, they are flagged in analysis results with a plus sign (+).

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The body of the analysis includes a subsection for each usage type, as shown in the following examples:

Largest and Smallest Storage Used (Sites)

Top 5 Sites with Largest Storage

Parameters:

URL Contains:

Limit Site Reports to Site Definitions: All

Threshold: N/A

Select	Rank	Name	URL	Created By	Size (MB)	Page Views	Last Accessed	Last Updated
Select	1	Alpha Snack Foods	http://2010foundation/sites/alpha	BELLUM\administrator	278.45	233	3/4/2014	3/5/2014
Select	2	CIA	http://2010foundation/sites/CIA	BELLUM\administrator	13.62	0	1/1/0001	2/11/2014
Select	3	Client List	http://2010foundation	BELLUM\administrator	13.26	0	1/1/0001	2/11/2014
Select	4	bravo	http://2010foundation/sites/beta/bravo	SHAREPOINT\system	9.34	0	1/1/0001	10/29/2012
Select	5	Delta Transportation	http://2010foundation/sites/delta	BELLUM\administrator	6.09	91	3/3/2014	3/3/2014

Top 5 Sites with Smallest Storage

Parameters:

URL Contains:

Limit Site Reports to Site Definitions: All

Threshold: N/A

Select	Rank	Name	URL	Created By	Size (MB)	Page Views	Last Updated
Select	1	bravolevelthree	http://2010foundation/sites/beta/bravo/reg/leveltwo/bravolevelthree	SHAREPOINT\system	0.12	0	2/21/2012
Select	2	bravoleveltwo	http://2010foundation/sites/beta/bravo/reg/leveltwo	SHAREPOINT\system	0.12	0	2/21/2012
Select	3	charlie	http://2010foundation/sites/beta/charlie	SHAREPOINT\system	0.22	0	2/21/2012
Select	4	delta	http://2010foundation/sites/beta/delta	SHAREPOINT\system	0.22	1	3/3/2014
Select	5	echo	http://2010foundation/sites/beta/echo	SHAREPOINT\system	0.22	0	2/21/2012

Largest Number of Items (Lists)

Top 5 Lists with Largest Number of Items

Parameters:






URL Contains:

Limit Site Reports to Site Definitions: All

Limit List Reports to List Templates: All

Omit Hidden Lists: True

Threshold: N/A

Select	Rank	Name	Parent Site	Hidden?	Size (MB)	Items	Last Updated
Select	1	 Alpha Documents	http://2010foundation/sites/alpha		145.01	220	3/4/2014
Select	2	 Shared Documents	http://2010foundation/sites/alpha		119.35	150	3/4/2014
Select	3	 xcMostLeastReport Storage Dates	http://2010foundation/sites/alpha		0.05	48	2/13/2014
Select	4	 Shared Documents	http://2010foundation/sites/alpha/baking		3.60	26	7/14/2011
Select	5	 Shared Documents	http://2010foundation/sites/CIA		11.91	26	1/10/2013

Analyzing Site Collection Storage

The Site Collection Storage Analysis provides storage statistics for selected site collections, including:

- the distribution of storage among Web applications selected for analysis, and
- the number of top site collections (that is, site collections with the scope of your analysis using the most storage).

To generate a Site Collection Storage Analysis:


- 1 [Select the object\(s\) on which you want to perform the analysis.](#)
- 2 Choose **Storage > Site Collection Storage Analysis.**
- 3 [Specify the parameters for your analysis.](#)

Note that, in addition to the "standard" parameters, a **Limit display to** must be specified. The value in this field (which is 10 by default, but may be changed), represents the number of sites using the most storage space that you want to examine more closely. These sites are listed in a separate section at the bottom of the analysis results.

Limit display to:

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)
- OR
- [schedule the operation to run at a later time or on a recurring basis.](#)
- OR
- [save the operation as XML Instructions that can be run at a later time.](#)

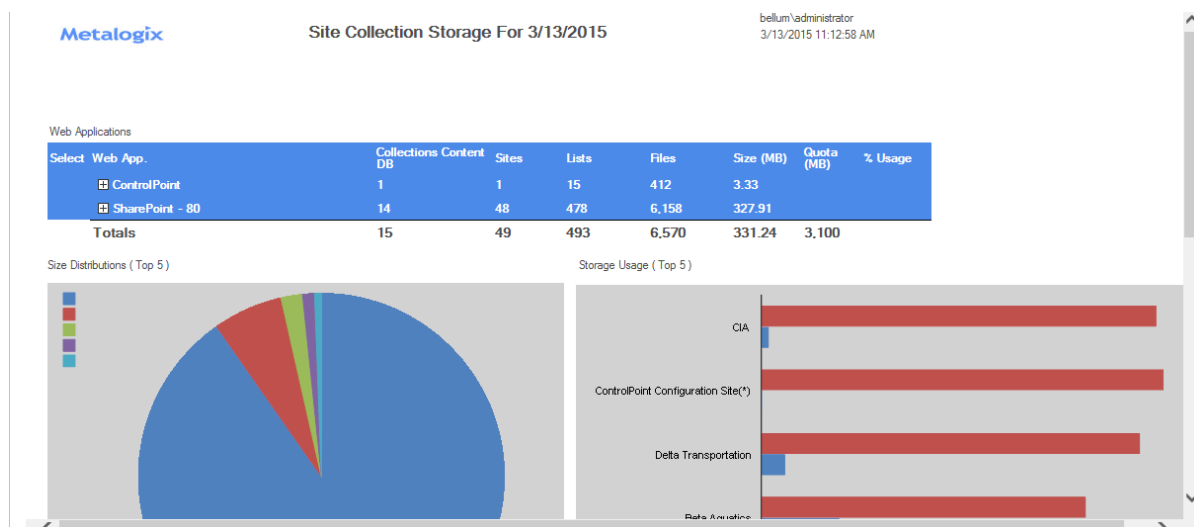

The Site Collection Storage analysis consists of the following sections:

- Web Applications
- Size Distributions
- Storage Usage
- Top Site Collections

Web Applications Section

The Web Applications section lists the Web application(s) within the scope of your analysis, along with the following statistics for individual Web applications and cumulative totals:

- the number of site **Collections**, **Sites**, **Lists**, and **Files**.
- the **Size**, in megabytes (**MB**) of storage used.

NOTE: Size includes content but excludes logs, metadata and other storage overhead. It is not meant to reflect the size of the content database.

When expanded, these statistics display for individual site collections, along with:

- the **Content DB** used by the site collection
- **Quota** in megabytes (**MB**)
- **%Usage** relative to the quota.

Web Applications

Select	Web App.	Collections	Content DB	Sites	Lists	Files	Size (MB)	Quota (MB)	% Usage
	ControlPoint	1		1	15	400	4.53		
Select	ControlPoint Configuration Site (http://2010foundation:1818)		WSS_CONTENT_AXCELER	1	15	400	4.53	0	N/A
	SharePoint - 80	14		48	478	6,158	327.91		
Select	Alpha Snack Foods (http://2010foundation/sites/alpha)		wss_content_clients	8	89	1,529	284.23	0	N/A
Select	Beta Aquatics (http://2010foundation/sites/beta)		wss_content_clients	27	157	1,623	19.42	100	19.42
Select	Delta Transportation (http://2010foundation/sites/delta)		wss_content_clients	1	19	260	5.95	100	5.95
Select	CIA (http://2010foundation/sites/CIA)		wss_content_clients	2	25	310	1.87	100	1.87
Select	Client List (http://2010foundation)		wss_content_clients	1	21	348	1.81	100	1.81
Select	Model Site Collection (http://2010foundation/sites/model)		WSS_Content	1	15	134	1.71	1,000	0.17
Select	Gamma Radiation (http://2010foundation/sites/gamma)		wss_content_clients	1	19	291	1.7	100	1.7
Select	Iota Nanotechnology (http://2010foundation/sites/iota)		wss_content_clients	1	19	238	1.61	100	1.61
Select	Eta Systems (http://2010foundation/sites/Eta)		wss_content_clients	1	19	237	1.61	100	1.61


Size Distributions and Storage Usage Sections

The Size Distributions section consists of a pie chart that depicts the size distribution among the Web applications within the scope of your analysis. (If you generated the report for a single Web application, the chart will appear solid.)


The Storage Usage section consists of a bar chart that shows the amount of storage space used by each Web application relative to the Web application's quota.

NOTE: If a quota has not been set for the Web application, Used Space will not be captured.

Size Distributions (Top 5)

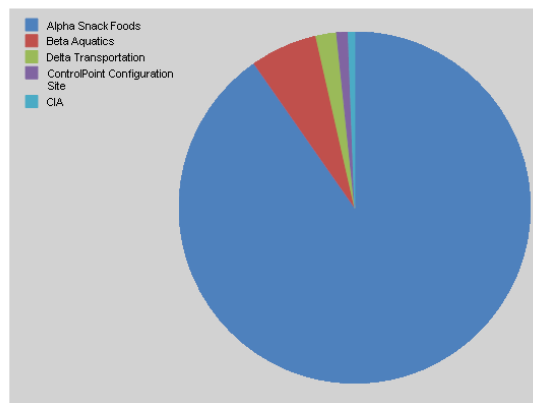

Storage Usage (Top 5)

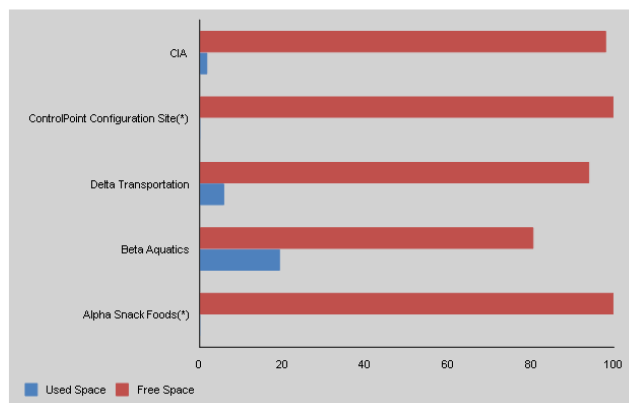

Top Site Collections by Size

This section shows statistics for the site collections using the most storage space. The number of site collections that display in this section is determined by the value you specified for **Limit display to**.

Top 5 Site Collections By Size

(*) Web Application has no Quota

Select	Site Collection	Web Application / Content DB	Owner	Files	Size (MB)	Quota (MB)	% Usage
Select	Alpha Snack Foods (http://2010foundation/sites/alpha)	SharePoint - 80 wss_content_clients	AXCELERTEST\development	1,529	284.23	0	N/A
Select	Beta Aquatics (http://2010foundation/sites/beta)	SharePoint - 80 wss_content_clients	BELLUM\Administrator	1,623	19.42	100	19.42
Select	Delta Transportation (http://2010foundation/sites/delta)	SharePoint - 80 wss_content_clients	BELLUM\Administrator	260	5.95	100	5.95
Select	ControlPoint Configuration Site (http://2010foundation:1818)	ControlPoint WSS_CONTENT_AXCELER	administrator	382	3.33	0	N/A
Select	CIA (http://2010foundation/sites/CIA)	SharePoint - 80 wss_content_clients	BELLUM\Administrator	310	1.87	100	1.87
Totals				4,104	314.8	300	

Analyzing Site Storage

The Site Storage Analysis provides storage statistics for one or more selected sites, including the distribution of storage usage among sites within the scope of your analysis.

To generate a real-time Site Storage analysis:

- 1 [Select the object\(s\) for which you want to analyze site storage.](#)
- 2 Choose **Storage > Site Storage Analysis**.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The Site Storage analysis consists of following sections:

- Sites
- Size Distributions

Site Section

The site section lists the sites within the site collection, along with statistics for

- the number of **Sites**, **Lists** and **Files**
- **Size** in KB
- **% of Quota** set for the site collection that is being used by the site

Metalogix		Site Storage Analysis				hellum\administrator 3/26/2015 4:49:32 PM
Select	Site	Sites	Lists	Files	Size (KB)	% of Quota
	SharePoint - 80					
Select	Alpha Snack Foods - Root Site (http://2010foundation/sites/alpha)	4	34	937	286,167.56	279.46
SelectBaking Technology (http://2010foundation/sites/alpha/baking)	0	8	123	4,296.71	4.20
SelectSkunkworks Project (http://2010foundation/sites/alpha/skunkworks)	2	9	96	5,494.00	5.37
SelectHealthy Foods (http://2010foundation/sites/alpha/skunkworks/healthy)	1	7	48	234.28	0.23
SelectTofu Bars (http://2010foundation/sites/alpha/skunkworks/healthy/tofu)	0	7	48	234.28	0.23
SelectYogurt Covered Pretzels (http://2010foundation/sites/alpha/skunkworks/yogurt)	0	7	48	234.28	0.23
SelectHerbs and Spices (http://2010foundation/sites/alpha/spices)	0	8	109	3,096.07	3.02
SelectStay Fresh Packaging (http://2010foundation/sites/alpha/stayfresh)	0	9	120	2,113.37	2.06
		7	89	1529	301,870.55	

The bottom of this section shows the total number of sites and lists and the combined size of the sites within the scope of your analysis.

r Fresh Packaging /2010foundation/sites/alpha/stayfresh)	0	9	120	2,113.37	2.06
		7	89	1529	301,870.55

Analyzing Storage Used by a Site's Lists, Libraries, and Files

The Site Lists and Libraries Storage analysis lets you view the storage usage of each list, library, and file on a selected site, including all hidden lists (such as Master Page Gallery, Reporting Metadata, and User Information).

You can also open a list, library, or file directly from analysis results.

To generate a Site Lists and Libraries Storage analysis:

- 1 [Select the site for which you want to analyze storage used by lists, libraries, and files.](#)

NOTE: This analysis can only be performed on a single site. If you multi-select, only the site on which you right-clicked will apply.
- 2 Choose **Storage > Site Lists and Libraries Storage**.
- 3 If different than the default (1000), enter **Number of files by size** (that is, files that use the most storage) to display.

The Site Lists and Libraries Storage Analysis consists of the following sections:


- Lists and Libraries
- Files

Lists and Libraries section

The Lists and Libraries section lists all of the lists and libraries within the selected site, along with














- a SharePoint icon identifying the list or library type
- the **Title** of the list or library
- the list or library **Type**
- the number of **Items** in the list or library
- the **URL** (path) to the list or library
- the date and time when the list or library was **Last Updated**

- the **Size** of the list or library in kilobytes (KB)

Metalogix  Site Lists and Libraries Storage bellum\administrator
3/26/2015 5:03:50 PM


Alpha Snack Foods - <http://2010foundation/sites/alpha>
Content Database: wss_content_clients

Lists and Libraries

Title	Type	Items	URL	Versioning	Last Upd.	Size (KB)
 Alpha Documents	Document Library	221	http://2010foundation/sites/alpha/Project Documents/Forms/AllItems.aspx	No	3/7/2014 5:02:39 PM	153733.96
 Shared Documents	Document Library	151	http://2010foundation/sites/alpha/Shared Documents/Forms/AllItems.aspx	No	4/1/2014 12:02:05 PM	123132.22
 Site Collection Help	151	5	http://2010foundation/sites/alpha/Lists/Site Collection Help/Forms/AllItems.aspx	Yes	3/4/2014 11:02:51 AM	3208.57
 Master Page Gallery	Master Pages Gallery	19	http://2010foundation/sites/alpha/_catalogs/masterpage/Forms/AllItems.aspx	Yes	6/27/2013 6:19:06 PM	1171.72
 Now Hear This!	Announcements List	3	http://2010foundation/sites/alpha/Lists/Announcements/AllItems.aspx	Yes	3/4/2014 11:26:28 AM	956.25
 Theme Gallery	123	20	http://2010foundation/sites/alpha/_catalogs/theme/Forms/AllItems.aspx	No	7/26/2010 8:02:35 AM	867.15
 Tasks	Tasks List	6	http://2010foundation/sites/alpha/Lists/Tasks/AllItems.aspx	No	3/5/2014 12:01:47 PM	752.21
 Solution Gallery	121	2	http://2010foundation/sites/alpha/_catalogs/solutions/Forms/AllItems.aspx	No	9/18/2014 3:45:57 PM	630.33
 Web Part Gallery	Web Part Gallery	57	http://2010foundation/sites/alpha/_catalogs/wp/Forms/AllItems.aspx	No	7/14/2011 3:06:09 AM	152.12
 Reporting Templates	Document Library	3	http://2010foundation/sites/alpha/Reporting Templates/Forms/AllItems.aspx	No	9/6/2011 5:52:34 PM	110.72
 Activity Reports	Document Library	1	http://2010foundation/sites/alpha/Activity Reports/Forms/AllItems.aspx	No	5/19/2011 11:38:20 AM	107.45
 Form Templates	Document Library	0	http://2010foundation/sites/alpha/FormServerTemplates/Forms/AllItems.aspx	No	7/14/2011 3:06:08 AM	103.38
 Reporting Metadata	Generic List	22	http://2010foundation/sites/alpha/Lists/Reporting Metadata/AllItems.aspx	No	3/16/2015 1:08:27 AM	94.68

The **Total** number of lists and libraries in the site, as well as the total size of all lists and libraries (excluding Recycling Bin contents) displays at the end of the section.

Note that, as long as a list is visible in SharePoint, you can link to a List Properties analysis for that list by clicking the **Title** hyperlink. If a list is *hidden*, however the hyperlink will not be available.

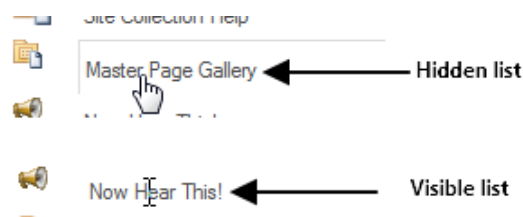

Files section

The Files section lists up to the number of top files that you specified (which may include posted content, templates, aspx files and web parts if applicable), along with the following information:

- a **Title** hyperlink that links directly to the file
- the file **Type**
- the **Directory** in which the file is contained
- the current **Version** number
- if more than one version exists, the **#Old Versions** and the total **Old Version Size (KB)**
- the date and time when the file was **Last Updated**

- the **Total Size** of all versions of the file, in kilobytes (KB).

Files								
Title	Type	Directory	Last Upd.	Version	#Old Versions	Old Versions Size(KB)	Total Size (KB)	
Implementing CP Menus for Site Settings.pdf	pdf	sites/alpha/Shared Documents	11/4/2008 11:02 PM	N/A			166.43	
Davinci Before you Begin.pdf	pdf	sites/alpha/Shared Documents/Davinci_2_3_7	7/13/2012 9:19 PM	N/A			166.38	
Policy screenshots.docx	docx	sites/alpha/Shared Documents	12/15/2011 11:58 PM	N/A			162.86	
xcrRightsByUserSite.pdf	pdf	sites/alpha/Lists/Attachments/2	1/6/2011 4:11 PM	N/A			152.31	
xcrSummaryReport2011-03-03 18.00.31.pdf	pdf	sites/alpha/Project Documents	3/3/2011 11:01 PM	N/A			151.62	
xcrSummaryReport2011-03-03 19.00.30.pdf	pdf	sites/alpha/Project Documents	3/4/2011 12:01 AM	N/A			151.39	
ParallelProcs Settings.pdf	pdf	sites/alpha/Lists/Site Collection Help	3/4/2014 4:02 PM	1.0			127.76	
Setup ControlPoint for Claims .docx	docx	sites/alpha/Shared Documents	7/10/2012 4:13 PM	N/A			122.08	
PeopleSearchResults.aspx	aspx	sites/alpha/_catalogs/masterpage	1/1/2008 4:17 PM	12.0	11	109.28	119.21	
SearchResults.aspx	aspx	sites/alpha/_catalogs/masterpage	1/1/2008 4:17 PM	12.0	11	96.39	113.70	
Davinci Migrator for SharePoint 2010 Installation	docx	sites/alpha/Shared Documents	8/3/2011 11:43 PM	N/A			112.49	

The **Total** number of files (up to the limit specified in the **Number of files by size** parameter), as well as the total size of all files, displays at the end of the section.

1_000	000	sites/Target/_catalogs/design	1/10/2014 9:42 PM	N/A		0.20
3_000	000	sites/Target/Lists/Categories	1/10/2014 9:43 PM	N/A		0.18
1_000	000	sites/Target/Lists/Categories	1/10/2014 9:43 PM	N/A		0.18
2_000	000	sites/Target/Lists/Categories	1/10/2014 9:43 PM	N/A		0.18
Total: 371						1,827.81

Page 10 of 10

1/13/2014 12:17:17 PM

Analyzing Storage Used by Content Databases

The **Content Databases Storage** analysis provides current information about content databases used in your SharePoint farm, including:

- the Web application with which the database is associated
- the database's size, status, and the maximum number of sites allowed
- storage used by the database, the log file, and the audit log
- each of the site collections, sites, lists, and files that use the database.

To generate a Content Databases storage analysis:

- [Select the object\(s\) for which you want to analyze content database storage.](#)
- Choose **Storage > Content Database Storage**.
- [Specify the parameters for your analysis.](#)

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Content Database Storage Analysis Results

The top level of the analysis lists the Web application(s) within the selected scope, the associated content database(s) along with the following information:

- **Data File Size**
- **Data File Space Used**
- the database's **Log File Size**
- the **Log File Space Used**
- the **Audit Log Size** (in MB)
- the database's **Status**, which may be:
 - Online
 - Disabled
 - Offline
 - Unprovisioning
 - Provisioning
 - Upgrading

(Consult your SharePoint documentation for status definitions)
- the **Current # of Sites** using the database
- the number of sites that can use the database before a **Site Level Warning** is generated
- the **Max # of Sites** that can use the database

Analyzing Storage by File Type

The Storage by File Type analysis provides both a graphical and tabular representation of the amount of storage used by various file types in the content database(s), both by file size and count. You have the option of including all file types, or including/excluding those with specified file extensions.

You can also drill down to a [Most/Least Storage Analysis](#) for a selected file type, to view files using the largest amount of storage.

NOTE: This analysis encompasses files within SharePoint content databases. Files stored within the file system, such as SharePoint Features, are not included.

To generate a Storage by File Type analysis:

1 [Select the object\(s\) you want to include in your analysis.](#)

2 Choose **Storage > Storage by File Type**.

3 Specify the following parameters for your analysis:

If you want include or exclude specific file types:

- Specify whether you want to **Include Extensions** or **Exclude Extensions**.
- Enter the file extension(s) you want to include or exclude in the **File Extensions** field. Enter multiple extensions as a comma-separated list.

Storage by File Type > Select parameter(s) to act on ⓘ

☒ Include Extensions ☐ Exclude Extensions

File extensions (',' separated list):

Number of files to show in drill-down:

NOTE: If you want include *all* file types, leave the File Extensions field blank. If you chose Exclude Extensions, you must enter at least one file extension.

For **Number of files to show in drill-down**, enter the number of files that use the most amount of storage upon drilling down to an analysis for a selected file type.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)


Analysis results include:

- two pie charts that depict the **Storage by File Size** and **Storage by Type** for the selected scope and file types.


Parameters:

File types included: doc,docx,pdf

Storage by File Size

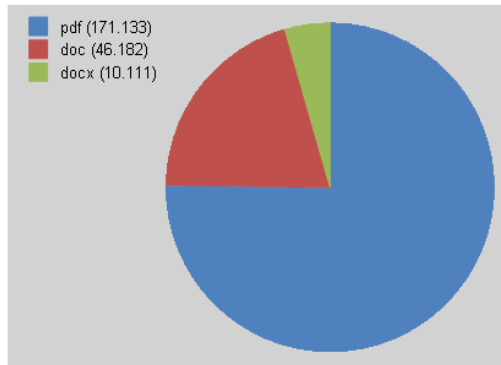

Storage by File Count

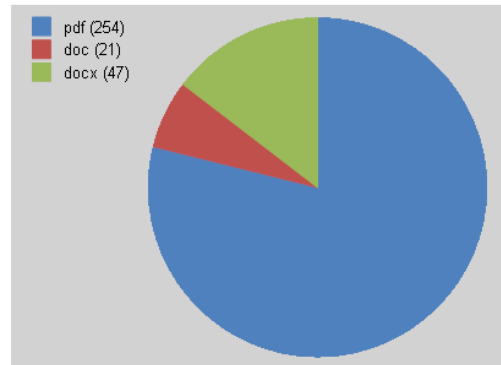

- a listing that includes the **Extension(s)**, **Total Files** and **Total Size (MB)** for each file type. Click an Extension(s) hyperlink to generate a [Most/Least Storage analysis](#) that shows the files with that extension that use the most storage (the number of which was specified in the **Number of Files to Show in Drill-down**).

Extension(s)	Total Files	Total Size (Mb)
pdf	254	171.133
doc	21	46.182
docx	47	10.111

Analyzing Content of Recycle Bins

The Recycle Bin Report lets you examine the contents of Recycle Bins for one or more site collections in your SharePoint farm.

To generate a Recycle Bin Report:

- [Select the object\(s\) on which you want to perform the analysis.](#)
- Choose **Storage > Recycle Bins**.
- Specify whether or not you want to **Display with results expanded**.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The top level of analysis results lists:




- the Web application(s) within the scope of your analysis that contain Recycle Bin items
- the site collection containing the recycle bin items
- the total size of the items in all recycle bins.

When expanded, the following additional information displays:

- the Recycle Bin for each site collection within the scope of your analysis, along with the size (in KB) of all of the items contained within it
- for each item in a Recycle Bin:
 - an icon that represents the file **Type**
 - the **Title** of the item
 - the **Directory** from which the item was deleted
 - the user account that the item was **Created by**
 - the user account that the item was **Deleted By**
 - the date the item was **Deleted On**
 - the **Size** of the item in kilobytes (**KB**):

Metalogix **Recycle Bins** bellum\administrator
3/26/2015 6:55:06 PM

Scope: SITE : Alpha Snack Foods

Type	Title	Directory	Created By	Deleted By	Deleted On	Size (KB)
Web Application : SharePoint - 80						52314.46
End User Recycle Bin Items for:Stay Fresh Packaging (http://2010foundation/sites/alpha/stayfresh) - SharePoint - 80 / 2010Foundation						
	Don-Quixote-C10016007.jpg	sites/alpha/skunkworks/Shared Documents	Mark Twain	System Account	3/26/2015 10:54:32 PM	24.12
End User Recycle Bin Items for:Skunkworks Project (http://2010foundation/sites/alpha/skunkworks) - SharePoint - 80 / 2010Foundation						
	Axceler.jpg	sites/alpha/skunkworks/Shared Documents	Mark Twain	System Account	3/26/2015 10:54:32 PM	8.79
	Axceler_X_pms376_expanded.jpg	sites/alpha/skunkworks/Shared Documents	Mark Twain	System Account	3/26/2015 10:54:32 PM	12.32
End User Recycle Bin Items for: Alpha Snack Foods (http://2010foundation/sites/alpha) - SharePoint - 80 / 2010Foundation						52269.23

Finding Duplicate Files

The **Duplicate Files Report** lets you to locate files across lists and libraries in your farm that have the same file name, extension, and relative size. You may want to use the information in this report to help you free up storage space in content databases.

Note About "Common" File Names and Extensions

Lists of "common file names" and "common file extensions" are maintained in XML files located on the Web front-end server where ControlPoint is installed, in the following **SharePoint hive** subdirectory:
\TEMPLATE\LAYOUTS\Axceler\App_Data.

The purpose of these lists is to give you the option of either including or excluding frequently used files from analysis results. You can customize the XML files to include file names and extensions specific to your environment. For example, you may want to filter out company-specific files that are in multiple document libraries by design. You can also remove any of the default names and extensions.






Files containing common file names and extensions are described in the following table.


File	Description
DuplicateFiles_CommonFileNames_Wildcards.xml	<p>Names in this file will be added to the Include File Extensions only parameter.</p> <p>By default, this file includes the entry *.000, which gives you the option of excluding SharePoint temporary files from results.</p> <p>You can specify additional wildcards that you can exclude from analysis results. Enter wildcards in one of the following formats:</p> <ul style="list-style-type: none"> • <i>*name</i> • <i>name*</i> • <i>*name*</i> <p>Examples:</p> <ul style="list-style-type: none"> • <i>*.aspx</i> • <i>template.*</i> • <i>*page*</i>
DuplicateFiles_Extensions.xml	<p>By default, this file includes both file extensions associated with SharePoint templates and many common file formats, allowing you to filter results to include files with specific extensions.</p> <p>NOTE: This file is shared with the Storage by File type.</p>

Changes that you make to these files must be copied to any additional Web front-end servers in your farm. Also, whenever you install a ControlPoint update or patch, these files are overwritten with files containing the default lists. Therefore, if you choose to make modifications, it is recommended that you keep a backup of the file in a different location so that you can replace the default version after an update or patch.

To generate a Duplicate Files Report:

- 1 [Select the object\(s\) for which you want to find duplicate files.](#)
- 2 Choose **Storage > Duplicate Files**.
- 3 Specify one or more parameters for your analysis. Use the information in the following table for guidance.

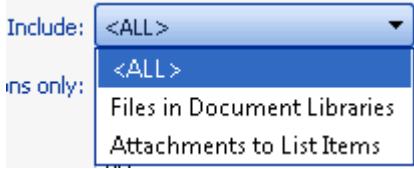If you want to ...	Then ...
include only files that are <i>either</i> Files in Document Libraries or Attachments to List Items	<p>select the appropriate option from the Include drop-down</p> 
include only files with specific file extensions	<p>select from the Include File Extensions only list box. (You can select multiple items using the [Shift] and [Ctrl] keys in the conventional manner.)</p>  <p>REMINDER: This list is populated by DuplicateFiles_Extensions.xml, located in the SharePoint hive subdirectory: \TEMPLATE\LAYOUTS\Axceler\App_Data.</p>
include only files whose name include a particular text string	<p>enter the text string in the File Name Contains field.</p> 
include only duplicate files of which there are more than two (2) instance	<p>change the default value for Minimum Number of Duplicates. For example, if you enter 3, results will include only files for which three or more instances exist.</p> 
consider files whose size varies within a specified percentage to be "duplicates"	<p>specify a File Size Matching Threshold (%)</p>  <p>NOTE: The default value of 5% is intended to take into account variations in metadata and version histories that may be found in files that otherwise have exactly the same content (this often occurs with Microsoft Office files, for instance). Changes in file size can occur when they are uploaded to SharePoint. If you want all files with the same file name and type to be included, regardless of size, enter 0.</p>

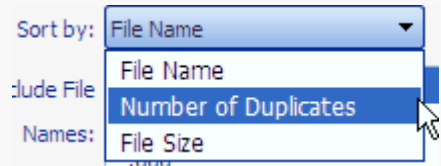If you want to ...	Then ...
sort results by Number of Duplicates or File Size	<p>select the appropriate option from the Sort By drop-down.</p>  <p>By default, results are sorted by File Size..</p>

Now you can:

- run the operation immediately (by clicking the [**Run Now**] button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Analysis results include all duplicate files that meet the criteria of your analysis, along with the following information:

- **File Name**
- **Average Size (MB)**
- **Number of Duplicates**

When expanded, the following additional information displays for each group of duplicate files:

- The **URL** for the list or library where each file is located
- The **Size (MB)** of each file
- The **File Version Number**

NOTE: If versioning is not enabled for a document library or if the file is an attachment to a list, the version number will always display as 1.0.

- The user the file was last **Modified By**.

Metalogix

Duplicate Files

bellum\administrator
3/26/2015 7:01:26 PM

Parameters:
Include: Files in Document Libraries
Minimum Number of Duplicates: 2
File Name Contains:
Include File Extensions only: All

Sort by: File Name
File Size Matching Threshold (%): 5
Exclude File Names: AllCommon

File Name	Average Size (MB)	Number of Duplicates	URL	Size (MB)	File Version Number	Last Modified	Modified By
<input type="checkbox"/> Active Directory Facts.docx	0.022	2					
			http://2010foundation/sites/alpha/Shared Document	0.021	1.0	2/3/2009 6:30:00 PM	System Account (SHAREPOINT\system)
			http://2010foundation/sites/beta/Shared Documents	0.022	0.1	3/3/2014 2:10:32 PM	Margaret Meade (i:\0#\w\accelerest\margaretmeade)
<input type="checkbox"/> ControlPoint Configuration and Troubleshooting Guide.doc	0.826	2					
			http://2010foundation/sites/alpha/Shared Document	0.826	1.0	1/9/2013 5:55:59 PM	System Account (SHAREPOINT\system)
			http://2010foundation/sites/alpha/Project Document:	0.826	1.0	1/9/2013 5:59:29 PM	System Account (SHAREPOINT\system)
<input type="checkbox"/> ControlPoint Permissions Management for Site Admins.pdf	1.581	2					
			http://2010foundation/sites/alpha/Shared Document	1.601	1.0	11/27/2012 12:40:26 AM	System Account (SHAREPOINT\system)
			http://2010foundation/sites/alpha/Lists/Site Collectio Help	1.561	N/A	3/4/2014 10:57:15 AM	FScott Fitzgerald (FScott Fitzgerald)
<input type="checkbox"/> ControlPoint v_4_7 Installation and Upgrade	0.218	2					

NOTE: The **Number of Duplicates** represents the total number of files found. The **URL** column lists those for which you have permissions.

Analyzing Content

ControlPoint provides the following tools for analyzing site content:

- The **Metadata Usage** analysis shows where and how Managed Metadata is used in SharePoint Server farms
- The **Content Types** analysis shows properties and usage details of SharePoint content types.
- The **Recycle Bin Report** lets you examine the contents of recycle bins for one or more site collections.
- The **Web Parts** analysis include detailed statistics about Web Parts used in selected sites.

You can also analyze [trends in site count over a specified time period](#).

Analyzing Managed Metadata Usage

The Metadata Usage analysis lets you analyze the use of managed metadata as list/library columns in your SharePointServer environment. You can group results by site or by term set and you have the option to Include usage count and the individual items in lists or libraries that use the metadata.

NOTE: Because it relies on data from the Managed Metadata Service that is only available in the Server version of SharePoint this analysis is not available for SharePoint Foundation.

To generate a Managed Metadata Usage analysis:

- 1 [Select the object\(s\) whose managed metadata usage you want to analyze](#).

2 Choose Content > Managed Metadata Usage.

3 Specify the parameters for your analysis. Use the information in the following table for guidance.

Managed Metadata Usage > Select parameter(s) to act on ⓘ

Show only Metadata of TermSets/Terms containing (',' separated list)

Select by ☒ TermSet ☐ Term

☐ Show item usage count ☐ Show items in list or library (takes more time)

☒ Display with results expanded ☒ Group by Site (uncheck to group results by TermSet)

If you ...	Then ...
want results to include only metadata with term sets OR terms that contain a specific text string	<ul style="list-style-type: none">enter the string in Show only Metadata of TermSets/Terms containing field. <div>NOTE: You can enter multiple text strings as a comma-separated list.</div>choose the applicable Select by option (to indicate whether you want ControlPoint to search for TermSet or Term)
want results to include the <i>number of</i> list items that have a value in the column that uses the metadata	check the Show item usage count box.
want results to include the actual list items that have a value in the column that uses the metadata	check the Show items in list or library box. <div>NOTE: If you check this box, ControlPoint must iterate through all list items. Depending on the scope of your analysis and the number of items within that scope, processing time may increase noticeably.</div>
want to group results by term set rather than by site	uncheck the Group by Site box.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

If you chose to group results **by site**:

- The top level of the analysis shows each of the Web applications and sites within the scope of your analysis that use managed metadata
- When expanded, the following information displays each list that uses managed metadata, along with the following information:
 - the name of the **Column referencing the Metadata**
 - the **Term Store**, **Term Group**, and **Term Set**
 - the **Term** specified for the list column (if applicable)

NOTE: The Term column will also show *item-level* terms only if the **Show items in list or library** box.
 - if the **Item Usage count** parameter was checked, the number of items for which the column has been populated with metadata.

Metalogix **Managed Metadata Usage** axcelertest\testbenchfarm
3/17/2014 12:46:50 PM

Show item usage count : True Show items in list or library : False

Group by Site : True


Select	Column referencing the Metadata	Term Store	Term Group	Term Set	Term	Item Usage Count
Abdul WAP 2 - 15250						
TeamSite (http://qa2010farmvm2:15250/sites/TeamSite)						
Select	TeamSite	http://qa2010farmvm2:15250/sites/TeamSite				
Announcements						
List Metadata Columns						
	Managed Metadata	Managed Metadata Service 1	Document Types	Legal		5
Shared Documents						
List Metadata Columns						
	Location	Managed Metadata Service	Site Collection - qa2010farmvm2-15250-sites-TeamSite	Location		0
GB WAP1 - 22909						
DocumentWorkspace (http://qa2010farmvm2:22909/sites/DocumentWorkspace)						
Select TeamSite	http://qa2010farmvm2:22909/sites/DocumentWorkspace/testgb				
Announcements						
List Metadata Columns						
	Managed Metadata	Managed Metadata Service 1	Document Types	Legal		5
Lists/ControlPoint v. 4.1 is the best yet!						
	Managed Metadata	Managed Metadata Service 1	Document Types	Legal	HR	
Lists/Get Started with Windows SharePoint Services!						

If you chose to group results **by TermSet**:


- The top level of the analysis shows each Term Store providing the metadata, followed by each **Term Group** and **Term Set**.
- When expanded, the following information displays for each term set:
 - the site that uses the metadata
 - for each list that uses the metadata:
 - the name of the **Column Referencing the Metadata**
 - if the **Item Usage count** parameter was checked, the number of items for which the column has been populated with metadata.

- the **Term** specified for the *column* (if applicable)

NOTE: The Term column will also show *item-level* terms only if the **Show items in list or library** box.

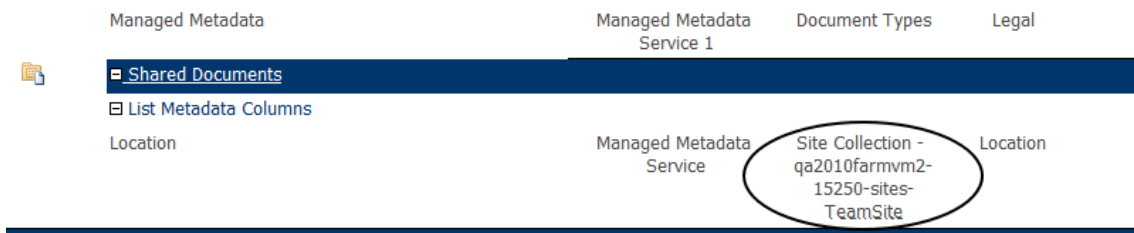

Note that if you have customized a term set for the site collection, SharePoint assigns the name of the Term Group.

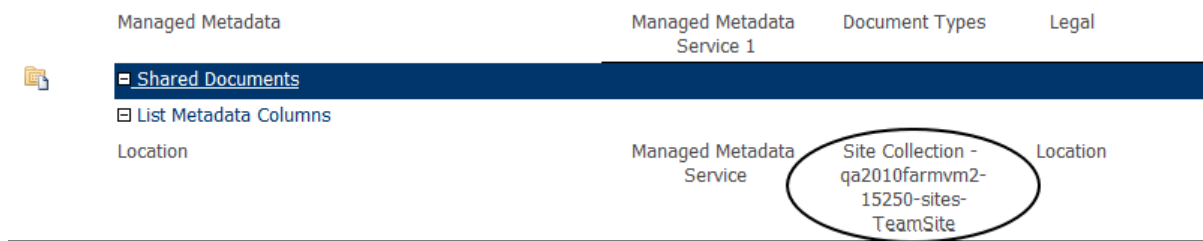

To open the SharePoint site that uses the metadata, click on the site url.

To open SharePoint list settings page for a list, click on the list name.

Analyzing Content Types

The Content Type Analysis provides information about SharePoint content types within a selected scope, including

- the content type's parent object
- the site or list where the content type was defined.

You can specify additional parameters to include more detail (such as a count of items that use the content type and/or a list of the items themselves), and you can choose to group results by either content type or site.

Note About "Common" Content Types

A list of "common content types" is maintained in the file **CommonContentTypes.xml**, which is located on the Web front-end server where ControlPoint is installed, in the following **SharePoint hive** subdirectory: **\TEMPLATE\LAYOUTS\Axceler\App_Data**.


By default, this list includes default content types associated with SharePoint built-in templates. The purpose of this list is to give you the option to "filter out" commonly used content types from analysis results.

You can customize this file to include "common" content types specific to your environment that you would like to have the option of excluding. For example, you may want to filter out a company-specific content type that is used in every site in your farm. You may also want to remove a default content type from the list.

Changes that you make to this file must be copied to any additional Web front-end servers in your farm. Also, whenever you install a ControlPoint update or patch, this file is overwritten with a file containing the default list. Therefore, if you choose to make modifications, it is recommended that you keep a backup of the file in a different location so that you can replace the default version after an update or patch.

To generate a Content Type Analysis:

- 1 [Select the object\(s\) whose content types you want to analyze.](#)
- 2 Choose **Change Management > Content Types**.
- 3 Specify the parameters for your analysis:
 - a) For **Include sites where content types are**, select one of the values described in the following table.

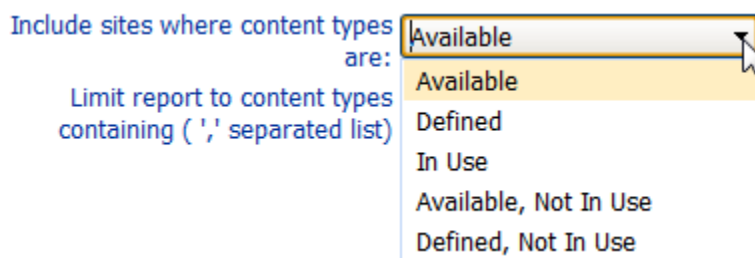

If you want results to include sites ...	Select
for which the content types are available, regardless of whether they have been "adopted" by a list/library	Available.
where the content types are defined, regardless of whether they have been "adopted" by a list/library	Defined.
containing lists/libraries that have "adopted" the content types	In Use. NOTE: A content type that has been adopted by a list or library is considered "in use" regardless of whether it has actually been associated with any items.
for which the content types: <ul style="list-style-type: none"> • are available, and • have not been adopted by a list/library 	Available, Not In Use.
where the content types: <ul style="list-style-type: none"> • are defined, and 	Defined, Not in Use.

If you want results to include sites ...	Select
<ul style="list-style-type: none"> have not been adopted by a list/library. 	

If you want to limit results to content types that contain a specific text string, enter that string in the **Limit report to content types containing** field. (You can enter multiple text strings as a comma-separated list).

Limit report to content types containing (';' separated list)

b) Specify the remaining checkbox criteria using the guidelines in the following table.

If you ...	Then ...
want to group results by content type rather than by site	uncheck the Group results by site box.
want results to include the names of content type columns	check the Show content type column names box.
want results to include a count of the number of items with which the content type is associated	check the Show item usage count box. NOTE: If you check this box, ControlPoint must iterate through all list items. Depending on the scope of your analysis and the number of items within that scope, processing time may increase noticeably.
want to <i>exclude</i> common content types from results (see "About Common Content Types," above)	check the Exclude common content types box.
want results to include the lists and libraries that use the content type	check the Show items in list or library box. NOTE: If you check this box, ControlPoint must iterate through all list items. Depending on the scope of your analysis and the number of items within that scope, processing time may increase noticeably.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The analysis results header includes all of the parameters that you specified.

The top levels of the analysis shows either:

- all of the sites within the scope or your analysis, followed by the content types that are used within each site (if you chose to group results by site)

OR

- each of the content types within the scope of your analysis, followed by the sites that use it (if you chose to group results by content type).

When results are expanded, the following information displays for each content type:

- the name of the **Content Type**
- the content types **Parent** object (that is, the content type from which the content type was created)
- the content type's **Source** (that is, the site or list where the content type was defined)
- each of the **Lists**/libraries
- if selected in the Parameters section:
 - the item **Count** (that is, the number of items within each list or library using that content type)
 - the content type's **Column Names**
 - a list of the **Items** that use the content type.

Metalogix

Content Types by Site

3/4/2014 11:56:26 AM

Parameters:

Include sites where content types are: Available
 Show content type column names
 Show item usage count
 Show items in list or library
 Exclude common content types

Select	Site/Group/Content Type/Lists/Items	Parent	Source / Item Count	URL/Columns
	SharePoint - 80			
Select	Alpha Snack Foods			http://2010foundation/sites/alpha
	Custom Content Types			
	Alpha Documents	Basic Page	Alpha Snack Foods	Department; Document Created By; Document Modified By; Modified; Title; Created; Name; Select; Content Type;
	Alpha Documents		3	
	Project Documents/ControlPoint v 4.7 User Guide.doc			
	Project Documents/ProfitabilityAnalysis.doc			
	Project Documents/RiskAssessment.doc			
	Compliance Documents	Document	Alpha Snack Foods	Document Created By; Document Modified By; Modified; Title; Created; Name; Select; Content Type;

NOTE: If you chose **Show item usage count** and/or **Show items in list or library**, an **Item Count** will be included. If you chose neither of these parameters, the Item Count column header will not be visible.

Analyzing SharePoint Workflows

The Workflow Analysis provides the following information about workflows in your SharePoint farm:

- a summary of all workflows defined for a site collection
- each list and library with which a workflow is associated
- optionally, detail about each workflow instance, including item name, workflow state, time started, last modified date, and last modified by.

NOTE: This analysis only includes workflows that have been defined within SharePoint or SharePoint Designer. Workflows created by other methods (for example, using Visual Studio Designer or third-party tools) will not be included in the analysis.

To generate a Workflow Analysis:

- 1 [Select the object\(s\) whose workflows you want to analyze.](#)
- 2 Choose **Change Management > Workflow Analysis**.

Workflow Analysis > Select parameter(s) to act on ?

The screenshot shows the 'Workflow Analysis' configuration page. It includes several filter sections:

- List Type:** A dropdown menu with options: <ALL>, Announcements List, Contacts List, Data Connection Library, and Discussion Board.
- List Name Contains:** A text input field.
- Limit by state:** A dropdown menu with options: <ALL>, Cancelled, Completed, Expired, and Expiring.
- Limit by users with tasks:** A text input field with a small icon below it.
- Start date after:** A date picker field.
- End date before:** A date picker field.
- Limit by duration > (days):** A text input field.
- Limit by inactivity for > (days):** A text input field.
- Show instances (takes more time):** An unchecked checkbox.
- Display with results expanded:** A checked checkbox.

- 3 If you want to limit results to specific lists, specify the appropriate parameters. Use the information in the following table for guidance.

If you want to limit results to ...	Then ...
workflows in specific types of lists	select one or more List Types . By default, analysis results include <i>all</i> list types.
lists whose name contains a specific text string	complete the List Name Contains field. List Name Contains: <input type="text" value="client"/>

- 4 If you want analysis results to include each instance of a workflow that has been associated with a document or list item:

a) Check the **Show instances** box.

NOTE: If you check this box, ControlPoint must iterate through all list items. Depending on the scope of your analysis and the number of items within that scope, processing time may increase noticeably.

b) If you want to further filter your results, specify the appropriate parameters. Use the information in the following table for guidance.

The screenshot shows the ControlPoint interface with the following elements:

- List Type:** A dropdown menu with options: <ALL>, Announcements List, Contacts List, Data Connection Library, and Discussion Board.
- List Name Contains:** A text input field.
- Show instances (takes more time):** A checked checkbox.
- Limit by state:** A dropdown menu with options: <ALL>, Cancelled, Completed, Expired, and Expiring.
- Limit by users with tasks:** A text input field containing "James Joyce ;" with a user icon and a checkmark.
- Start date after:** A date picker field.
- End date before:** A date picker field.
- Limit by duration > (days):** A text input field containing "20".
- Limit by inactivity for > (days):** A text input field containing "10".
- Display with results expanded:** A checkbox.

If you want to show only instances ...	Then ...
that are currently in a specific state	select one or more values from the Limit by State list box.
containing tasks assigned to one or more specific users	for Limit by users with tasks , select the user(s) whose workflow instances you want to analyze .
that were started after a particular date	specify a Start date after .
that ended before a particular date	specify an End date before .
that have been running for—or were completed within—more than a specified number of days	enter a value for Limit by duration > (days) .
that have been inactive for a specified number of days	enter a value for Limit by inactivity for > (days) .

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The top level of results show all of the site collections within the scope of your analysis where workflows have been defined, followed by a list of all sites for which workflows have been enabled.

When a site collection is expanded, a summary of workflows that are defined for each site collection displays.

NOTE: This information will be reported only if workflows are enabled on at least one site within the collection.

Web Application: SharePoint - 80			
■ Site Collection: Alpha Snack Foods			
Workflow	Status	Associations	In Progress
Approval	Active	101	0
Collect Feedback	Active	101	0
Collect Signatures	Active	99	0
Disposition Approval	Active	1	1
Schedule Web Analytics Alerts	Active	1	0
Schedule Web Analytics Reports	Active	0	0
Three-state	Active	0	0
Translation Management	Active	0	0
Collect Signatures - SharePoint 2010	Active	2	0
Approval - SharePoint 2010	Active	2	1

When a site is expanded, all of the lists with which workflows have been associated display.

Web Application: SharePoint - 80				
■ Site Collection: Alpha Snack Foods				
Workflow	Status	Associations	In Progress	
Three-state	Active	4	8	
■ Web Site: Alpha Snack Foods				
■ Alpha Documents				
Workflow	Last Modified	History List	Task List	In Progress
Workflow	9/5/2013 1:06:15 PM	Workflow History	Tasks	2
■ Web Site: Skunkworks Project				
■ Tasks				
Workflow	Last Modified	History List	Task List	In Progress
Three State Workflow	5/6/2013 10:40:05 AM	Workflow History	Tasks	2

If you chose to **Show Instances**, the following additional detail displays for each workflow instance:

- the **Item** with which the instance is associated
- the name of the **Workflow** instance and the workflow **Template** on which it is based
- the user the workflow instance was Created By
- a link to the **Workflow History** and **Task List** for the workflow instance (if applicable)
- the date when the workflow instance was **Started** and **Last Run**

- the workflow instance's current **State** as well as the instance's **duration** (in days) and number of days it has been **inactive**.

Analyzing Broken Links in SharePoint Lists

The Broken Links Analysis enables you to identify broken links in SharePoint linked lists. Included in the analysis is the reason why the link is considered "broken," as well as a link to the SharePoint Links Edit form, providing you with the opportunity to "fix" the link.

To generate a Broken Links Analysis:

- Select the object(s) for which you want to analyze broken links.
- Choose **Content > Broken Links Analysis**.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The top level of the analysis lists all of the Web applications within the scope of your analysis.

When expanded, the following information displays for each broken link:

- the name of the **Site** and **List** where the broken link is located
- the **Web Address** of the broken link
- the **Reason** for reported failure.

Metalogix		Broken Links	axcelertest/testbenchfarm 3/2/2020 9:24:30 AM
Select	Web Application / Site / List / Link	Web Address	Reason for reported failure
	Claims WAP - 11906		
Select	Blog1	http://bos-sp10-a-fe1:11906/sites/SC1/blog	
	Links		
	Photos	http://bos-sp10-a-fe1:11906/sites/SC1/blog/Lists/Photos	The operation has timed out


Some Reasons Why Links May Be Considered "Broken"

The following table describes some of the common reasons why a link on a SharePoint Linked List may be considered "broken."

Reason	Description
The operation has timed out	The request timed out before the page could be accessed.
The remote name could not be resolved	The url may be invalid.
The remote server returned an error: (401). Unauthorized	The ControlPoint Service Account does not have permissions to access the page.
The remote server returned an error: (404) Not Found	The page may not exist (or may no longer exist).

To view/edit the broken link:

Click the **Link** hyperlink to open the SharePoint Links Edit page

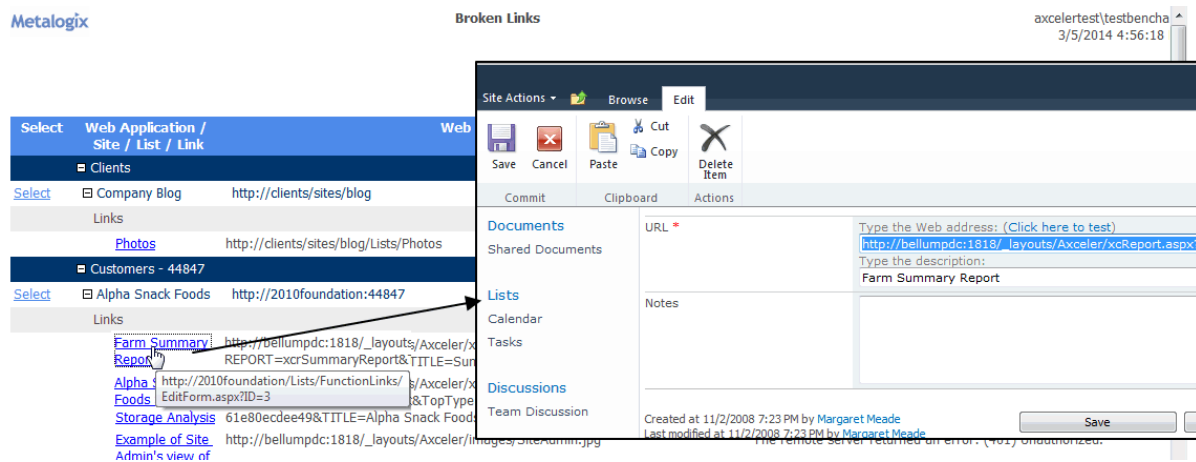

Generating a Solution Summary Analysis

The ControlPoint Solution Summary analysis lets you view details about solutions deployed within or across SharePoint farms:

- if you are a Farm Administrator, all deployed Farm Solutions


AND/OR

- sandboxed solutions deployed to site collections within your selected scope.

To generate a Solution Summary analysis:

- 1 Select the object(s) you want to include in your analysis.
- 2 Choose **Content > Solution Summary**.
- 3 Specify the parameters of your analysis:

- If you want your results to include only solutions whose name matches a specific text string, enter the string in the Solution name contains: field.
- If you want results to include ONLY Farm solutions OR Sandboxed solutions, select the appropriate option from the drop-down.



REMINDER: Farm solutions will be included only if you are a Farm Administrator.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

For each solution type you chose to include, the farm(s) within the selected scope display.

Farm Solutions section

If you are a Farm Administrator, the Farm Solutions section lists all of the solutions deployed to the entire farm (regardless of the selected scope), along with the following information:

- the **Solution Name**
- its current deployment **Status**
- where the solution is **Deployed To**
- the **Last Operation Time** that an action was taken
- whether the solution contains a **Web Application Resource, Global Assembly, and/or Code Access Security (CAS) Policy**:
- the **Solution ID**, and
- upon further drill-down, the **Last Operation Detail**.

Farm Solutions							
Solution Name	Status	Deployed To	Last Operation Time	Web App. Resource	Global Assembly	CAS Policy	Solution ID:
2010SharePoint							
accelerfeatures.wsp	Deployed	Globally deployed	3/14/2014 6:46:08 PM	No	Yes	No	c0096412-9324-4bc5-a411-652d319efe59
Last Operation Details: 2010Foundation : The solution was successfully deployed.							
controlpointhelpfeature.wsp	Deployed	Globally deployed	3/14/2014 6:47:45 PM	No	No	No	d4aac84e-6ea5-4fbf-b5de-cba2349a9d63
Last Operation Details: 2010Foundation : The solution was successfully deployed.							
metalogixproducts.wsp	Deployed	Globally deployed	3/14/2014 6:48:08 PM	No	Yes	No	c569440f-90b8-4258-8610-38eb61b63663
Last Operation Details: 2010Foundation : The solution was successfully deployed.							

Sandboxed Solutions section

If any sandboxed solutions have been installed in site collections within your selected scope, the Sandbox Solutions section lists each of these site collections, along with the following information about the installed solution(s):

- the **Solution Name**
- the solution's deployment **Status**

NOTE: A blank Status indicates that the solution is installed but has never been activated.
- the installed **Version** of the solution
- the solution's **Last Modified** date and time
- the solution's **Resource Usage**.

NOTE: For information on the concept of Resource Usage, consult your SharePoint documentation.
- the **Solution ID**

Sandboxed Solutions

Solution Name	Status	Version	Last Modified	Resource Usage	Solution ID
ControlPoint					
ControlPoint Configuration Site					
xcSandboxSolution.wsp		1.0	3/17/2014 12:23:06 PM	0.00	{478A2B56-A7E0-47E4-8099-5ED98B1F3974}

Analyzing Web Parts



The Web Parts analysis provide detailed statistics about Web Parts used in your SharePoint environment.

To generate a Web Parts analysis:

- 1 [Select the object\(s\) on which you want to perform the analysis.](#)

- 2 Choose **Change Management > Web Parts**.
- 3 Select the option you want to **Group By: Parts** or **Sites**.
- 4 [Specify additional parameters for your analysis.](#)

In addition to the "standard" parameters, you can limit results to Web Parts that meet one or more specific criteria, as described in the following table.

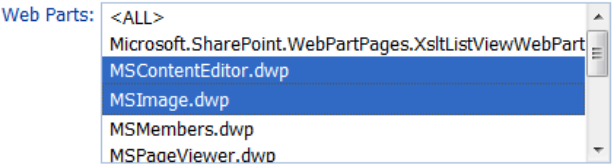If you want results to include ...	Then ...
one or more specific Web Parts	<p>select from the Web Parts list box.</p> <p>NOTE: If you do not select specific Web Parts, all Web Parts will be returned.</p>  <p>EXCEPTION: If the ControlPoint Application Administrator has chosen to exclude Web Parts from the ControlPoint Discovery process, the message <i>No Values Available</i> will display in the list box.</p>
Web Parts whose name contains a specific text string	<p>enter the text string in the Web Part Name contains field.</p> <p>NOTE: You can enter multiple text strings as a comma-separated list.</p> 
only Web Parts that are currently in use	<p>check the Show only parts used in pages box.</p> <p>NOTE: If you leave this box unchecked and you do not select a specific Web Part, analysis results will also include Web Parts that are <i>not</i> currently in use.</p>
only Web Parts that are closed and hidden	<p>check the Show only Closed and Hidden box.</p>

Note that the option to **Use cached data** will be disabled if Web Parts have been excluded from the ControlPoint Discovery job. The inclusion or exclusion of Web Parts can be managed by the ControlPoint Application Administrators. Details can be found in the *ControlPoint Administration Guide*.

☐ Use cached data

Now you can:




- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

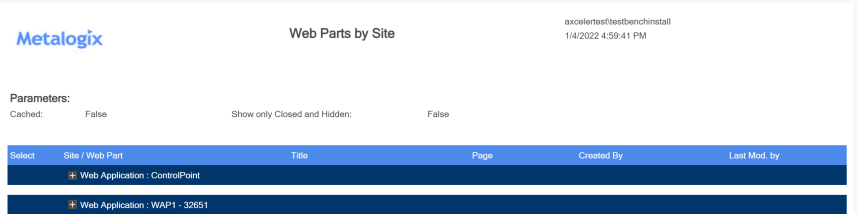If you chose to group results ...	Then
By part	<p>the top level of the analysis lists the Web Part(s) within the scope of your analysis, as well as the total number of pages in which each is used.</p>  <p>When expanded, a list of sites that use each Web Part displays.</p> 
By site	<p>the top level of the analysis lists the Web applications/site collections within the scope of your analysis.</p>  <p>When expanded, a list of Web Parts used by each site displays.</p>

If you chose to group results ...	Then																																												
	<table><tr><th>Select</th><th>Site / Web Part</th><th>Title</th><th>Page</th></tr><tr><td></td><td colspan="3">Web Application : ControlPoint</td></tr><tr><td>Select</td><td colspan="3">ControlPoint Configuration Site (http://cp-sp19-a-wfe0:1818)</td></tr><tr><td></td><td>BlogAdmin.dwp</td><td>\$Resources:core.adminlinks_schema_blog_title:</td><td></td></tr><tr><td></td><td>BlogArchives.dwp</td><td>\$Resources:core.BlogArchives\WPTitle:</td><td></td></tr><tr><td></td><td>BlogNotifications.webpart</td><td>\$Resources:core.BlogNotifications\WPTitle:</td><td></td></tr><tr><td></td><td>DocumentSetContents.dwp</td><td>\$Resources:dlccore.DocSetContent\WP Title</td><td></td></tr><tr><td></td><td>DocumentSetProperties.dwp</td><td>\$Resources:dlccore.DocSetProperties\WP Title</td><td></td></tr><tr><td></td><td>GettingStarted.webpart</td><td>\$Resources:core.GettingStarted\WebPartTitle:</td><td></td></tr><tr><td></td><td>Media.webpart</td><td>\$Resources:cmscore.Media\WebPart Title</td><td></td></tr><tr><td></td><td>MSContentEditor.dwp</td><td>\$Resources:core.ContentEditor\WebPartTitle:</td><td></td></tr></table>	Select	Site / Web Part	Title	Page		Web Application : ControlPoint			Select	ControlPoint Configuration Site (http://cp-sp19-a-wfe0:1818)				BlogAdmin.dwp	\$Resources:core.adminlinks_schema_blog_title:			BlogArchives.dwp	\$Resources:core.BlogArchives\WPTitle:			BlogNotifications.webpart	\$Resources:core.BlogNotifications\WPTitle:			DocumentSetContents.dwp	\$Resources:dlccore.DocSetContent\WP Title			DocumentSetProperties.dwp	\$Resources:dlccore.DocSetProperties\WP Title			GettingStarted.webpart	\$Resources:core.GettingStarted\WebPartTitle:			Media.webpart	\$Resources:cmscore.Media\WebPart Title			MSContentEditor.dwp	\$Resources:core.ContentEditor\WebPartTitle:	
Select	Site / Web Part	Title	Page																																										
	Web Application : ControlPoint																																												
Select	ControlPoint Configuration Site (http://cp-sp19-a-wfe0:1818)																																												
	BlogAdmin.dwp	\$Resources:core.adminlinks_schema_blog_title:																																											
	BlogArchives.dwp	\$Resources:core.BlogArchives\WPTitle:																																											
	BlogNotifications.webpart	\$Resources:core.BlogNotifications\WPTitle:																																											
	DocumentSetContents.dwp	\$Resources:dlccore.DocSetContent\WP Title																																											
	DocumentSetProperties.dwp	\$Resources:dlccore.DocSetProperties\WP Title																																											
	GettingStarted.webpart	\$Resources:core.GettingStarted\WebPartTitle:																																											
	Media.webpart	\$Resources:cmscore.Media\WebPart Title																																											
	MSContentEditor.dwp	\$Resources:core.ContentEditor\WebPartTitle:																																											

Within the context of the site, the following information displays for each Web Part:

- the **Title** of the Web Part—that is, the name assigned to that instance of the Web Part

NOTE: If the same Web Part is used more than once on a page, the title of each instance is listed in a comma-separated list. Web Parts that are hidden or closed are annotated.



- the **Page** on which the Web Part is used
- the following values, which are the same as those reported in the SharePoint Web Gallery:
 - the user account that the Web Part was **Created by**, well as the user account it was **Last Modified by**
 - the dates when the Web Part was both **Created** and **Last Updated**

NOTE: The Created by, Last Modified by, Created, and Last Updated values refers to the Web Part itself, not its instance on a specific page. Often, the Created date is the date that the Web Part was installed on the system.

- the **Size** of the Web Part in kilobytes (**KB**).

Note that some commonly-built Web Parts that display in analysis results (such as the List View Web Part) are not listed in the Web Parts Gallery and are not associated with a specific creator or created by/modified by dates. Often, such Web Parts have names that begin with "Microsoft SharePoint."

Microsoft.SharePoint.WebPartPages.XsltListViewWebPart	Announcements,Links	default.aspx	N/A	N/A	N/A	N/A	N/A
Microsoft.SharePoint.WebPartPages.XsltListFormWebPart	File Images	default.aspx	Custom Account	Feedback Textbox	11/1/2008	7/15/2010	0.44

Generating a SharePoint Hierarchy Report

The SharePoint Hierarchy Report lets you view and print the hierarchy of Web applications,site collections, sites—and optionally, lists—within a SharePoint farm. You can generate this report for the entire farm or for selected objects within the Hierarchy.

Information in this report is current as of the last [ControlPoint Discovery](#).

EXCEPTION: If you ran the report at the site level and Include Children is checked, the report will be run on real-time data.

In a multi-farm environment, this analysis can only be run on the home farm.

To generate a SharePoint Hierarchy Report:

- 1 [Select the object\(s\) that you want to include in the report.](#)
- 2 Choose **Configuration > SharePoint Hierarchy**.
- 3 Specify one or more parameters for your analysis:

If you want results to ...	Then ...
include lists and libraries within sites	check the Include Lists box. NOTE: If you check this box, ControlPoint must iterate through all lists. Depending on the scope of your analysis and the number of lists within that scope, processing time may increase noticeably.
include folders and items within sites	check the Include Folders and Items box. NOTE: If you check this box, ControlPoint must iterate through all list items. Depending on the scope of your analysis and the number of items within that scope, processing time may increase noticeably.
display the url for each site collection and site to the right of each site name	check the Display URLs box.

If you want results to ...	Then ...
	NOTE: If you leave this box unchecked, only the names of the site collections and sites will display.
include objects whose permissions are unique (not inherited)	check the Unique permissions only box. NOTE: If you check this box, objects will be shown within the context of the hierarchy, even if the parent object has inherited permissions.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

.

The top level displays all Web applications within the scope of your analysis.

SharePoint Hierarchy

axcelertest\testbenchaxceler
3/4/2014 2:02:02 PM

Parameters:

Include Lists:	True	Include Folders and Items :	True
Display URLs:	True	Unique permissions only:	False

Web Application / Site Collection / Site / List / Item	Type	Unique
Extranet	Web App.	
Intranet	Web App.	
SharePoint - 80	Web App.	

☐ Selection:

When expanded:

- the name of the object and its **Type** (site collection, site, list, item, and so on) displays
NOTE: If you chose to Display URLs, the url for each site collection and site displays in parentheses to the right of its name.

- a plus sign (+) identifies each object whose permissions are unique (that is, not inherited from the parent objects).

***Baking Technology : (http://2010foundation/sites/alpha/baking)	Site	+
Announcements(1)	List	
Lists/Announcements	Relative path	
Get Started with Windows SharePoint Services!	Item	
Calendar(0)	List	
Links(0)	List	
Shared Documents(26)	List	
Shopping List(1)	List	
Tasks(0)	List	
Team Discussion(2)	List	
***Skunkworks Project : (http://2010foundation/sites/alpha/skunkworks)	Site	+
***Healthy Foods : (http://2010foundation/sites/alpha/skunkworks/healthy)	Site	+
Tofu Bars : (http://2010foundation/sites/alpha/skunkworks/healthy/tofu)	Site	
Yogurt Covered Pretzels : (http://2010foundation/sites/alpha/skunkworks/yogurt)	Site	

Analyzing Trends

For a single farm, Web application, or site collection, you can analyze trends over a specified time period in:

- activity
- site count, and/or
- storage.

To generate a Trends analysis:

- 1 Select the object for which you want to analyze trends.

NOTE: You can only analyze trends for one at a time. If you multi-select, only the object on which you right-clicked will apply.

- 2 Use the information in the following table to determine the appropriate action to take.

If you want to analyze trends in ...	Choose ...
activity	Activity > Trend Analysis for Activity.
site count	Content > Trend Analysis for Site Count.
storage	Storage > Trend Analysis for Storage.


- 3 Specify the following parameters for your analysis:

- a) Enter or select a **Start Date** and **End Date** for your analysis.

The date range you select determines the time intervals captured in the analysis, as described in the following table.

If the time period you specified is ...	Then the Trend Analysis will be reported ...
up to 60 days	by Day
between 61 and 364 days	by Week
365 days or greater	by Month.

- b) If you want to change the **Statistics to Graph**, select a different value from the drop-down.

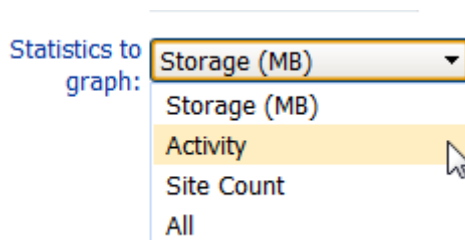

- c) If you want your graph to include a line that smooths out short-term fluctuations, check the **Include moving Average** box.

The default value for **Moving average period** (days) is 7, which represents the number of days within a given week. This value is useful for many business users who can expect less activity, for example, on the weekend. You can, however, change this value to measure moving average for a different time period. For example, if you generally experience week-to-week fluctuations over the course of a month, you may choose to set the Moving average period to 31.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)


OR

- [save the operation as XML Instructions that can be run at a later time.](#)


Trend Analysis results consist of two graphs:

- The Trend Analysis bar graph includes the statistics for the selected criterion. (Note that if you selected ALL from the **Statistics to graph** drop-down, a separate graph will be included for each). Below are examples of Trend Analyses by Day reports (including a 7-day moving average) for Activity, Storage, and Site Count over the same 28-day time period.


Activity Trend Analysis

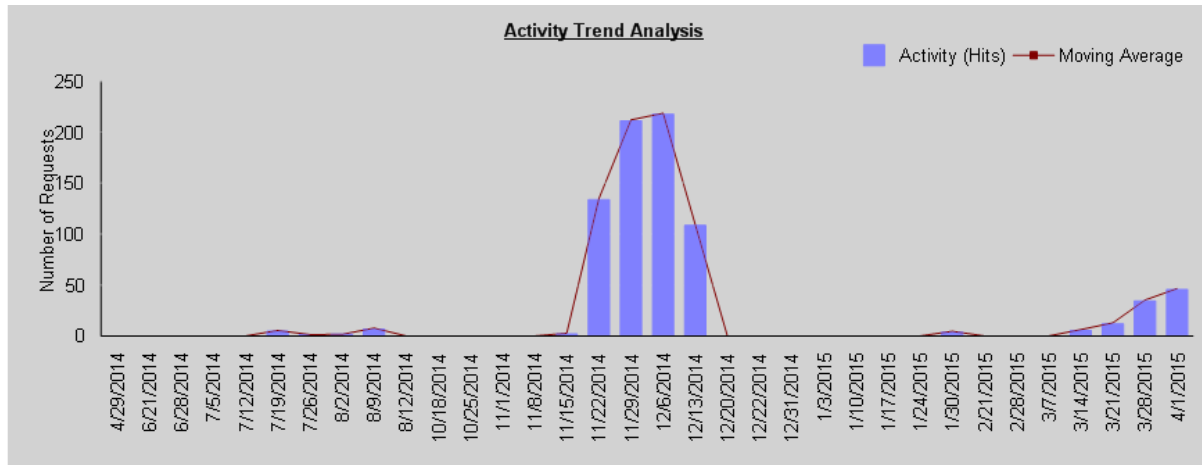


Storage Trend Analysis

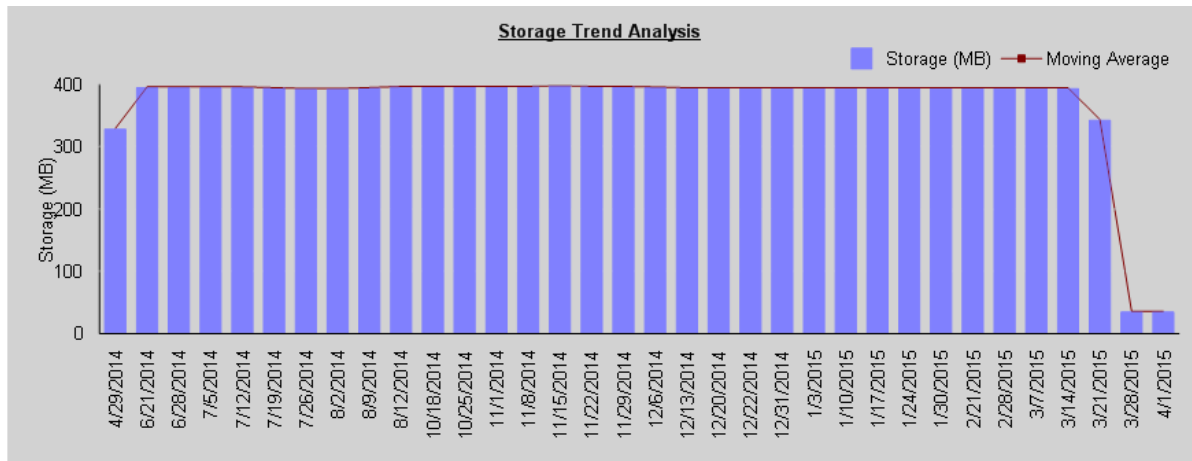

Site Count Trend Analysis

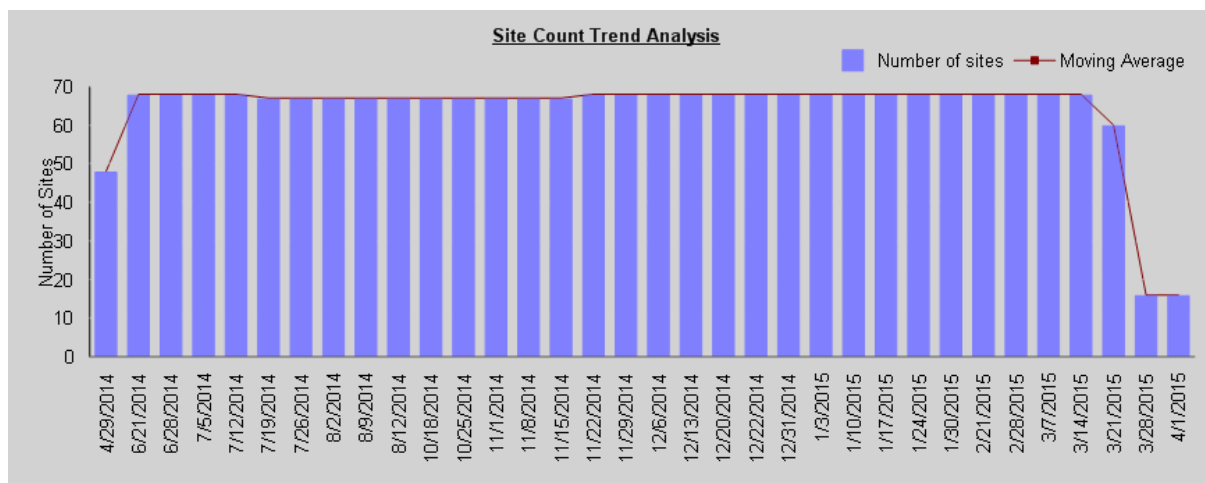

- The second graph is a line graph that shows statistics for all three options (activity, storage, and site count) in terms of a percentage over the course of the selected time period. Note that the maximum value (100%) represents the most storage used, greatest level of activity, and largest site count over the selected time period.

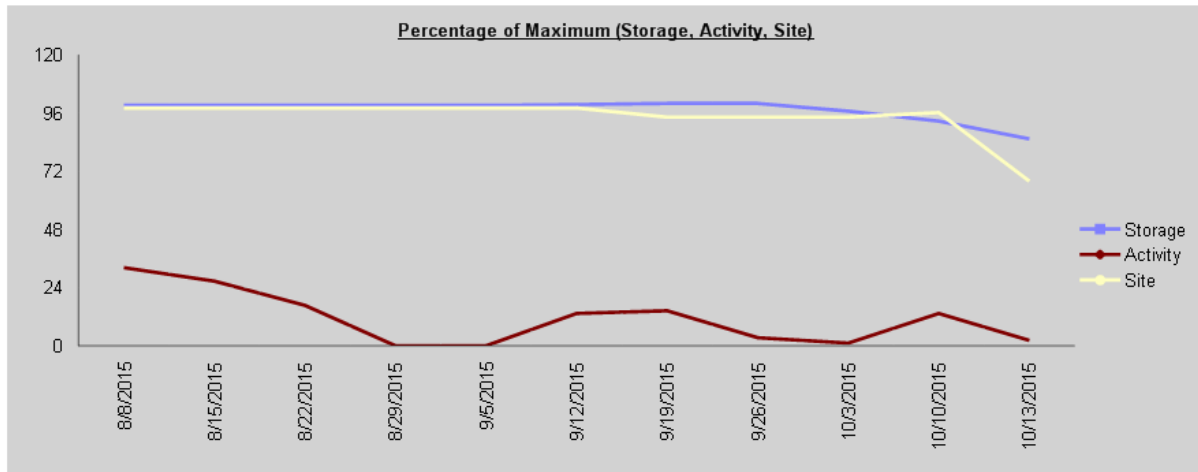

Auditing Activities and Changes in Your SharePoint Environment

SharePoint captures activities and changes to the environment via the following mechanisms:

- the **Audit Log**, which focuses on *activities* performed by SharePoint users.
- the **Change Log**, which focuses on *changes* made to the SharePoint environment.

ControlPoint provides functionality that enables you to view contents of audit logs and change logs, which is not currently available in SharePoint.

Events Captured in SharePoint Logs

The following tables identify the log(s) where different types of events are recorded and the event codes used to identify them.

NOTE: Be aware that some events may not appear immediately in analysis results, as it can take several minutes for them to be recorded in the SharePoint log.

Add/Delete Site Collections, Sites, Libraries and Lists

Event	Where Recorded (ControlPoint Event Type)
<ul style="list-style-type: none"> • Site collection added • Site added • Library or list added 	Change Log (Add) NOTE: It may take several minutes for an added site to appear in the Change Log.

Event	Where Recorded (ControlPoint Event Type)
<ul style="list-style-type: none"> Site deleted Library or list deleted 	<ul style="list-style-type: none"> Audit Log (Delete/Delete Child) <p>NOTE: A Delete event is reported from the perspective of the object itself. A Delete Child event is reported from the perspective of the object's parent.</p> <ul style="list-style-type: none"> Change Log (Delete)

Add/Delete Document and List Items

Event	Where Recorded (ControlPoint Event Type)
Document or list item added	<ul style="list-style-type: none"> Audit Log (Update) Change Log (Add)
Document or list item deleted	<ul style="list-style-type: none"> Audit Log (Delete/Delete Child) <p>NOTE: A Delete event is reported from the perspective of the object itself. A Delete Child event is reported within the scope of the object's parent.</p> <ul style="list-style-type: none"> Change Log (Delete)
Document or list item restored	<ul style="list-style-type: none"> Audit Log (Undelete) Change Log (Restore)

Other Actions on Document and List Items

Event	Where Recorded (ControlPoint Event Type)
<ul style="list-style-type: none"> Document opened/downloaded List item viewed List item properties viewed 	Audit Log (View)
<ul style="list-style-type: none"> Document or list item edited Document or list item properties edited 	<ul style="list-style-type: none"> Audit Log (Update) Change Log (Update)
Item checked in/checked out	<ul style="list-style-type: none"> Audit Log (Check In/Check Out) Change Log (Update)
Items moved to another location in the site	<p>Audit Log (Move)</p> <p>Change Log (Move Away/Move Into)</p>

Event	Where Recorded (ControlPoint Event Type)
Items copied to another location in the site (using the Send To menu entry)	Audit Log (Update)
Item accessed as part of a workflow	Audit Log (Workflow)

Add/Delete/Change Users and Permissions

Event	Where Recorded (ControlPoint Event Type) (SharePoint Event Code)
Site security inheritance broken	<ul style="list-style-type: none"> Audit Log (Turn Off Inheritance from Parent) (<i>SecRoleBindBreakInherit</i>) Change Log (Add Assignment) (<i>AssignmentAdd</i>)
Site security inheritance restored	<ul style="list-style-type: none"> Audit Log (Turn On Inheritance from Parent) (<i>SecRoleBindInherit</i>) Change Log (Delete Assignment) (<i>Assignment</i>)
Permission level inheritance restored	Change Log (Delete Assignment) (<i>Assignment</i>)
Site permission level created	<ul style="list-style-type: none"> Audit Log (Create Permissions) (<i>SecRoleDefCreate</i>) Change Log (Add Role) (<i>RoleUpdate</i>)
Site permission level deleted	<ul style="list-style-type: none"> Audit Log (Remove Permissions) (<i>SecRoleDefDelete</i>) Change Log (Delete Role) (<i>RoleUpdate</i>)
Site Permission level changed	<ul style="list-style-type: none"> Audit Log (Modify Permissions) (<i>SecGroupCreate</i>) Change Log (Update Role) (<i>RoleUpdate</i>)
User or SharePoint group permission changed	<ul style="list-style-type: none"> Audit Log (Change Permissions) (<i>SecRoleBindUpdate</i>) Change Log (Add Assignment and/or Delete Assignment) (<i>AssignmentAdd</i> and/or <i>Assignment</i>)
SharePoint group created	<ul style="list-style-type: none"> Audit Log (Create Group) (<i>SecGroupCreate</i>) Change Log (Add)
SharePoint group deleted	<ul style="list-style-type: none"> Audit Log (Delete Group) (<i>SecGroupDelete</i>) Change Log (Delete)
Member added to SharePoint group	<ul style="list-style-type: none"> Audit Log (Add Member to Group) (<i>SecGroupMemberAdd</i>) Change Log (Add Member) (<i>MemberAdd</i>)
Member deleted from SharePoint group	<ul style="list-style-type: none"> Audit Log (Delete Member from Group) (<i>SecGroupMemberDelete</i>) Change Log (Delete Member) (<i>MemberDelete</i>)

Add Content Types and Columns

Action	Where Recorded (ControlPoint Event Type) (SharePoint Event Code)
Content Type added	Audit Log (Change Profile) (<i>ProfileChange</i>)
Column added	Audit Log (Change Schema) (<i>SchemaChange</i>)

SharePoint Search Activity

Event	Where Recorded (ControlPoint Event Type)
SharePoint search performed	Audit Log (Search)

Audit Settings

Event	Where Recorded (ControlPoint Event Type) (SharePoint Event Code)
Audit settings changed	Audit Log (Change Mask) (<i>AuditMaskChange</i>)

Analyzing Audit Log Contents

The ControlPoint Audit Log analysis extends SharePoint's built-in audit logging by letting you easily view entries written to the audit log. You can focus your analysis on specific event types, and even limit the scope to include only certain objects (sites, lists, documents, etc.).

Audit logging must be enabled for each site collection whose events you want to log. You can enable audit logging for multiple site collections at a time via the ControlPoint [Manage Audit Settings action](#) or [Set Site Collection Properties action](#).

To generate an Audit Log analysis:

- 1 [Select the object\(s\) for which you want to view audited events.](#)

NOTES:

- If the scope of your analysis includes site collections that have been deleted, audit events associated with that site collection will no longer exist.
- As with all ControlPoint analyses, if you initiated the analysis from the farm, Web application, or site collection level, all child items will be included by default. If you initiated the analysis at the site level, only information for that site (not its subsites) will be included. You can, however, use the [Change Selection option](#) to further refine your scope.

2 Choose **Audit and Alerts > Audit Log**.

3 Specify one or more of the following parameters for your analysis:

- select both a **Start** and **End date** (📅) and time (🕒) for which you want to report

NOTE: The time period for which you can generate an audit log analysis depends on how many days audit data is retained. The ControlPoint default is 0 (meaning that audit data is never deleted), but the ControlPoint Application Administrator can specify a different value via ControlPoint Configuration Settings.

- select the **User(s)** whose actions you want to audit (or leave blank for all users)
- enter a *relative URL* (note that you can enter a url down to the item level; you can also use an asterisk (*) at the beginning and end of a url as wildcards)

EXAMPLES

- sites/al*
- sites/alpha/shared documents/xcrSummaryReport.pdf
- select one or more **Event** types from the list box. Refer to the topic [Events Captured in SharePoint Log](#).

CAUTION: Although you have the option of viewing ALL events, if you select this option your result set may be extremely large. One reason is that SharePoint records some events (such as a View) as a series of several events. Also, some event types (such as Update) may encompass a wide variety of events.

Audit log Analysis > Select parameter(s) to act on ?

00:00:04 - Process Completed

Start date: 10/9/2015 12:00 AM 📅 🕒 End date: 10/10/2015 12:00 AM 📅 🕒

User(Blank for all users):

🔍 📄

Event(s): <ALL>
Add Member To Group
Change Mask
Change Permissions
Change Profile
Change Schema

Scope: <ALL>
Document
Folder
List
List Item
Site

URL(use * for wildcard):

☐ Read From Archive

Analyzing Change Log Contents

The ControlPoint Change Log lets you view the contents of SharePoint change logs for one or more selected event types.

To generate a Change Log analysis:

- 1 [Select the object\(s\) for which you want to view change log entries.](#)
- 2 Choose **Audit & Alerts > Change Log Analysis**.
- 3 Specify one or more of the following parameters for your analysis:
 - select both a **Start** and **End date** (📅) and time (🕒) for which you want to report
The time period for which you can generate a change log analysis depends on how many days change log data is retained. ControlPoint relies on the history maintained by SharePoint. SharePoint for Office 365 retains Change Log data for 60 days.
 - enter a *relative URL* (note that you can enter a url down to the item level; you can also use an asterisk (*) at the beginning and end of a url as wildcards)
EXAMPLES
 - sites/al*
 - sites/alpha/shared documents/SharePointPlanning.docx
 - select one or more **Event** types from the list box. Refer to the topic [Events Captured in SharePoint Logs](#) for guidance in selecting the appropriate event type(s).

Change Log Analysis > Select parameter(s) to act on ?

Start date: 7/9/2015 12:00 AM 📅🕒

End date: 10/10/2015 12:00 AM 📅🕒

Event(s): <ALL>
Add
Add Assignment
Add Member
Add Role
Delete

URL(use * for wildcard): *alpha*

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)
- OR
- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

Analyzing SharePoint Alerts by Site

The SharePoint Alerts by Site analysis provides the following information about SharePoint alerts that have been set within one or more selected sites:

- the user for whom the alert was set
- the list or item on which the alert was set
- alert properties (including event type and frequency), and
- the date and time of the next alert.

To generate a SharePoint Alerts by Site analysis:

- 1 [Select the object\(s\) you want to include in your analysis.](#)
- 2 Choose **Audits and Alerts > SharePoint Alerts by Site**.
- 3 [Specify the parameters for your analysis.](#)

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The top level of analysis results lists all of the Web applications within the scope of your analysis.

When expanded, a list of sites on which alerts have been set displays, along with the following detail about each alert:

- the **Site** for which the alert was created
- the Titles of the **list**, and if applicable, **item**, for which the alert was set
- each of the **Users** for whom the alert was set, along with:
 - the title of the **Alert**
 - the alert **Type** (List or Item)
 - the **Event** that triggers the alert and, if the alert was created for an item, the **Filter** (that is, the option selected for "Send Alerts for These Changes")

- the **Next Alert** date and time

bellum\administrator
3/4/2014 3:14

SharePoint Alerts by Site

Parameters:
Users:

Select	Web Application / Site / List / Users	Alert / Item	Type	Event / Filter	Frequency	Next Alert
SharePoint - 80						
Select	Alpha Snack Foods			http://2010foundation/sites/alpha		
	Activity Reports					
	bellum\fscottfitzgerald	Notify of deletions	List	Delete	Immediate	
	bellum\jamesjoyce	TestFLS	List	All	Immediate	
				Someone else changes an item		
				Anything changes		
	Alpha Documents					
	bellum\fscottfitzgerald	Notify of deletions	List	Delete	Immediate	
	bellum\jamesjoyce	TestFLS	List	All	Immediate	
				Someone else changes an item		
				Anything changes		
	Calendar					
	bellum\fscottfitzgerald	Notify of deletions	List	Delete	Immediate	

Analyzing SharePoint Alerts by User

The SharePoint Alerts by User analysis provides the following information about SharePoint alerts that have been set for one or more users:

- the site within which the alert was set
- the list or item on which the alert was set
- alert properties (including event type and frequency), and
- the date and time of the next alert.

To generate an Alerts by User analysis:

- 1 [Select the object\(s\) you want to include in your analysis.](#)
- 2 Choose **Audits and Alerts > SharePoint Alerts by User.**
- 3 [Specify the parameters for your analysis .](#)

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

When expanded, each **Site** for which alerts have been created displays, along with the following detail about each alert:

- the title of the **Alert**
- the **List** and (if applicable) **Item** on which the alert was created
- the alert **Type** (List or Item)
- the **Event Type** that triggers the alert
- the **Frequency** of the alert as well as the **Next Alert** date and time
- if the alert was set for an *item*, the **Filter** used (that is, the option selected for "Send Alerts for These Changes")

Metalogix SharePoint Alerts by User bellum\administrator
3/4/2014 3:21:10 PM

Parameters:

Users: AXCELERTEST\jscottfitzgerald

Select	User / Site / Alert	Web Application / List / Item	Type	Event Type	Frequency / Filter	Next Alert
	bellum\jscottfitzgerald					
Select	Alpha Snack Foods	SharePoint - 80				http://2010foundation/sites/alpha
	Notify of deletions	xcMostLeastReport_Dropdown_DS	List	Delete	Immediate	Someone else changes an item
	Notify of deletions	Form Templates	List	Delete	Immediate	Someone else changes an item
	Notify of deletions	xcMostLeastReport_dsSiteCollLeastActive	List	Delete	Immediate	Someone else changes an item
	Notify of deletions	Issue Tracking List	List	Delete	Immediate	Someone else changes an item
	Notify of deletions	Tasks	List	Delete	Immediate	Someone else changes an item

Analyzing ControlPoint Policies

The ControlPoint Policies analysis lets you analyze the following information about ControlPoint policies that have been created for your farm:

- the name of the policy and its owner (that is, the person who created the policy)
- the date and time when the policy was created
- the scope of the policy
- the policy rule
- when and by whom the policy was last updated.

To generate a ControlPoint Policies Report:

- 1 [Select the object\(s\) for which you want to analyze policies.](#)
- 2 Chose **Automation > ControlPoint Policies**.
- 3 Specify one or more of the following parameters for your analysis.

If you want results to include ...	Then ...
policies created by one or more specific users (and you are a farm administrator)	select each Policy Owner you want to include in your analysis. NOTE: If you are not a farm administrator, you can only include policies that you created.
policies whose name contains a specific text string	enter that string in the Policy Name Contains field.
policies that contain one or more specific rules	select from the Policy Rules list (you can select multiple rules using the [CTRL] and [SHIFT] key in the conventional manner).
both active and inactive policies	uncheck the Display only Active Rules box.

ControlPoint Policies > Select parameter(s) to act on 

00:00:01 - Process Completed

Policy Owner:


Policy Rules: 

☒ Display only Active Rules
☒ Display with results expanded

Policy Name Contains:

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The top level of analysis results list all of the policies within the selected scope

When expanded, the following information displays for each policy:

- the policy **Owner**
- an indication of whether or not the policy is **Active**
- the policy **Rule**
- the date and time when the policy was **Created** and **Last Updated**
- the user that the policy was last **Updated By**
- the policy **Description**

- the scope of the policy, including url and the number of immediate children covered by the policy.

Metalogix **ControlPoint Policies** bellum\administrator
10/9/2015 5:41:49 PM

Parameters:
 Selected Owners: BELLUM\administrator
 Display only Active Rules: True

Policy / Owner	Active	Rule	Created	Last Updated	Updated By	Description
Do Not Let Development Group Create Subsites in SharePoint 80						
bellum\administrator	+	Control Subsite Creation	5/14/2014 9:32:27 AM	5/14/2014 9:56:34 AM	bellum\administrator	SharePoint - 80 (14) (http://2010foundation/)
Prevent creation of new intranet sites						
bellum\administrator	+	Control Subsite Creation	9/28/2015 4:44:20 PM	9/28/2015 6:02:00 PM	bellum\administrator	Intranet (4) (http://2010foundation:40042/)

Selection:

Include Children	Type	Name	URL	Path
<input checked="" type="checkbox"/>		2013SharePoint	http://2010foundation:1919/	2013SharePoint

bellum\administrator Page 1 of: 1 10/9/2015 5:41:49 PM

Analyzing Users and Permissions

ControlPoint provides the following tools that allow you to examine permissions of SharePoint users throughout your farm:

- Site Permissions** shows the permissions of users for selected sites
- Site List Permissions** shows user permissions for individual lists and list items within a site.

An additional analysis, **Comprehensive Permissions**, show permissions for all sites, lists, and optionally list items within a single result set.

NOTE: In addition to showing user permissions at the individual site level, all Site Permissions analyses include any Web application policy permissions users may have.

You can also:

- find Orphaned Domain Users (that is, users who are no longer listed in the Active Directory but still have permissions in SharePoint).
- analyze **Comprehensive User Information** about a single user, which in addition to the user's permissions, includes
 - workflows created by the user
 - documents created by, last modified by, and checked out to the user
 - SharePoint alerts that have been created for the user
 - open tasks assigned to the user, including workflow tasks
 - membership in both SharePoint and Active Directory groups.
- analyze the membership and permissions of **SharePoint Groups**.

IMPORTANT: Permissions Reporting for Claims-Based Users

If your SharePoint farm includes claims-based authentication, permissions granted through a claim may not be reliably reported because SharePoint only retains permissions information for a claims-based user for a limited time after the user logs in.

Finding Orphaned Domain Users

If you are using Active Directory as the authentication method for your SharePoint environment, the Orphaned Domain Users analysis lists users who currently have permissions in SharePoint but are no longer valid in the Active Directory.

NOTE: The results of an Orphaned Domain User analysis are security-trimmed. An orphaned user's individual permissions for sites to which the administrator running the analysis does not have access will not be reflected in results. If all of the sites in which a SharePoint user has permissions are not accessible to the administrator running the analysis, that user will not be included in analysis results. Therefore, the analysis will be most complete when run by an administrator with full permissions to the entire farm.

Users Evaluated as Potential Orphans

ControlPoint evaluates users as potential orphans if they are disabled in and/or deleted from Active Directory but are found in:

- a SharePoint permission entry at any level (site, subsite, list, library, folder, or item)
- a site collection's All People list, and/or
- a Site Collection Administrator's list.

ControlPoint does not evaluate names in Web application policies, the Farm Administrator list, or any custom SharePoint list that may contain user names.

Users That Are Not Reported as Orphans


ControlPoint does not report a user as being orphaned if it is considered valid by SharePoint (that is, if a user who is not in the All People list can still be validated by the SharePoint People Picker). Active Directory entries that are considered valid by SharePoint (and therefore are not reported as orphaned by ControlPoint) include:

- expired accounts, and
- locked accounts (i.e., accounts for which the allowable threshold for failed login attempts has been exceeded).


To generate an Orphaned Domain Users analysis:

- 1 [Select the object\(s\) you want to include in your analysis.](#)
- 2 Choose **Users and Security > Orphaned Domain Users**.
- 3 [Specify the parameters for your analysis.](#)

Note that you have the option of limiting your results only to users who are either disabled in or have been deleted from Active Directory. If you accept the default option, **Show all orphans**, both types of users will be included.

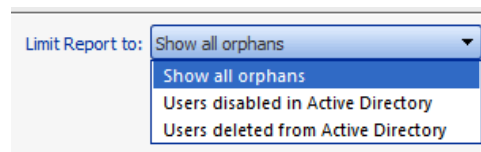

- 4 If you want ControlPoint to automatically delete all users returned by the analysis on the home farm, check the **Automatically delete users after analysis has run** (in home farm only). Note that, in a multi-farm environment, this action cannot be carried out on a remote farm.

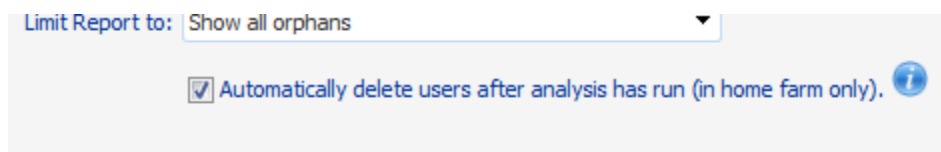

CAUTION: If you check this box, ControlPoint will automatically submit one or more Delete User jobs to the ControlPoint scheduler. The number of jobs submitted depends on the number of users to be deleted, and the number of users processed in a job is determined by the ControlPoint Setting OrphanDeleteBatchSize. The first job will be scheduled to run 30 minutes after the analysis has finished processing. Because this action cannot be undone, you may want to back up user permissions before running the operation. (You also have the option of deleting jobs before they have run via the [Schedule Monitor](#).)

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)
- OR
- [schedule the operation to run at a later time or on a recurring basis.](#)
- OR
- [save the operation as XML Instructions that can be run at a later time.](#)

Parameters:

Show all orphaned users

[Delete all orphans \(in home farm only\)](#)

User Rights

*** - site security not inherited

Select	User	Display Name/Group	Admin	Full Control	Design	Contribute	Read	Limited	Other
	axcelertest\bettygroup2	<axcelertest\bettygroup2>							
	axcelertest\sales	<axcelertest\sales>							
	axcelertest\sneumann (DISABLED)	Stan Neumann							
	bellum\administrator	<bellum\administrator>							
	bellum\fscoffitzgerald	FScott Fitzgerald							
	bellum\haroldpotter	Harold Potter							
	bellum\isaacasimov	Isaac Asimov							
	bellum\jamesjoyce	James Joyce							
	bellum\margaretmeade	Margaret Meade							
	bellum\marktwain	Mark Twain							
	bellum\olivertwist	Oliver Twist							
	bellum\patentattorneys	<bellum\patentattorneys>							

When expanded, a list of rights for each orphaned user displays the same information as the User Rights section of the [Site Permissions analysis](#).

Parameters:

Show all orphaned users

[Delete all orphans \(in home farm only\)](#)

User Rights

*** - site security not inherited

Select	User	Display Name/Group	Admin	Full Control	Design	Contribute	Read	Limited	Other
	axcelertest\bettygroup2	<axcelertest\bettygroup2>							
Select	Alpha Snack Foods	SharePoint - 80 (Anonymous Access Enabled) http://2010foundation/sites/alpha							
		<Summary>							
		<Direct>							
SelectStay Fresh Packaging***	SharePoint - 80 (Anonymous Access Enabled) http://2010foundation/sites/alpha/stayfresh							
		<Summary>							
		<Direct>							
	axcelertest\sales	<axcelertest\sales>							
Select	Alpha Snack Foods	Customers - 44847 http://2010foundation:44847							
		<Summary>							
		<Direct>							
		Alpha Snack Foods Members							
		Alpha Snack Foods Visitors							
	axcelertest\sneumann	Stan Neumann							

Disabled Accounts as Orphans

Users whose accounts have been disabled (or disabled and renamed) in the Active Directory are normally considered orphans by both SharePoint and ControlPoint and are annotated as such in analysis results. This annotation is intended to help you in evaluating whether or not such users really should be considered orphans in accordance with you organization's policies.

axcelertest\sneumann (DISABLED)	Stan Neumann
---	--------------


If an account has been both disabled and renamed, the annotation will include the original name, followed by the string `DISABLED, RENAMED`; and the new name. (ControlPoint will not consider a renamed account orphaned if it is also active, expired, or locked.)


NOTE: Although it is not a common practice, it is possible for restricted reads and other permissions to be placed on entries in the Active Directory. This can affect ControlPoint's ability to detect disabled accounts. Specifically, if an account has been disabled AND cannot be read by the ControlPoint Service Account, then both SharePoint and ControlPoint will treat that account as valid (not an orphan).

To delete orphaned user permissions from analysis results:

Use the information in the following table to determine the appropriate action to take.

CAUTION: If you have any doubt as whether a user is truly orphaned, it is recommended that before you delete permissions, you verify his/her existence and status in the Active Directory.

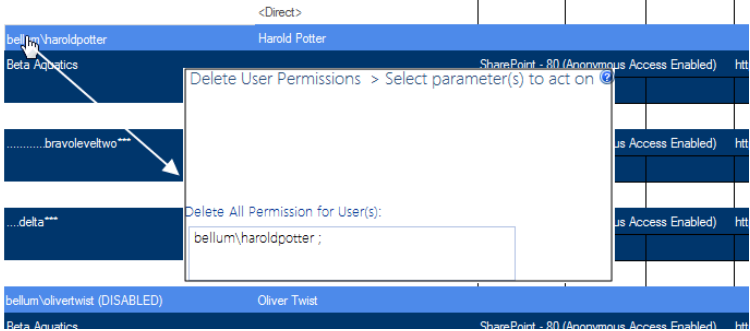If you want to delete permissions for ...	Then ...
a specific orphaned user	<p>click a User hyperlink to initiate a ControlPoint Delete User Permissions action.</p>  <p>The Delete User Permissions page opens in a separate browser window, with the Delete Users field pre-filled with the selected user(s). Note that you need to run the action without validating the user, as the account now longer exists in Active Directory.</p>
all orphaned users as an interactive tasks	click the Delete All hyperlink at the top of the analysis results section.

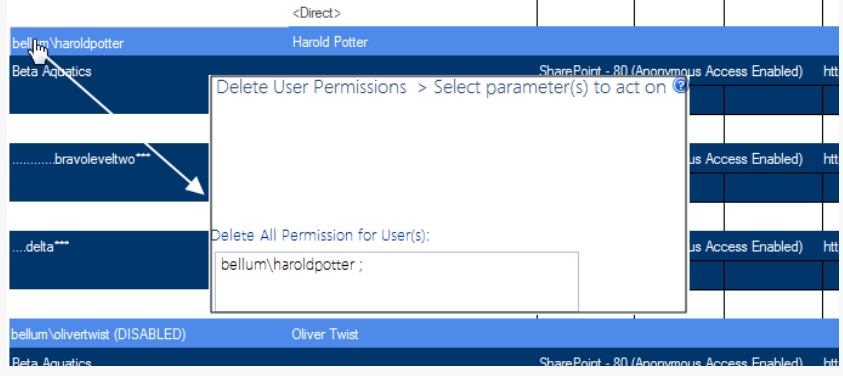If you want to delete permissions for ...	Then ...
	

Analyzing Site Permissions

The Site Permissions analysis lets you examine the permissions that one or more users have for selected sites.

To generate a Site Permission analysis:

- 1 [Select the object\(s\) you want to include in your analysis.](#)
- 2 Choose **Users and Security > Site Permissions**.
- 3 [Specify the parameters for your analysis.](#)

Note that, In addition to the "standard" parameters, you have the option to **Group by** Sites (the default) or Users.



Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)
- OR
- [schedule the operation to run at a later time or on a recurring basis.](#)
- OR
- [save the operation as XML Instructions that can be run at a later time.](#)

Site Permissions analysis results contain the following sections:

- Web Application Policies
- User Rights

- Active Directory group members (if you chose to **Include AD Group Members table.**)

Web Application Policies Section

Depending on how you chose to group results, the top level of the Web Application Policies section lists either the Web application(s) or the users within the scope of your analysis. If grouped by sites, a plus sign (+) in any of the permission columns at the Web application level indicates that at least one user has that permission. If grouped by user, the plus sign indicates that the user has that permission for at least one Web application.

Web Application Policies			Admin	Auditor	System	Full Control	Full Read	Deny Write	Deny All	Other
Web App / User / Zone										
Boston - 22668	exceltest\qserviceacct	(All Zones)	+	+		+				
	exceltest\spsearch	(All Zones)		+			+			
	exceltest\spt services	(All Zones)		+						
	AXCELERTEST\WAP Identity1	(System Account)	+							
	nt authority\local service	(All Zones)		+			+			
SharePoint - 80	exceltest\qserviceacct	(All Zones)	+	+		+				
	exceltest\spsearch	(All Zones)		+			+			
	exceltest\spt services	(All Zones)	+	+		+	+			
	AXCELERTEST\SPT Services	(System Account)	+							
	nt authority\local service	(All Zones)		+			+			

Web Application Policies			Admin	Auditor	System	Full Control	Full Read	Deny Write	Deny All	Other
User / Web App / Zone										
exceltest\qserviceacct	Boston - 22668	(All Zones)	+	+		+				
	SharePoint - 80	(All Zones)	+	+		+				
exceltest\spsearch	Boston - 22668	(All Zones)		+			+			
	SharePoint - 80	(All Zones)		+			+			
exceltest\spt services	Boston - 22668	(All Zones)		+			+			
	SharePoint - 80	(All Zones)	+	+		+	+			
AXCELERTEST\SPT Services	SharePoint - 80	(System Account)	+							
	Boston - 22668	(System Account)	+							
AXCELERTEST\WAP Identity1	Boston - 22668	(All Zones)		+			+			
	SharePoint - 80	(All Zones)		+			+			

The policy permissions within individual Web applications/for individual users (depending on how results are grouped) or for users within the Web application (including any that are zone-specific) displays. A plus sign (+) displays in the applicable column(s), which may include:

- the following policy-level site collection permissions (which indicates that one of the specified policy permission levels has enabled the site collection permissions):
 - **Administrator**
 - **Auditor**
 - **System** settings (for accounts that operates as a system account)

NOTE: Administrator and Auditor are site collection level permissions that a policy level can have. They are set for the Web application via the **SharePoint Manage Permission Policy Levels > Edit Permission Policy Level** page.
- the four built-in SharePoint policy permission levels:
 - **Full Control**
 - **Full Read**
 - **Deny Write**
 - **Deny All**

NOTE: If a user has a custom policy permission level, it is recorded in the **Other** column.

Note that the account in which the Web application's application pool runs is listed with the zone identified as (System Account).

User Rights Section

Depending on how you chose to group results, the top level of the User Rights section lists the Web application(s) or users within the scope of your analysis.

NOTE: If Anonymous Access has been enabled for the Web application, it will be indicated in parentheses following the Web application name.

For each Web application, a list of sites within the Web application displays.

When expanded, a list of users and/or Active Directory groups with permissions for the site collection or site displays, along with the following information:

- the login name of the SharePoint **User**

NOTE: If Anonymous Access has been enabled for the site, **<Anonymous Access>** appears as the first user name

- the user's permission level(s), as indicated by a plus sign (+) in the applicable column(s), which may include:
 - the site collection's **Admin** group
 - the five default SharePoint permission levels:
 - **Full Control**
 - **Design**
 - **Contribute**
 - **Read**
 - **Limited**.

NOTE: If a user has a template-specific or custom permission level, it is recorded in the **Other** column. If Anonymous Access has been enabled for the site, the level of access (**Entire Website, Lists and Libraries, or None**) is recorded in the **Other** column.

User Rights *** - site security not inherited

Select	User	Display Name/Group	Admin	Full Control	Design	Contribute	Read	Limited	Other
	Extranet (Anonymous Access Enabled)								
Select	Customer Portal	http://extranet:28733/sites/Customer Portal							
	axcelertest\jamesjoyce	James Joyce	+	+					
		<Direct>	+						
		Customer Portal Owners		+					
	axcelertest\tester3	Tester3		+					
		<Direct>		+					
Select	Diogenes Patent Attorneys	http://extranet:28733/sites/diogenes							
	axcelertest\isaacasimov	Isaac Asimov		+					
		Diogenes Patent Attorneys Owners		+					
	axcelertest\jamesjoyce	James Joyce	+	+					
		<Direct>	+						
		Diogenes Patent Attorneys Owners		+					
	axcelertest\marktwain	Mark Twain	+	+					

User Rights			*** - site security not inherited						
Select	User	Display Name/Group	Admin	Full Control	Design	Contribute	Read	Limited	Other
	axcelertest\bettygroup2	<axcelertest\bettygroup2>							
Stay Fresh Packaging***	SharePoint - 80 (Anonymous Access Enabled)		http://2010foundation/sites/alpha/stayfresh					
Select		<Summary>		+					
		<Direct>		+					
	axcelertest\crossdomaingroup	<axcelertest\crossdomaingroup>							
	Client List	SharePoint - 80 (Anonymous Access Enabled)		http://2010foundation					
Select		<Summary>				+			
		<Direct>				+			
	axcelertest\development	<axcelertest\development>							
	Help Desk	Intranet		http://2010foundation:40042/sites/Help					
Select		<Summary>		+					
		Help Desk Owners		+					
	Alpha Snack Foods	SharePoint - 80 (Anonymous Access Enabled)		http://2010foundation/sites/alpha					
Select		<Summary>	+						
		<Direct>	+						
Baking Technology***	SharePoint - 80 (Anonymous Access Enabled)		http://2010foundation/sites/alpha/baking					

By default, the report lists:

- users with direct permissions
- users with membership through SharePoint groups, and
- Active Directory groups that either have direct permissions or have been placed into SharePoint groups.

The **Display Name/Group** column shows the display name of each user whose permissions are direct or through membership in a SharePoint group. This name is taken from the Preferred Name field of the SharePoint User Profile, which is typically populated with the Active Directory Display Name. If a display name does not exist for the user, the user's login name will display in brackets < >.

If you chose to **Include Users with AD Group Membership**, users who have permissions through Active Directory groups are listed as separate line items, with name of the Active Directory group displayed in the **Display Name/Group** column.

Select	User	Display Name/Group	Admin
		Help Desk Members	
		Help Desk Owners	
<input type="checkbox"/>	axcelertest\itroupansky	Irene Troupansky	
		axcelertest\development	
<input type="checkbox"/>	axcelertest\jamesjoyce	James Joyce	

If you chose to group by Sites, you can click the **AD** hyperlink to the left of an AD group in the User Rights section to view Active Directory group members.

<Direct>

[Model Site Collection Owners](#)

[george](#)

☐ [axcelertest\george](#)

☐ [axcelertest\qatestgroup](#)

☐ [axcelertest\salessecure](#)

☐ [axcelertest\tester15](#)

☐ [axcelertest\tester4](#)

Group: axcelertest\qatestgroup
Potential SharePoint users

Name	Account Name	Member Of
george	AxcelerTest\george	AxcelerTest\QATestGroup
Tester15	AxcelerTest\Tester15	AxcelerTest\QATestGroup
Tester4	AxcelerTest\Tester4	AxcelerTest\QATestGroup
Tester5	AxcelerTest\Tester5	AxcelerTest\QATestGroup

If you chose to **Include AD Group Members table**, an **Active Directory members** section, which lists each Active Directory group with permissions and all of its members, displays at the end of analysis results.

Active Directory Group Members

Group / User	Total members in AD group
<input type="checkbox"/> axcelertest\bettygroup2	1
<input type="checkbox"/> axcelertest\crossdomaingroup	1
<input type="checkbox"/> axcelertest\development	6
axcelertest\itroupansky	
axcelertest\jamesjoyce	
axcelertest\rosenfeld	
axcelertest\sneumann	
axcelertest\washingtonirving	
axcelertest\williamshakespeare	
<input type="checkbox"/> axcelertest\qatestgroup	4
axcelertest\george	

Analyzing Site Lists Permissions

The Site Lists Permissions analysis lets you examine user permissions for individual lists within a selected site.

NOTE: List permissions are also included as part of the [Comprehensive Permissions analysis](#). You can also view permissions for items within a selected list by running a [Permissions by List Item analysis](#).

To generate a Site Lists Permissions analysis:

- 1 Select the site whose list permissions you want to analyze.

NOTE: You can only analyze list permissions for one site at a time. If you multi-select, only the site on which you right-clicked will apply.

- 2 Choose **Users and Security > Site Lists Permissions**. Use the information in the following table to determine the appropriate action to take.
- 3 [Specify the parameters for your analysis](#).

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

The top level of the Site Lists Permissions analysis shows all of the lists used on the site, along with the following information:

- the **Security** type (Inherited or Unique)
- the number of **Items** in the list
- the number of **Items with Unique Permissions**.

NOTE: If you chose to **Show unique permissions only**, results will include any list that contains *items* with unique permissions (even if the list itself has inherited permissions).

Metalogix Site Lists Permissions axcelertest\testbenchaxceler
3/4/2014 5:25:30 PM

Alpha Snack Foods - http://2010foundation/sites/alpha

Parameters:

Users: ☐ Report does not include Active Directory group members

Unique Permissions: ☐ Show All Permissions

Limit to users with permissions level(s):

User	Display Name/Group	Accessible Items	Admin	Full Control	Design	Contribute	Read	Edit	Limited	Other
Activity Reports		<u>List Security : Inherited; Total Items : 1; Items with Unique Permissions : 0</u>								
Alpha Documents		<u>List Security : Inherited; Total Items : 220; Items with Unique Permissions : 0</u>								
Calendar		<u>List Security : Inherited; Total Items : 6; Items with Unique Permissions : 0</u>								
CP Statistics on remote site		<u>List Security : Inherited; Total Items : 0; Items with Unique Permissions : 0</u>								
Form Templates		<u>List Security : Inherited; Total Items : 0; Items with Unique Permissions : 0</u>								
Issue Tracking List		<u>List Security : Unique; Total Items : 0; Items with Unique Permissions : 0</u>								
Links		<u>List Security : Inherited; Total Items : 6; Items with Unique Permissions : 0</u>								
Now Hear This!		<u>List Security : Inherited; Total Items : 3; Items with Unique Permissions : 0</u>								
Shared Documents		<u>List Security : Unique; Total Items : 150; Items with Unique Permissions : 5</u>								

When expanded, the following information displays for each list:

- each **User** or Active Directory group with permissions to the List item(s)
- if applicable, the SharePoint **Group** via which the user has permissions (users who have direct access are appropriately identified)
- the number of **Accessible Items** for that user, and
- the user's permission level(s). A plus sign (+) displays in the applicable column(s), which may include any of the five default SharePoint permission levels:
 - **Full Control**
 - **Design**
 - **Contribute**
 - **Read**
 - **Limited.**

NOTE: If a user has a template-specific or custom permission level, it is recorded in the **Other** column.

User	Display Name/Group	Accessible Items	Admin	Full Control	Design	Contribute	Read	Edit	Limited	Other	0
List Security : Unique: Total Items : 150: Items with Unique Permissions : 5											
Shared Documents											
accelertest\development	<accelertest\development>			150	+						
accelertest\fscottfitzgerald	<accelertest\fscottfitzgerald>			150	+		+			+	
accelertest\jamesjoyce	<accelertest\jamesjoyce>			150					+	+	
accelertest\margaretmeade	<accelertest\margaretmeade>			150					+	+	
accelertest\renamedtester	<accelertest\renamedtester>			150					+	+	
accelertest\samueldclmens	<accelertest\samueldclmens>			150		+			+	+	
accelertest\testbenchinstall	<accelertest\testbenchinstall>			150	+				+	+	
accelertest\washintonirving	<accelertest\washintonirving>			150	+				+	+	
accelertest\williamshakespeare	<accelertest\williamshakespeare>			150	+	+			+	+	
bellum\administrator	<bellum\administrator>			150		+				+	
bellum\fscottfitzgerald	FScott Fitzgerald			2						+	
bellum\isaacasimov	<bellum\isaacasimov>			150						+	View Only
bellum\jamesjoyce	<bellum\jamesjoyce>			150		+			+	+	
bellum\margaretmeade	<bellum\margaretmeade>			150						+	View Only
bellum\marktwain	<bellum\marktwain>			150						+	View Only
bellum\olivertwist	Oliver Twist			2						+	
bellum\robertheinlein	Robert Heinlein			150		+				+	
bellum\washintonirving	<bellum\washintonirving>			150				+		+	View Only

By default, the report lists:

- users with direct permissions
- users placed into SharePoint groups, and
- Active Directory groups that either have direct permissions or have been placed into SharePoint groups.

The **Display Name/Group** column shows the display name of each user whose permissions are direct or through membership in a SharePoint group. This name is taken from the Preferred Name field of the SharePoint User Profile, which is typically populated with the Active Directory Display Name. If a display name does not exist for the user, the user's login name will display in brackets < >.

User	Display Name/Group
Farmaccount	FarmAccount
Collection	

If you chose to **Expand Active Directory Groups**:

- users who have permissions through Active Directory groups are listed as separate line items, with name of the Active Directory group displayed in the **Display Name/Group** column.

Select	User	Display Name/Group	Admin
		Help Desk Members	
		Help Desk Owners	
<input type="checkbox"/>	accelertest\itroupansky	Irene Troupansky	
		accelertest\development	
<input type="checkbox"/>	accelertest\jamesinove	James Inove	

AND

- an **Active Directory members** section, which lists each Active Directory group with permissions and all of its members, displays at the end of analysis results.

Active Directory Group Members

Group / User	Total members in AD group
<input type="checkbox"/> accelertest\bettygroup2	1
<input type="checkbox"/> accelertest\crossdomaingroup	1
<input type="checkbox"/> accelertest\development	6
accelertest\itroupansky	
accelertest\jamesjoyce	
accelertest\rosenfeld	
accelertest\sneumann	
accelertest\washingtonirving	
accelertest\williamshakespeare	
<input type="checkbox"/> accelertest\qatestgroup	4
accelertest\george	

Analyzing Permissions by List Item

The Permissions by List Item analysis lets you examine user permissions for folders and items within selected lists.

NOTE: List item permissions are also included as part of Comprehensive Permissions analysis.

To generate a Permissions by List Item analysis:

- 1 [Select the list\(s\) whose item permissions you want to analyze.](#)
- 2 Choose **Users and Security > Permissions by List Item**.
- 3 If you want to analyze only specific items within the selected scope, [select the items you want to analyze.](#)
- 4 Specify the parameters for your analysis.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The first row of the result set includes the following information about the list itself:

- an icon that identifies the list type (document library, calendar, task list, etc.).
- the name of the list
- the **List Security** type (Inherited or Unique)
- the number of **Items** in the list
- the number of **Items with Unique Permissions**.

User	Display Name/Group	Accessible Items	Admin	Full Control	Design	Contribute	Read	Limited	Other
SharePoint - 80 (Anonymous Access Enabled)									
Alpha Snack Foods		http://2010foundation/sites/alpha							
 Shared Documents		List Security : Unique; Total Items : 150; Items with Unique Permissions : 5							

When the first row is expanded, each user with permissions for the list is displayed, along with the following information:

- the name of the SharePoint **User**
- the number of **Accessible Items** (that is, the number of items within the list for which the user has permissions)
- the user's permission level(s) for the list itself, as indicated by a plus sign (+) in the applicable column(s), which may include:
 - the site collection's **Admin** group
 - the five default SharePoint permission levels:
 - **Full Control**
 - **Design**
 - **Contribute**
 - **Read**
 - **Limited**.

NOTE: If a user has a template-specific or custom permission level, it is recorded in the **Other** column.

User	Display Name/Group	Accessible Items	Admin	Full Control	Design	Contribute	Read	Edit	Limited	Other
SharePoint - 80 (Anonymous Access Enabled)										
Alpha Snack Foods http://2010foundation/sites/alpha										
Shared Documents	List Security : Unique; Total Items : 151; Items with Unique Permissions : -5									
bellum\administrator	<bellum\administrator>			+		+			+	
	<Direct>								+	
bellum\agathachristie	Agatha Christie					+			+	
	Alpha Snack Foods Members					+			+	
bellum\scottfitzgerald	FScott Fitzgerald					+			+	
	Viewers								+	
bellum\miller	Henry Miller			+	+	+			+	
	Alpha Snack Foods Members					+			+	
bellum\isaacasimov	Isaac Asimov					+			+	View Only
	<Direct>								+	
bellum\jamesjoyce	James Joyce			+		+			+	
	<Direct>								+	
bellum\margaretmeade	Margaret Meade					+			+	View Only
	<Direct>								+	
bellum\marktwain	Mark Twain			+		+			+	
	<Direct>								+	

The remaining rows contain detailed permissions information for each folder and item within the list.

Click a list, folder, or item name to open the SharePoint Permissions page.

Analyzing Comprehensive Permissions

The Comprehensive Permissions analysis shows the permissions that users have to selected sites as well as lists (and optionally, list items) within those sites.

If you want to analyze site-level permissions only (with the option of drilling down to list permissions for each user individually), you can run a [Site Permissions analysis](#) instead.

NOTE: The Comprehensive Permissions analysis always uses real-time (not cached) data.

To generate a Comprehensive Permissions analysis:

- 1 [Select the object\(s\) on which you want to perform the analysis](#).
- 2 Choose **Users and Security > Comprehensive Permissions**.
- 3 [Specify the parameters for your analysis](#).

Note that, In addition to the "standard" parameters, you have the option to **Group by** Sites (the default) or Users.



NOTE: By default, permissions for list items are excluded from the analysis. You can, however, chose to Include **List Items**. Be aware however, that processing time may increase significantly.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Comprehensive Permissions analysis results consist of the following sections:

- Web Application Policies
- User Rights.

Web Application Policies Section

The information in the Web Application Policies section is the same as that found in the [Site Permissions analysis](#).

User Rights Section

In addition to the same site-level permissions (Site Security) shown in the [Site Permissions analysis](#), the User Rights section also shows the same list-level and optionally, item-level permissions (List Security) shown in the [Site Lists Permissions analysis](#).

Analyzing Comprehensive Information About SharePoint Users

The Comprehensive User Report contains the following information about one or more SharePoint users:

- permissions that the user has for sites, lists, and list items
- workflows created by the user
- documents created by, last modified by, and checked out to the user
- SharePoint alerts that have been created for the user
- open tasks assigned to the user, including workflow tasks
- membership in both SharePoint and Active Directory groups.

To generate a Comprehensive User Report:

- 1 [Select the object\(s\) for which you want to view comprehensive user information](#)
- 2 Choose **Users and Security > Comprehensive User Report**.

3 [Select the user\(s\) whose comprehensive information you want to analyze.](#)

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Comprehensive User Information Report results consist of the following sections:

- Web Application Policies
- User Rights
- Documents Created By, Last Modified By, and Checked Out to User
- SharePoint Alerts by Site
- Workflows Created
- Open Tasks
- User Groups

Web Application Polices and User Rights Sections

The information in the Web Application Polices and User Rights sections is the same as that found in the [Comprehensive Permissions analysis](#).

Documents Created By, Last Modified By, and Checked Out to User Section

This section lists each of the documents created by, last modified by, and checked out to the user and includes the name of the **Web Application**, **Site**, and **List** where the document is located.

[Marketing](#) +

Documents Created By, Last Modified By, and **Checked Out To** ###- Documents which have no checked-in version

Document Name	Web Applications	Site	List
Documents Created			
<input type="checkbox"/> axcelertest\jamesjoyce			
default	Clientsjamejoyce	Master Page Gallery
v4	Clientsjamejoyce	Master Page Gallery
minimal	Clientsjamejoyce	Master Page Gallery
Home	Clientsjamejoyce	Site Pages
How To Use This Library	Clientsjamejoyce	Site Pages
default	ClientsJames Joyce creates subsite	Master Page Gallery
v4	ClientsJames Joyce creates subsite	Master Page Gallery
minimal	ClientsJames Joyce creates subsite	Master Page Gallery
Documents Last Modified			
<input type="checkbox"/> axcelertest\jamesjoyce			
default	Clientsjamejoyce	Master Page Gallery
v4	Clientsjamejoyce	Master Page Gallery
minimal	Clientsjamejoyce	Master Page Gallery
Home	Clientsjamejoyce	Site Pages
How To Use This Library	Clientsjamejoyce	Site Pages
default	ClientsJames Joyce creates subsite	Master Page Gallery
Documents Checked Out			
<input type="checkbox"/> axcelertest\jamesjoyce			
ProfitabilityAnalysis	SharePoint - 80	Alpha Snack Foods	Alpha Documents
Questions for The Chief	SharePoint - 80Stay Fresh Packaging	Shared Documents

SharePoint Alerts by Site Section

This section lists SharePoint alerts that have been created for the user for each site within the scope of your analysis, including the **Web Application**, **Site**, and url for which the alert is set.

When expanded, the following additional information displays:

- alert **Type** (List or Item)
- **Event Filter** that triggers the alert
- **Frequency** of the alert
- if the frequency is other than immediate, the date and time of the **Next Alert**

- the alert **Filter**

SharePoint Alerts by User

Select	User / Site / Alert	Web Application / List / Item	Type	Event Type	Frequency / Filter	Next Alert
i:0#.w axcelertest\jamesjoyce						
	Help Desk	Clients			http://clients/sites/Help	
	New Document Added	Circulations	List	Add	Daily	Anything changes 3/19/2014 7:00:00 AM
	New Document Added	Tasks	List	Add	Daily	Anything changes 3/19/2014 7:00:00 AM
	New Document Added	Team Discussion	List	Add	Daily	Anything changes 3/19/2014 7:00:00 AM
	New Document Added	Group Calendar	List	Add	Daily	Anything changes 3/19/2014 7:00:00 AM
	New Document Added	Shared Documents	List	Add	Daily	Anything changes 3/19/2014 7:00:00 AM

Running Workflows Created Section

The Running Workflows Created section lists all of the workflows created by the user that have at least one instance currently running. Information about the workflow includes:

- Workflow** name
- the number of **Running Instances**
- A **Description** of the workflow.

When expanded, the following additional information about the workflow displays:

- the workflow's **Associated Item**
- a link to a **Summary** of all workflows associated with the **Document**
- the **List** for which the workflow was created
- the **Site** and **Web Application** where the list is located.

Running Workflows Created

Workflow / Associated Item	Document	Running Instances / List	Description / Site	Web Applications
i:0#.w axcelertest\jamesjoyce				
Workflow		2	Use this workflow to track items in a list.	
RiskAssessment.doc	Summary	Alpha Documents	Alpha Snack Foods	SharePoint - 80
Content Matrix Release Notes.pdf	Summary	Alpha Documents	Alpha Snack Foods	SharePoint - 80
Compliance Review		3	Use this workflow to track items in a list.	
SharePointPlanning.doc	Summary	Alpha Documents	Alpha Snack Foods	SharePoint - 80
Alpha Documents Workflow		1	Use this workflow to track items in a list.	
Content Matrix Release Notes.pdf	Summary	Alpha Documents	Alpha Snack Foods	SharePoint - 80

Open Tasks Section

The Open Tasks section lists all of the workflow-associated open tasks that have been assigned to the user, including:

- the **Task Name** and **Status**
- the **Task Created Date** and time
- the **Task Type**
- the **Associated Workflow** for the task
- the **Task Description**

User Groups Section

The User Groups section lists the **Active Directory Groups** and **SharePoint Groups** of which the user is a member.

SharePoint Groups and Active Directory Groups

SharePoint Groups	Site
■ AXCELERTEST\jamesjoyce	
Alpha Snack Foods Members	Alpha Snack Foods
Alpha Snack Foods Owners	Alpha Snack Foods
Compliance	Alpha Snack Foods
Sales	Alpha Snack Foods
Stay fresh	Alpha Snack Foods
Viewers	Alpha Snack Foods
Customer Portal Owners	Customer Portal
Diogenes Patent Attorneys Owners	Diogenes Patent Attorneys
Help Desk Members	Help Desk
Operations Owners	Operations

Analyzing SharePoint Groups

The SharePoint Groups Analysis provides details about membership and permissions of SharePoint groups within one or more site collections and/or sites.

To generate a SharePoint Groups analysis:

- 1 [Select the object\(s\) for which you want to analyze SharePoint groups.](#)
- 2 Choose **Users and Security > SharePoint Group Analysis**.
- 3 Specify the parameters for your analysis.

In addition to the "standard" parameters for permissions analyses, you can limit results to:

- SharePoint groups whose name include a specific text string

- groups **with no members** and/or **with no permissions** or only groups with both **members and permissions**

NOTE: Currently, you can only report on groups with no permissions if the ControlPoint Configuration Setting "Show SharePoint Groups with No Permissions in Hierarchy" is set to *true*. (See the *ControlPoint Administration Guide* for details.)

You can also choose whether to **Include lists and list items** in results.

CAUTION: If you chose to include lists and list items, the analysis may take significantly longer to run and may generate a much larger set of results.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The SharePoint Group Analysis consists of the following sections:

- Membership
- Permissions

Membership Section

The Membership section lists each site collection within the scope of your analysis.

When expanded the following information displays:

- each **SharePoint Group** within the site collection
- the **No of users** in the group.

- a plus sign (+) identifying each group that **Has Permissions**.

Membership

SharePoint Group	Member	Display Name	No of Users	Has Permissions
■ SharePoint - 80 (Anonymous Access Enabled)				
▢ Alpha Snack Foods				
▢ Alpha Snack Foods Members			5	+
▢ Alpha Snack Foods Owners			6	+
▢ Alpha Snack Foods Visitors			4	+
	bellum\isaacasimov	<bellum\isaacasimov>		
	bellum\margaretmeade	<bellum\margaretmeade>		
	bellum\marktwain	<bellum\marktwain>		
	bellum\washingtonirving	Washington Irving		
▢ Baking Technology - Full Control			2	
▢ Compliance			2	
	BELLUM\isaacasimov	Isaac Asimov		
	BELLUM\robertheinlein	Robert Heinlein		

When expanded, each **Member** login name and **Display Name** is listed.

Membership

SharePoint Group	Member	Display Name	No of Users	Has Permissions
■ SharePoint - 80 (Anonymous Access Enabled)				
▢ Alpha Snack Foods				
▢ Alpha Snack Foods Members			5	+
▢ Alpha Snack Foods Owners			6	+
▢ Alpha Snack Foods Visitors			4	+
	bellum\isaacasimov	<bellum\isaacasimov>		
	bellum\margaretmeade	<bellum\margaretmeade>		
	bellum\marktwain	<bellum\marktwain>		
	bellum\washingtonirving	Washington Irving		
▢ Baking Technology - Full Control			2	
▢ Compliance			2	
	BELLUM\isaacasimov	Isaac Asimov		
	BELLUM\robertheinlein	Robert Heinlein		

Note that an Active Directory group is counted as a single user.

Permissions

	SharePoint Group	Full Control	Design	Contribute	Read	Edit
■ SharePoint - 80 (Anonymous Access Enabled)						
Select	▢ Alpha Snack Foods	http://2010foundation/sites/alpha				
Select	▢Stay Fresh Packaging	http://2010foundation/sites/alpha/stayfresh				

Permissions Section

The Permissions section lists each site within the scope of your analysis.

Permissions

	SharePoint Group	Full Control	Design	Contribute	Read	Edit
■ SharePoint - 80 (Anonymous Access Enabled)						
Select	Alpha Snack Foods	http://2010foundation/sites/alpha				
SelectStay Fresh Packaging	http://2010foundation/sites/alpha/stayfresh				

When expanded, a Site Security summary row indicates whether site security is Inherited or Unique. Each SharePoint Group within the site is listed, along with a plus sign (+) identifying each of its permissions. Any custom permissions levels are recorded in the **Other** column.

Permissions

	SharePoint Group	Full Control	Design	Contribute	Read	Edit	Limited	Other
■ SharePoint - 80 (Anonymous Access Enabled)								
Select	Alpha Snack Foods	http://2010foundation/sites/alpha						
	Alpha Snack Foods							
	Site Security	Site Security : Inherited						
	Marketing	+						
	Viewers							+
	Alpha Snack Foods Members							+
	Alpha Snack Foods Owners	+						+
	Alpha Snack Foods Visitors							+
								View Only
SelectStay Fresh Packaging	http://2010foundation/sites/alpha/stayfresh						
Stay Fresh Packaging							
	Site Security	Site Security : Unique						
	Sales	+						+
	Stay fresh							Gails PermissionLevel
	Viewers							+
	Alpha Snack Foods Members							+
	Alpha Snack Foods Owners	+						+
	Alpha Snack Foods Visitors							+

Note that in the following example, the external user is identified by his external email address.

□	...BUG7013***		https://metalogixsoftware622.sharepoint.com/sites/Carlo					
□	cpdevuser1@metalogixsoftware622.onmicrosoft.com	CP Dev User1		+				
		<Direct>		+				
□	live.com#adolfo_luis_9@hotmail.com	Luis Salvatierra						+
		BUG7013 Visitors						+
□	testadmin@metalogixsoftware622.onmicrosoft.com	Test Admin						

Analyzing Permissions Changes

If you use ControlPoint to [back up site permissions](#), you can compare permission changes within a single site, either between current permissions and a backup created at a specific date and time or from two backups created at different dates and times.

The analysis shows changes to:

- individual user permissions that have been granted directly
- permissions granted to SharePoint and Active Directory groups.

NOTE: Currently, this analysis does not identify changes to “effective permissions” (which, in SharePoint, refers to permissions granted as a side-effect of a granted permission). That is, changes to an individual’s permissions based solely on addition to or deletion from a SharePoint or Active Directory group will not be reflected in analysis results.

To analyze permissions changes:

- 1 [Select the site whose permissions changes you want to analyze.](#)
- 2 Choose one of the following options (depending on how you want results to be grouped):

- **Users and Security > Permissions Changes by Site.**

OR

- **Users and Security > Permissions Changes by User.**

- 3 [Specify the parameters for your analysis.](#)

In addition to "standard" parameters:

- You must select a **Compare permissions from** and **Compare permissions to** date and time.

NOTE: You can only select backups that were created in ControlPoint version 4.6 or later.

Permissions Changes by Site

Selection | Parameters | Schedule | Results Run Now Reset Save

Compare permissions from backup on: 1/11/2013 11:31:59 AM

Compare permissions to: <Select>

Select users (blank for all):

Limit to users with permissions level(s): Any, Full Control, Contribute, Design, Limited Access, Read

Limit by List or Item Level Permissions:

☐ Open drill-downs in new window

- If you want to view only users whose permissions have changed, check the **Show only users with permissions changes** box.

NOTE: If you leave this box unchecked, all users will be included in the analysis, regardless of whether their permissions have changed.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Analysis results contain the same information as the User Rights section of the [Comprehensive Permissions analysis](#), except that, for the time period covered by the analysis:

- permissions that have been deleted are identified by a red **D**, and
- permissions that have been added are identified by a green **A**.

Metalogix

Permissions Changes by Site

axcelertest\testbenchaxcel
3/5/2014 5:39:06 PM

Parameters:

Users: Report does not include Active Directory group members

Limit to users with permissions level(s): Any

User Rights

A - added
D - deleted

Select	User	Display Name/Group	Admin	Full Control	Design	Contribute	Read	Limited	Other
SharePoint - 80									
Select	<div><div>....Skunkworks Project</div><div>http://2010foundation/sites/alpha/skunkworks</div><div>....Skunkworks Project</div><div>Site Security</div><div>Site Security : Unique</div><div>AXCELERTEST\bettygroup2 <Direct> D</div><div>axcelertest\development A</div><div>axcelertest\fscottfitzgerald (FScott Fitzgerald) A</div><div>axcelertest\jamesjoyce (James Joyce) Sales D D</div><div>Viewers D D View Only-[D]</div><div>axcelertest\margaretmeade (Margaret Meade) Alpha Snack Foods Members D D</div><div>axcelertest\renamedtester (Rename Alpha Snack Foods Members D D</div></div>								

Generating a User To Group Analysis

The ControlPoint User to Group Analysis lets you compare user direct permissions within one or more site collections with comparable SharePoint and/or Active Directory groups. You can use this analysis to identify users who should be moved into groups—as well as potential groups into which they can be moved (that is, groups that have the same permissions or fewer)—in accordance with SharePoint best practices via the [Clean-up User Permissions action](#).

NOTE: This analysis is only available at the site collection level of the hierarchy. However, your selection may include more than one site collection.

To generate a User to Group Analysis:

- 1 [Select the site collection\(s\) you want to include in your analysis.](#)
- 2 Choose **Automation > User to Group Analysis**.
- 3 [Select the user\(s\) whose permissions you want to analyze.](#)
- 4 If different from the default (**Include SharePoint Groups** only), check/uncheck the appropriate option(s) to **Include Active Directory Groups** only or both **Include SharePoint** and **Include Active Directory Groups**.

NOTE: At least one of these options must be checked.

User to Group Analysis > Select parameter(s) to act on ⓘ

[Next, select Run Now](#)

Select users(author) (blank for all):



- ☒ Include Sharepoint Groups
- ☐ Include Active Directory Groups
- ☒ Display with results expanded

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

The User to Group Analysis consists of the following sections:

- User Rights
- Group Permissions

User Rights Section

The User Rights section lists each Web application, site collection and user within the scope of your analysis, along with

- SharePoint groups that have permissions that correspond to the user's direct permissions, and

- the number of unique (non-inherited) direct permissions that the user has for objects within the site collection.

User Rights									
Select	User	Display Name/Group	Admin	Full Control	Design	Contribute	Read	Limited	Other
HPWAP01 - 10403									
SC01									
	axcelertest\flsgrp001	<axcelertest\flsgrp001>	Groups: TeamSite Visitors						Direct Permissions: 3
	axcelertest\fscoffitzgerald	FScoff Fitzgerald	Groups: No matching groups found for user						Direct Permissions: 1
	axcelertest\gb test1	GB Test1	Groups: axcelertest\gbondadbagroup1,axcelertest\gbondgroup2,TeamSite Members,TeamSite Owners						Direct Permissions: 9
	axcelertest\gbondadbagroup1	<axcelertest\gbondadbagroup1>	Groups: axcelertest\gbondgroup2,TeamSite Owners						Direct Permissions: 3
	axcelertest\gbondgroup2	<axcelertest\gbondgroup2>	Groups: axcelertest\gbondadbagroup1,TeamSite Owners						Direct Permissions: 3
	axcelertest\jamesjoyce	James Joyce	Groups: No matching groups found for user						Direct Permissions: 0

When expanded, each of the individual objects for which the user has unique direct permissions display, along with the corresponding Permissions Level(s).

Select	User	Display Name/Group	Admin	Full Control	Design	Contribute	Read	Limited	Other	
HPWAP01 - 10403										
SC01										
	axcelertest\flsgrp001	<axcelertest\flsgrp001>	Groups: TeamSite Visitors					Direct Permissions: 3		
	axcelertest\fscoffitzgerald	FScott Fitzgerald	Groups: No matching groups found for user					Direct Permissions: 1		
	axcelertest\gb test1	GB Test1	Groups: axcelertest\gbondadbagroup1,axcelertest\gbondgroup2,TeamSite Members,TeamSite Owners					Direct Permissions: 9		
Select	TeamSite	http://qa2010farmvm2:10403/sites/SC01/testcopy_nocontent								
	TeamSite									
	Site Security					+	+	Contribute - add and view only		
Select	TeamSite	http://qa2010farmvm2:10403/sites/SC01/testcopy_nocontent1								
	TeamSite									
	Site Security					+	+	Contribute - add and view only		
Select	TeamSite	http://qa2010farmvm2:10403/sites/SC01/testcopy_nocontent33								
	TeamSite									
	Site Security					+	+	Contribute - add and view only		

Group Permissions Section

The Group Permissions sections lists all of the SharePoint and/or Active Directory groups within each site collection.

Group Permissions									
Select	Group	Display Name/Group	Full Control	Design	Contribute	Read	Limited	Other	
HPWAP01 - 10403									
SC01									
	Perms Management Sync Level								
	SC01 Members								
	SC01 Owners								
	SC01 Visitors								
	TeamSite Members								
	TeamSite Owners								
	TeamSite Visitors								
	Viewers								

When expanded, each of the objects (sites, lists, folders, and items) for which the user has unique direct permissions, along with the corresponding permissions level(s).

Group Permissions						
Select	Group	Display Name/Group	Full Control	Design Contribute	Read Limited	Other
	HPWAP01 - 10403					
	SC01					
	Perms Management Sync Level					
Select		SC01	http://qa2010farmvm2:10403/sites/SC01			
		SC01				
		Site Security	+			
	SC01 Members					
Select		SC01	http://qa2010farmvm2:10403/sites/SC01			
		SC01				
		Site Security	+			
		Shared Documents	List Security : Unique; Total Items : 3; Items with Unique Permissions : 0			
		List Security	+			

You can use the information in this analysis to help you with [cleaning up user permissions](#).


The ControlPoint Task Audit

The ControlPoint Task Audit is an analysis tool that summarizes one or more of the ControlPoint actions that have been performed by administrators over a specified time period.

By default, the Task Audit report is accessible from the Manage ControlPoint panel. An action-specific Task Audit Report is also displayed automatically after a ControlPoint action is carried out.

NOTE: In a multi-farm installation, the Task Audit includes actions performed on both home and remote farms.

To generate a Task Audit:

- From the Manage ControlPoint panel, choose **Schedule Management and Logging > ControlPoint Task Audit**.
- Specify the following parameters for your analysis:
 - Either
 - Enter the **StartDate** and **EndDate**, or
 - click the Calendar icon () and select the date(s).
 - (Optional) If you want to search for a specific text string, complete the **Search for** field. You can enter a full or partial:
 - site name or url
 - action name, or
 - action description


For example, by entering the words "Site Theme" in the **Search for** field, your results will be limited to tasks that involved modifying a site theme.

Search for:

Select an **Administrator** from the drop-down. (If you want report results to include all administrators in the list, select <ALL>).

Note that the drop-down list includes only administrators who have performed a ControlPoint action within that farm.

- Select a **Task Type** from the drop-down.

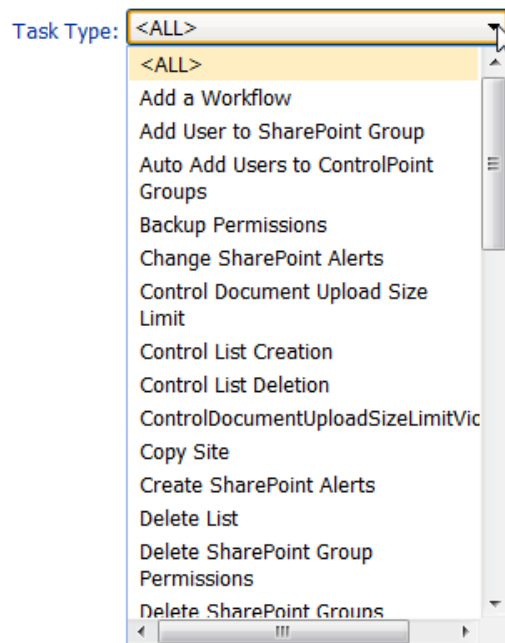

NOTE: The Task Type list is populated with the types of actions that have actually been performed by administrators. For example, if a Delete User Permissions action has never been performed, it will not appear in the list. If you want to include all available options in the report results, select <ALL>.

If you chose the Run Now, option, after the operation has been processed:

- a confirmation message displays at the top of the page, and
- a ControlPoint Task Audit is generated for the operation and displays in the Results section.

If you schedule the operation, a link to the Task Audit is included in the scheduled action notification email.

See also [The ControlPoint Task Audit](#).

Information in the Task Audit Report

The Task Audit Report contains the following information for each task:

- the **Task Type**
- the username of the administrator that the task was **Performed by**
- the **Date** and time when the task was performed, and
- a summary of the parameters chosen for the action.

Metalogix

Task Audit

3/6/2014 11:21:02 AM

Parameters:

Start Date: 3/1/2014

End Date: 3/6/2014

Task Type: <ALL>

Performed By: <ALL>

Search Criteria: Permissions

Total Tasks: 4

Task Type	Performed By	Date
Delete User Permissions	axcelertest\testbenchaxceler	3/3/2014 3:23 PM
[-] USERS: AXCELERTEST\development;AXCELERTEST\patentattorneys;AXCELERTEST\salessecure TYPE: SITE		
Manage Permissions Inheritance	axcelertest\testbenchaxceler	3/4/2014 5:19 PM
[-] OPERATION: Break Inheritance - Copy Permissions from Parent		
Manage Permissions Inheritance	axcelertest\testbenchaxceler	3/4/2014 5:22 PM
[-] OPERATION: Restore Inheritance		
Manage Permissions Inheritance	axcelertest\testbenchaxceler	3/4/2014 5:24 PM
[-] OPERATION: Break Inheritance - Copy Permissions from Parent		

Total Tasks: 4

When expanded, a more detailed description of a task displays, which lists:

- site collections or sites on which the action was carried out, and
- any special notes or errors (such as "*Security is inherited - no processing is done*").

Task Type	Performed By	Date
Delete User Permissions	axcelertest\testbenchaxceler	3/3/2014 3:23 PM
[-] USERS: AXCELERTTEST\development;AXCELERTTEST\patentattorneys;AXCELERTTEST\salessecure TYPE: SITE		
Performed On	URL	Path
Alpha Snack Foods	http://2010foundation/sites/alpha	2010SharePoint > SharePoint - 80 > Alpha Snack Foods >> Alpha Snack Foods
User AXCELERTTEST\Development permissions have been removed from the Root Site Alpha Snack Foods		
User AXCELERTTEST\patentattorneys permissions have been removed from the Root Site Alpha Snack Foods		
User AXCELERTTEST\SalesSecure permissions have been removed from the Root Site Alpha Snack Foods		
Manage Permissions Inheritance	axcelertest\testbenchaxceler	3/4/2014 5:19 PM
[-] OPERATION: Break Inheritance - Copy Permissions from Parent		
Performed On	URL	Path
***Issue Tracking List	http://2010foundation/sites/alpha	2010SharePoint > SharePoint - 80 > Alpha Snack Foods >> Alpha Snack Foods
Permissions inheritance has been broken and the parent's permissions have been copied for the list		
***Shared Documents	http://2010foundation/sites/alpha	2010SharePoint > SharePoint - 80 > Alpha Snack Foods >> Alpha Snack Foods
Permissions inheritance has been broken and the parent's permissions have been copied for the list		
Manage Permissions Inheritance	axcelertest\testbenchaxceler	3/4/2014 5:22 PM
[-] OPERATION: Restore Inheritance		
Performed On	URL	Path
Issue Tracking List	http://2010foundation/sites/alpha	2010SharePoint > SharePoint - 80 > Alpha Snack Foods >> Alpha Snack Foods
Permissions inheritance has been restored for the list		

Note that:

- As with other ControlPoint analyses, only actions taken on sites you have permissions to manage within ControlPoint display in audit report results.
- Sites for which the administrator who performed the action does not have permissions to manage are not acted upon, and therefore are not captured in the audit report.

Viewing Logged Errors

The Logged Errors Report lets you view the contents of the ControlPoint Services (xcAdmin) database error log for a specified date range. You can use this detail with guidance from [Quest Support](#) to diagnose potential issues in your environment.

To view logged errors:

- 1 From the Manage ControlPoint panel, choose **Schedule Management and Logging > Logged Errors Report**.
- 2 Select a **Start date** and **End date** representing the time period for which you want to view logged errors.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis](#).

OR

- [save the operation as XML Instructions that can be run at a later time](#).

Logged Error Report results contain a time-stamped entry for each error logged within the specified date range, followed by detailed error text.

Date	User	Source
6/8/2015 3:54:15 AM	bellum\administrator	
<div> <div></div> <div>ID #: 213: Connection LOGDB is not available</div> </div> <div> <div>Stack:</div> <div> at Axceler.Datalayer.xcDataManager.GetSqlConnection(String name, Boolean throwException) at Axceler.Datalayer.xcDataManager.#vcb(String #9) at Axceler.Datalayer.xcDataManager.GetDatareaderWParms(String connName, String sSQL, Dictionary`2 hshPam, Nullable`1 type) at Axceler.Datalayer.xcDataManager.GetDatareaderWParms(String connName, String sSQL, Dictionary`2 hshPam) at xcCore.Reports.ReportsCommon.getPartionsList(DateTime dtstart, DateTime dtend, WebDataManager dbman, String Connname) at xcCore.Reports.ReportsCommon.GetActivityInt(String type, String dtstart, String dtend, String sGuid, String siteGuid, WebDataManager dbman, DateTime& MinDate, DateTime& LastAccessed, Boolean isLoggingConnection) at xcCore.Reports.ReportsCommon.GetActivity(String type, String dtstart, String dtend, String sGuid, String siteGuid, WebDataManager dbman, DateTime& MinDate, DateTime& LastAccessed, Boolean isLoggingConnection) at Axceler.Core.Logic.Operations.DiscoveryOperation.GetActivities(String SiteId, String processDate, WebDataManager dbman, Boolean isLoggingConnection) at Axceler.Core.Logic.Operations.DiscoveryOperation.UpdateAnalytics(String SiteId, String processDate, WebDataManager dbman, Boolean isLoggingConnection) at xcCore.Logic.Traverse.PopulateActivityColumns(DataRow workRow, Boolean renewRow, SPsite spSiteColl, Boolean isANLAvailable, Boolean isLoggingConnection) </div> </div>		
6/8/2015 3:54:15 AM	bellum\administrator	
<div> <div></div> <div>ID #: 214: Connection LOGDB is not available</div> </div> <div> <div>Stack:</div> <div> at Axceler.Datalayer.xcDataManager.GetSqlConnection(String name, Boolean throwException) at Axceler.Datalayer.xcDataManager.#vcb(String #9) at Axceler.Datalayer.xcDataManager.GetDatareaderWParms(String connName, String sSQL, Dictionary`2 hshPam, Nullable`1 type) at Axceler.Datalayer.xcDataManager.GetDatareaderWParms(String connName, String sSQL, Dictionary`2 hshPam) at xcCore.Reports.ReportsCommon.getPartionsList(DateTime dtstart, DateTime dtend, WebDataManager dbman, String Connname) at xcCore.Reports.ReportsCommon.GetActivityInt(String type, String dtstart, String dtend, String sGuid, String siteGuid, WebDataManager dbman, DateTime& MinDate, DateTime& LastAccessed, Boolean isLoggingConnection) at xcCore.Reports.ReportsCommon.GetActivity(String type, String dtstart, String dtend, String sGuid, String siteGuid, WebDataManager dbman, DateTime& MinDate, DateTime& LastAccessed, Boolean isLoggingConnection) at Axceler.Core.Logic.Operations.DiscoveryOperation.GetActivities(String SiteId, String processDate, WebDataManager dbman, Boolean isLoggingConnection) at Axceler.Core.Logic.Operations.DiscoveryOperation.UpdateAnalytics(String SiteId, String processDate, WebDataManager dbman, Boolean isLoggingConnection) at xcCore.Logic.Traverse.PopulateActivityColumns(DataRow workRow, Boolean renewRow, SPsite spSiteColl, Boolean isANLAvailable, Boolean isLoggingConnection) </div> </div>		

Scheduling a ControlPoint Operation

The ControlPoint scheduler lets you set up ControlPoint operations to run in the background at a specified date and time, such as when system resource usage is low. Depending on your ControlPoint permissions, you can schedule:

- an Advanced Search
- any ControlPoint analysis
- most ControlPoint actions.

This feature is especially useful for:

- operations that might take a significant amount of time to complete (such as a an analysis run on a large farm)
- operations that you want to run during off-peak hours (such as moving an active site)
- enforcing corporate or regulatory policies (for example, by ensuring that user permissions are always set at the proper levels)
- analyses that you want to run and distribute on a regular basis (such as weekly site activity or storage usage).

Results of scheduled ControlPoint analyses can be sent to email distribution lists and/or posted to a SharePoint document library as a .pdf, an Excel formatted spreadsheet, or a csv file. Individual data sets within analyses can also be saved as SharePoint lists for use in creating dashboards.

ControlPoint uses a different (typically larger) limit on the number of line items that can be returned when an analysis is run on a scheduled basis than when run interactively. ControlPoint Application Administrators can, however, modify this limit.

NOTE: In a multi-farm installation, operations can only be scheduled for the home farm.

How Scheduled Jobs are Handled

The ControlPoint scheduler is driven by a SharePoint timer task, called the ControlPoint Scheduled Job Review. This task both checks for and initiates the scheduled jobs. By default, the timer task performs these activities every time it runs (by default, every 10 minutes). ControlPoint Application Administrators can, however, override this default so that the running of scheduled jobs is performed at less frequent intervals. See "Number of Minutes Scheduler Will Wait Before Next Group of Jobs (OVERRIDE SCHEDULE TIMER MINUTES)" in the *ControlPoint Administration Guide*.

By default, up to five scheduled jobs can be running at any given time. ControlPoint Application administrators can, however, change this default value to allow more—or fewer—jobs to run concurrently. See "Maximum Number of Scheduled Jobs to Submit at One Time (MAXSUBMIT)" in the *ControlPoint Administration Guide*.

Scheduling a Recurring Analysis for Which a Specific Date Range or Time Period was Selected

If a ControlPoint analysis is scheduled to run on a recurring basis and includes a date range or time period, the ControlPoint scheduler will interpret it as a relative date range or time period (that is, relative to the date when the scheduled job is run). The first time the scheduled job runs, the analysis will cover the date range specified in the Parameters section. For subsequent job runs, the date range will be updated accordingly.

EXAMPLES:

- If you initiate an Audit Log analysis on a Monday for a date range that covers the the previous week, then schedule it to run on a recurring basis:

Audit log Analysis ⓘ

General Job Information

Job Name

Weekly Audit Log

☒ Active

Description

Output File Name

xcrAuditReport<TS>

Output Type

PDF

☒ Include Date Time stamp in file name ⓘ

Schedule Details

Start

10/5/2015 11:16 AM

☒ Recurring ⓘ

Run Every

1

Week(s)

Until

1/1/2016 12:16 PM

- the first time the scheduled job runs, the analysis will include data for the first week in January (that is, the week you specified)

Metalogix

Audit Log (9/28/2015 12:00 AM to 10/2/2015 12:00 AM)

bellumjamesjoyce

10/5/2015 11:30:00 AM

Parameters:

User:

List:

URL:

Event:

Check Out

Scope:

Document

Read From Archive:

No

Total : 1

Date	User	Event	Scope	Site Collection	Site	URL
10/1/2015 4:58:23 PM	System Account	Check Out	Document	Alpha Snack Foods	Alpha Snack Foods	sites/alph Document

Version -> Major: 1 | Minor: 0 |

W/AP: She

- the second time the scheduled job runs (at the end of the following week), the analysis will include data for the second week in January

Metalogix

Audit Log (10/5/2015 12:00 AM to 10/9/2015 12:00 AM)

bellumjamesjoyce
10/12/2015 11:00:21 AM

Parameters:

User: _____ List: _____

URL: _____

Event: Check Out

Scope: Document

Read From Archive: No

- and so on.
- If you schedule a SharePoint Summary Report to run every 30 days, the analysis will include activity that occurred 30 days ending on the date the scheduled job runs, regardless of the date on which the report was initiated.

Creating a Scheduled Job

To schedule a ControlPoint operation:

- 1 After initiating and specifying the parameters for a ControlPoint operation, open the **Schedule** section.

Audit log Analysis ⓘ

SELECTION

PARAMETERS

SCHEDULE

RESULTS

General Job Information

Job Name ☒ Active

Description

Output File Name Output Type

☐ Include Date Time stamp in file name ⓘ

Schedule Details

Start

☐ Recurring ⓘ Run Every Until

Distribution Details

Send To

Subject

Message

Destination Farm

Add to Library List

☐ Send to Admins ⓘ ☐ Send to Site Collection Admins ☐ Create Reports by Selection Hierarchy ⓘ

Note that, for some ControlPoint operations that are likely to be scheduled for purposes of compliance with corporate or regulatory policy, this section is labeled **Enforce Policy**.

Delete User Permissions ⓘ

SELECTION

PARAMETERS

ENFORCE POLICY

RESULTS

General Job Information

Job Name ☒ Active

- 2 Enter a **Job Name** and **Description**.

TIP: Choose a brief but descriptive name that uniquely identifies the job. This will make it easier for you to identify it in the Schedule Monitor and Scheduled Jobs Report. If you choose to have the output posted to a SharePoint document library, the Job Name will also be used as the document Title.

- 3 If you want the job to be active, make sure the **Active** box is checked.


NOTE: Once a scheduled job has been added, it can be activated or deactivated as needed.

- 4 If you want to change the **Output File Name**, overwrite the default name.

CAUTION: The same *default* Output File Name is used for every action or analysis of a particular type. For example, whenever you schedule a Site Storage analysis, the default output file name is `xcrSiteStorageReport`, regardless of its scope, or who requested it. It is possible to have more than one job with the same output file name. Keep in mind, however, if more than one job with exactly the same output file name is posted to the same document library, an existing document will be overwritten with a more recent document with the same name.

- 5 For ControlPoint *analyses* only:

- a) If you want the date and time that the job is run to be appended to the file name, click the **Include Date Time stamp in the file name** box. (This will enable you to retain a historical record of analysis results that may be used as a record of compliance with policies or regulations.)
- b) If different than the default, select an **Output Type** from the drop-down.

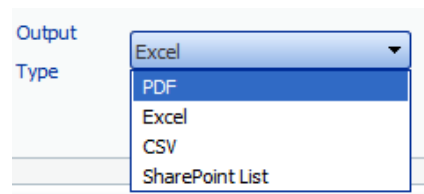

NOTES:


- If you choose **CSV**, output will be in the form of raw analysis data that can be imported into another program for further examination.
- If you choose **SharePoint List**, each individual data set within the analysis will be saved as a separate list. (The number of data sets depends on the complexity of the analysis.) You can also choose to **Keep Previous Version** as an alternative to Include Date Time stamp. If you check the **Keep Previous Version** box, ControlPoint will append a date and time stamp to all but the current version of the file name.

- 6 Complete the **Schedule Details** as follows:

If you want to ...	Then ...
run an operation one time only	Enter or select a Start date (📅) and time (🕒).
run an operation at regular intervals	<ol style="list-style-type: none"> a. For Start, enter the <i>first</i> date (📅) and time (🕒) that you want the job to run. b. Click the Recurring box. c. For Run every: <ul style="list-style-type: none"> • enter the interval (as a positive integer) at which you want the job to run • select an interval type (Hour, Day, or Month) d. For Until, enter or select the <i>last</i> date (📅) and time (🕒) that you want the job to run.

NOTE: Dates and times correspond to those of the server on which the ControlPoint scheduler is running.

7 Complete the **Distribution Details** as follows:

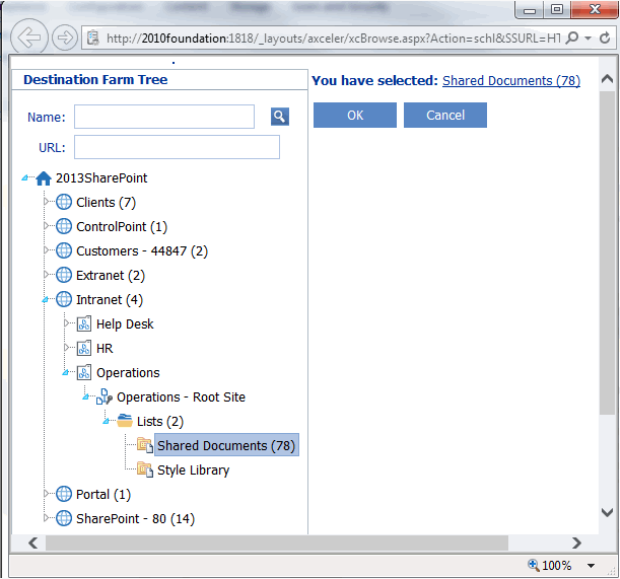If you want to ...	Then ...
<p>have a notification email sent to one or more recipients when the job completes* (and, in the case of an <i>analysis</i>, have output included in the email as an attachment)</p>	<p>complete the Send to:, Subject, and Message fields. (The From field will automatically be populated with the email address stored as that of the primary Site Collection Administrator for the ControlPoint Configuration site.)</p> <p>NOTE: You can either use the SharePoint People Picker as you would when selecting users on which to perform a ControlPoint action or analysis, or enter one or more email addresses (separated by semicolons), in the Send to field.</p>
<p>have analysis results posted to a SharePoint document library</p>	<p>Complete the Add to Library or List field as follows:</p> <ul style="list-style-type: none"> Click [Select] to display the Destination Selection Page pop-up dialog, and select a document library from the Destination Farm Tree. (Note that only lists and libraries within the current farm for which you have Full Control access display). Select a library from the tree (You can also enter a full or partial Name or URL to narrow your selection).  <ul style="list-style-type: none"> Click [OK] to dismiss the dialog and populate the field with the full url path to the selected library. <p>NOTE: When a document is placed into a SharePoint document library, the Output Filename becomes the document Name, and the Job Name becomes the document Title.</p>

If you want to ...	Then ...
have data sets within analysis results saved as SharePoint lists	<p>Complete the Distribution Site field as follows:</p> <ul style="list-style-type: none"> Click [Select] to display the Destination Selection Page pop-up dialog, and select a site from the Destination Farm Tree. (You can also enter a full or partial Name or URL to narrow your selection). Click [OK] to dismiss the dialog and populate the field with the full url path to the selected site. <p>CAUTION: If you are scheduling an analysis to run on a recurring basis and choose to save previous versions, be aware that a large number of lists may accumulate on the selected site (especially if analyses with multiple data sets are run frequently).</p>
have analysis results emailed to administrators responsible for sites within the selected scope	<p>check either or both of the following boxes:</p> <ul style="list-style-type: none"> Send to Admins - Results will be emailed to recipients who meet the criteria for admins that the ControlPoint Application Administrator has defined for the ControlPoint Configuration Setting SiteAdminCriteria Send to Site Collection Admins - Results will be emailed to members of the Site Collection Administrators group. <p>NOTE: Currently, ControlPoint does not evaluate membership in Active Directory groups. Therefore, emails will not be sent out to users whose permissions have been granted solely through membership in one or more Active Directory groups.</p>
have a separate result set generated at each level of the hierarchy and email only the relevant result set(s) to the responsible administrator	<ul style="list-style-type: none"> check the Create Reports by Selection Hierarchy box. <p>NOTES:</p> <ul style="list-style-type: none"> This option is available only if Send to Admins has been checked This option is not available for all analysis types. Result sets will be generated at the lowest level of the hierarchy at which the report can normally be run. When this option is checked and an analysis is scheduled to run on a recurring basis, ControlPoint will re-evaluate the list of recipients every time the job is run.

8 To save the job, click [**Schedule**].

Once a scheduled job has been created, it can be accessed via the [Schedule Monitor](#).

Generating a Scheduled Jobs Report

The Scheduled Jobs Report provides the same information as the [Schedule Monitor](#).

To generate a Scheduled Jobs Report:

- 1 From the Manage ControlPoint panel, choose **Schedule Management and Logging > Scheduled Jobs Report**.

Schedule Jobs > Select parameter(s) to act on ?

From "Next Run Date": 3/10/2013

To "Next Run Date": 3/15/2013

Show Jobs with Status: <ALL>
Pending
Running
Retired
Cancelling

Include Job Types: <ALL>
Actions
Alerts
Reports
Compliance

Job Name Includes:

☐ Exclude Child Jobs

If you want to change the default date range, enter or select a **From "Next Run Date"** and **To "Next Run Date"**

NOTE: **Next Run Date** identifies:



- the next date/time a Pending job is scheduled to run
 - the last date/time a Retired or Inactive job ran
 - the start date/time that an in-process job started running.
- 2 Select one or more **Status** values from the list box. Use the information in the table below for guidance.

NOTE: You can select multiple status values using the [CTRL] or [SHIFT] in the conventional manner. If you want to view all scheduled jobs for the specified date range, select **All**.

Status	Description
Pending	All jobs that are scheduled to run within the specified date range. Pending jobs include: <ul style="list-style-type: none">• one-time jobs that have not yet run AND <ul style="list-style-type: none">• recurring jobs that have not yet reached their End Date.
Running	All scheduled jobs that are currently running (as long as the specified date range includes the current date).

Status	Description
Cancelling	All running jobs for which the current instance is in the process of being cancelled.
Cancelled	All jobs for which the last running instance was cancelled.
Inactive	Jobs that are not currently active but were created or last ran during the specified date range.
Retired	Jobs that finished running within the specified date range. Retired jobs include: <ul style="list-style-type: none"> one-time jobs that have already run AND <ul style="list-style-type: none"> recurring jobs that have reached their End Date.

- 3 If you want to further filter your results, use the information in the table below for guidance.

If you want to ...	Then ...
<p>exclude site admin-specific "sub-jobs" that are created when a scheduled job is created with the Create Reports by Selection Hierarchy box checked</p> 	<p>check the Exclude Child Jobs box..</p>
<p>include only jobs of one or more specific types (Actions, Alerts, and/or Reports) (all job types are included by default)</p>	<p>highlight the job type(s) you want to include in the Include Job Type(s) list box.</p>
<p>display only jobs whose name includes a specified text string</p>	<p>complete the Job Name Includes: field with a full or partial job name.</p> 

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

From "Next Run Date": 10/12/2015

To "Next Run Date": 10/19/2015

Show Jobs with Status: <ALL>
Pending
Running
Retired
Cancelling

Include Job Types: <ALL>
Actions
Alerts
Reports
Compliance

Job Name Includes:

☐ Exclude Child Jobs

From Scheduled Jobs Report results you can [view a job's run history](#).

Monitoring Scheduled Jobs

The Schedule Monitor lets you view the status of scheduled jobs over a specified date range. From the Schedule Monitor you can link to pages that let you:

- view/edit the details of a scheduled job
- delete scheduled jobs
- link to detailed run history of a job

NOTE: If you are a Farm Administrator, you will be able to view all scheduled jobs; otherwise, you will only be able to view jobs that you submitted.

To access the Schedule Monitor:

- 1 From the Manage ControlPoint panel, choose **Scheduled Management and Logging > Schedule Monitor**.

By default, the Schedule Monitor grid displays jobs that are scheduled to run within the next seven days.

Schedule Monitor > Select parameter(s) to act on ?

Schedule Monitor Filter Settings

From 'Next Run Date': 3/10/2013 To 'Next Run Date': 3/17/2014 [Set range to show all dates](#)

Show Jobs with Status: **<ALL>**
Pending
Running
Cancelling
Cancelled
Retired

Include Job Types: **<ALL>**
Actions
Alerts
Reports
Compliance

Job Name Includes:
☐ Exclude Child Jobs

Auto Refresh Settings

☐ Auto Refresh Monitor

Refresh Rate: 60 Seconds

Auto refresh mode is off

[Refresh Display](#)

2 If you want to change the default date range, do one of the following:

- To include jobs within a specified date range:
 - a) Enter or select a From "Next Run Date" and To "Next Run Date"
 - b) Click **[Refresh Display]**.
- To include *all* jobs regardless of the run date, click **[Set range to show all dates]**.

NOTE: **Next Run Date** identifies:

- the *next* date/time a Pending job is scheduled to run
- the *last* date/time a Retired or Inactive job ran
- the *start* date/time that an in-process job started running.



3 Select one or more **Status** values from the list box. Use the information in the table below for guidance.

NOTE: You can select multiple status values using the **[CTRL]** or **[SHIFT]** in the conventional manner. If you want to view all scheduled jobs for the specified date range, select **All**.

Status	Description
Pending	All jobs that are scheduled to run within the specified date range. Pending jobs include: <ul style="list-style-type: none"> one-time jobs that have not yet run AND <ul style="list-style-type: none"> recurring jobs that have not yet reached their End Date.
Running	All scheduled jobs that are currently running (as long as the specified date range includes the current date).
Cancelling	All running jobs for which the current instance is in the process of being cancelled.

Status	Description
Cancelled	All jobs for which the last running instance was cancelled.
Inactive	Jobs that are not currently active but were created or last ran during the specified date range.
Retired	<p>Jobs that finished running within the specified date range. Retired jobs include:</p> <ul style="list-style-type: none"> • one-time jobs that have already run <p>AND</p> <ul style="list-style-type: none"> • recurring jobs that have reached their End Date. <p>IMPORTANT: Any Discovery job that was scheduled prior to version 8.7 will display in Retired status and can be deleted but not edited.</p>

- 4 If you want to further filter your results, use the information in the following below for guidance.

If you want to ...	Then ...
<p>exclude site admin-specific "sub-jobs" that are created when a scheduled job is created with the Create Reports by Selection Hierarchy box checked</p> 	<p>check the Exclude Child Jobs box.</p>
<p>include only jobs of one or more specific types (Actions, Alerts, and/or Reports) (all job types are included by default)</p>	<p>highlight the job type(s) you want to include in the list box.</p>
<p>display only jobs whose name includes a specified text string</p>	<p>complete the Job Name Includes: field with a full or partial job name.</p> 

Schedule Monitor Filter Settings

From 'Next Run Date':
11/9/2015

To 'Next Run Date':
11/16/2015

Set range to show all dates

Show Jobs with Status:

<ALL>

Pending

Running

Cancelling

Cancelled

Retired

Inactive

Include Job Types:

<ALL>

Actions

Alerts

Reports

Compliance

Job Name Includes:

☐ Exclude Child Jobs

Auto Refresh Settings

☐ Auto Refresh Monitor

Refresh Rate: 60
Seconds

Auto refresh mode is off

Refresh Display

Select All

Edit	Select	Job Name	Type	Action/Alert/Report	Active	Status	Schedule St	Schedule En	Recurring	Interval	Interval Type	Last Run Dat	Last Run S	Ne
	<input type="checkbox"/>	Weekly Audit Lo	Report	xcrAuditReport	<input checked="" type="checkbox"/>	Pending	10/12/2015	1/1/2016 12	<input checked="" type="checkbox"/>	1	WEEKLY	11/9/2015 1	Complete	11/

The Schedule Monitor displays the following information:

- **Job Name**
- **Job Type**
- an indication of whether the job is **Active** (checked) or inactive (unchecked)
- **Schedule Status** (Pending, Running, Retired, or Inactive)
- **Scheduled Start** date and time
- the **Schedule End** date and time which, for recurring jobs, displays the last date and time that the job is scheduled to run.

NOTE: For one-time jobs, the Schedule End date and time (which displays as an hour later than the Schedule Start) has no significance.
- a checkbox indicating whether the job is one-time (unchecked) or **Recurring** (checked)
- for recurring jobs, the **Interval** and **Interval Type** (Hour, Day, Week or Month)
- **Last Run Date** and time
- **Last Run Status** (Complete, Failed, Started, Cancelling, or Cancelled)
- **Next Run Date**, which identifies:
 - the *next* date/time a Pending job is scheduled to run
 - the *last* date/time a Retired or Inactive job ran
 - the *start* date/time that an in-process job started running.
- the **User** who scheduled the job.
- an indication of whether or not the scheduled job was created with the **Run by hierarchy** option
- if the job is an instance of a ControlPoint Governance Policy, the name of the Policy Instance.

You can:

- sort by clicking on a column header
- change the order of columns by dragging and dropping.

From the Schedule Monitor you can:

- set the Schedule Monitor grid to Auto Refresh

- [open a job for viewing/editing](#)
- [view a job's run history](#)
- [cancel or delete one or more jobs](#)

Viewing/Editing a Scheduled Job

From the Schedule Monitor, you can access a scheduled job whose details you want to view or edit.

To access a scheduled job's details:

From the Schedule Monitor, click the job's Edit link.

The job opens in a separate browser window.

To edit the job:

- 1 Modify the appropriate fields within the Schedule or Enforce Policy section.
- 2 To save changes, click [**Update**].

Viewing a Scheduled Job's History

From the Schedule Monitor, you can view the run history of a scheduled job. In the case of scheduled actions (including alerts), you can generate a ControlPoint Task Audit to view more detail about the job.

To view the history of a scheduled job:

- From the Schedule Monitor or Scheduled Jobs Report, click the job's **Last Run** link.

Recurring	Interval	Interval Type	Last Run	Last Run Status	Ne
	0	HOURLY	3/10/2014 12:40:42 PM	Complete	3/10 PM

History:

- From a scheduled job's detail page, click the [**View History**] button.

The Schedule History includes the following information:

- **Run Start** date and time
- **Run End** date and time
- process **Status** (Started, Completed, or Failed)

To stop a running instance of a scheduled job:

NOTE: You can only stop instances of jobs that are currently running, and this action does not delete either the job itself or any future instances of a recurring job.

- 1 In the **Select** column, check the box beside each running job instance you want to stop.*
- 2 Click **[Stop Selected]**.

To delete one or more scheduled jobs:

- 1 In the **Select** column, check the box beside each job you want to delete.*
- 2 Click **[Delete Selected]**.

You will be prompted to confirm the deletion before the operation is carried out.

To delete all scheduled jobs:

- 1 Click **[Select All]**.
- 2 Click **[Delete Selected]**.

You will be prompted to confirm the deletion before the operation is carried out.

NOTE: If you want to de-select currently selected jobs, click **[Reset]**.

Saving, Modifying and Running Instructions for a ControlPoint Operation


All schedulable ControlPoint operations can be saved in an XML file as "instructions" and run at a later time. If an operation has parameters that are modifiable, you can modify them in the XML file before running the job.

NOTE: Currently you cannot run instructions for multi-farm operations.

Saving Instructions

To save Instructions for a ControlPoint operation:

- 1 After specifying the parameters for the operation, click [**Save As**].

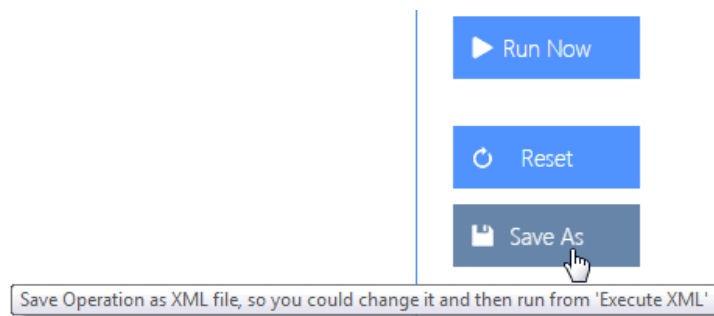

- 2 Click [**Download**] to display the File Download dialog.
- 3 Click [**Save**] then save the file to the local machine— that is, the machine where the browser is running—or network location of your choice.

TIP: You may want to change the default file name to one that is more unique and descriptive.


- 4 When the file has finished saving, click [**Close**] to dismiss the open dialogs.

Modifying Instructions

Depending on the operation, you may be able to modify some or all of the parameters of XML Instructions with valid values. For example, while the Migrate User action only permits one user to be migrated via the ControlPoint application interface, you can run the operation on multiple users by adding them to the XML instructions.

You should not attempt to change any part of the instructions apart from modifiable parameters. It is strongly recommended that you make a copy of the XML file before editing it, as it is possible that unintended changes can be made to tags or unmodifiable portions of the file.


```
- <Operation Type="Action" Code="MigrateUser">
- <selection>
  <Item name="2007SHAREPOINT (Home Farm)" type="FARM" guid="efcecf6-42d7-4f44-b503-7e83ff6b9b29" id="0" parentid="-1" AllChildren="True"
    action="nonsense" URL="http://2008sharepoint:1919/" image="images/Farm.gif" aux="FARMGUID@efcecf6-42d7-4f44-b503-
    7e83ff6b9b29,FARMNAME@SharePoint_Config,FARMTOOLTIP@" />
- </selection>
- <xcmigrateUserData xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <Warnings />
  <blnPropagate2Lists>false</blnPropagate2Lists>
  <blnPropagate2Items>false</blnPropagate2Items>
  <ScheduledCurrentUser />
- <migrateUsers>
  - <item>
    - <key>
      <string>AXCELERTEST\sammuelclemens</string>
    </key>
    - <value>
      <string>AXCELERTEST\marktwain</string>
    </value>
  </item>
  - <item>
    - <key>
      <string>AXCELERTEST\stephendedalus</string>
    </key>
    - <value>
      <string>AXCELERTEST\jamesjoyce</string>
    </value>
  </item>
  - <item>
    - <key>
      <string>AXCELERTEST\marysmith</string>
    </key>
    - <value>
      <string>AXCELERTEST\maryjones</string>
    </value>
  </item>
</migrateUsers>
<blnVerifySid>false</blnVerifySid>
<blnProcessADGrps>false</blnProcessADGrps>
</xcmigrateUserData>
```

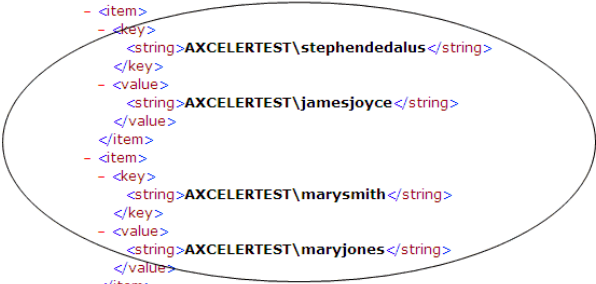


Running Instructions

To run instructions for a ControlPoint operation:

- 1 Use one of the following options:
 - From the SharePoint Hierarchy select the farm node, then choose **Run Saved Instructions**.

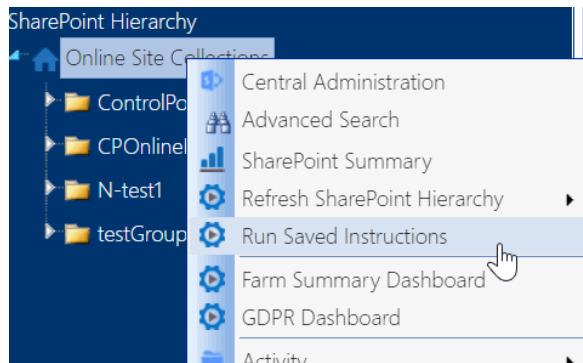

- From the Manage ControlPoint panel, choose **Run Saved ControlPoint Instructions**.

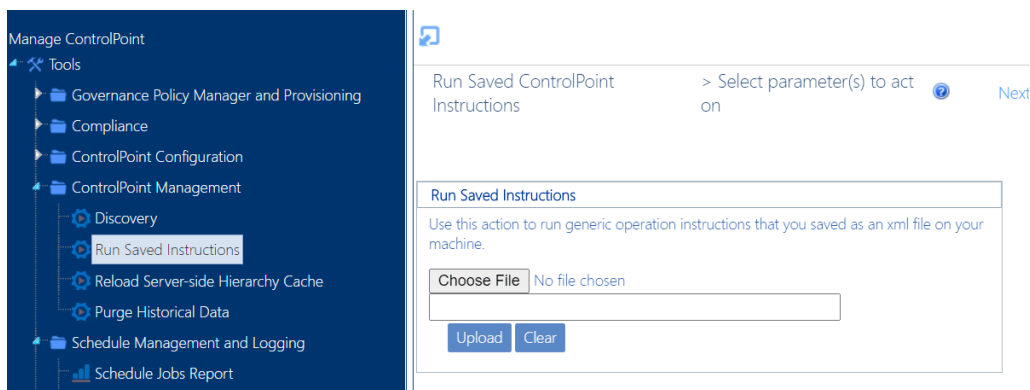

- 2 Click [**Browse...**] and locate the **XML File** with the instructions you want to run.
- 3 Click [**Upload**].

Now you can either:

- run the operation immediately (by clicking the [**Run Now**] button)

OR

- [schedule the operation to run at a later time.](#)

Configuring a URL for Running Saved Instructions from Outside ControlPoint

You can create a url from which you can invoke the running of saved ControlPoint instructions from outside the ControlPoint application. This technique makes it possible for ControlPoint users to run a ControlPoint operation from anywhere a URL can be placed, including:

- an electronic document
- a Links Web Part on a SharePoint site
- within an email to another ControlPoint user.

The instructions can be saved to a file share or posted to a document library that has been created within the ControlPoint Configuration site.

When the URL is launched, the Run Saved ControlPoint Instructions page opens in a standalone window and the instructions begin running automatically.

User Account Requirements

In order to run saved instructions from a URL:

- the ControlPoint user must [have permissions to perform a ControlPoint operation on the SharePoint object\(s\) within the scope of the saved instructions](#), and
- the ControlPoint Service Account must have access to the file share or document library to which the instructions have been saved.

NOTE: One of the advantages of posting to the ControlPoint Configuration site is that the appropriate permissions to the document library are automatically granted (through inheritance from the parent site) by default.

Parts of the URL

- `http://<server_name>:<port_number>/_layouts/axceler/xcc executexml.aspx`
The path to the ControlPoint application Run Saved ControlPoint Instructions page


- Either
 - `XMLFILEURL=[directory]\[file_name.xml]`
The path to the saved instructions on the file share.

NOTE: If you specify a local drive (for example, C:\), ControlPoint assumes that the drive is *local to the server on which ControlPoint is installed (not the current user's machine)*.

OR

- `XMLLISTNAME=[library_name]&XMLFILENAME=[file_name]`
The path to the saved instructions in the document library on the ControlPoint Configuration site.


Example: Instructions saved to a file share

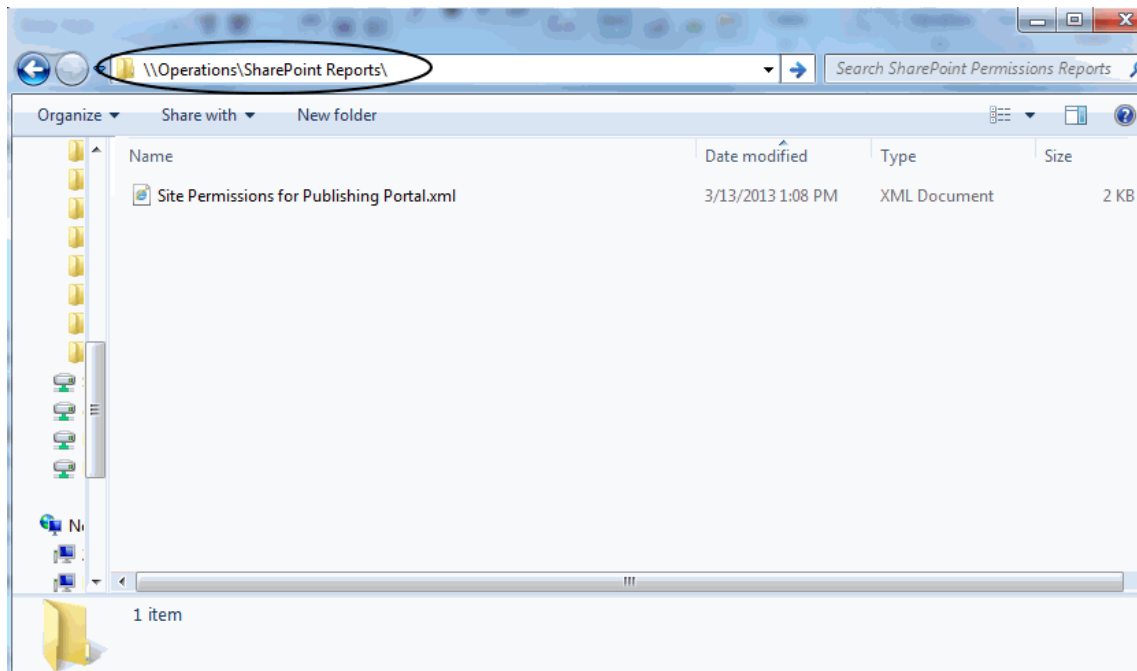

URL = `http://qa2016farmvm1:1818/_layouts/axceler/xcc executexml.aspx?`
XMLFILEURL=\\Operations\SharePoint Reports\Site Permissions for Publishing Portal.xml

Example: Instructions Saved to a ControlPoint Configuration Site Document Library

Note that the document library to which you post the saved instructions must have been created within the ControlPoint Configuration site.

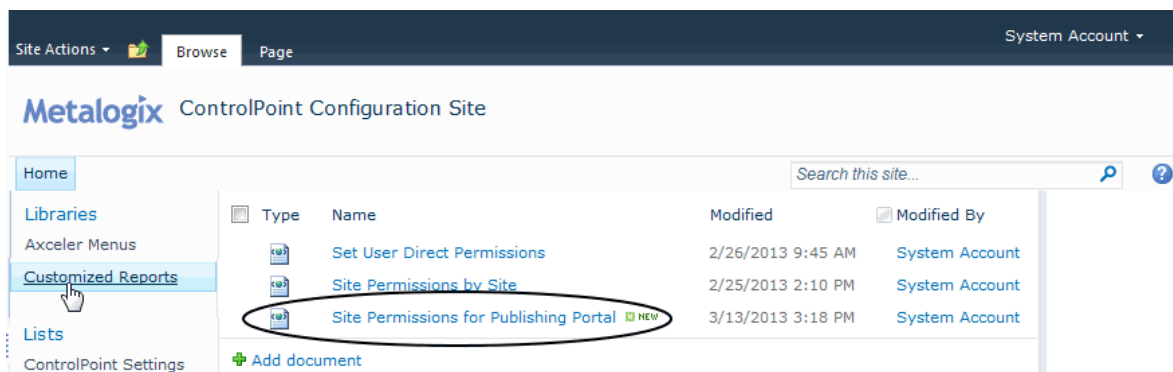

URL=`http://qa1016farmvm1:1818/_layouts/axceler/xcc executexml.aspx?`
XMLLISTNAME=CustomizedReports&MLFILENAME=Site Permissions for Publishing Portal.xml

Using the ControlPoint Governance Policy Manager

The ControlPoint Governance Policy Manager allows you to define standard governance policies or best practices consisting of one or more ControlPoint operations, each scheduled to run at a specified time or interval, and applied to a selected scope.

NOTE: Governance Policies cannot be applied to the scope of an entire farm.

For example, you may want to both **monitor and enforce security** for some of your most mission-critical SharePoint sites. You could create a Governance Policy that will enable you to:

- generate a weekly Site Permissions report and have it sent to each of the site owners.
- back up site permissions on a regular basis
- create ControlPoint Policies to control the types of permissions changes that can be made to sites within the selected scope

To **manage the size of site collections** within your environment, you could create a Governance Policy that will enable you to:

- create ControlPoint Policies to control:
 - the size of files uploaded to lists and libraries within the selected scope
 - the creation of subsites at a specified depth
- use the Set Site Collection Properties action to set and enforce the same quota across all site collections within the scope
- run a weekly Most/Least Storage analysis to identify and monitor the site collections and sites within the scope using the most storage

You can also apply Governance Policies to [Site Provisioning templates](#).


Launching the ControlPoint Governance Policy Manager

To launch the ControlPoint Governance Policy Manager:

- From the SharePoint Hierarchy Farm node, choose **Automation > Governance Policy Manager**.

OR

- From the Manage ControlPoint panel choose **Governance Policy Manager and Provisioning > Governance Policy Manager**.

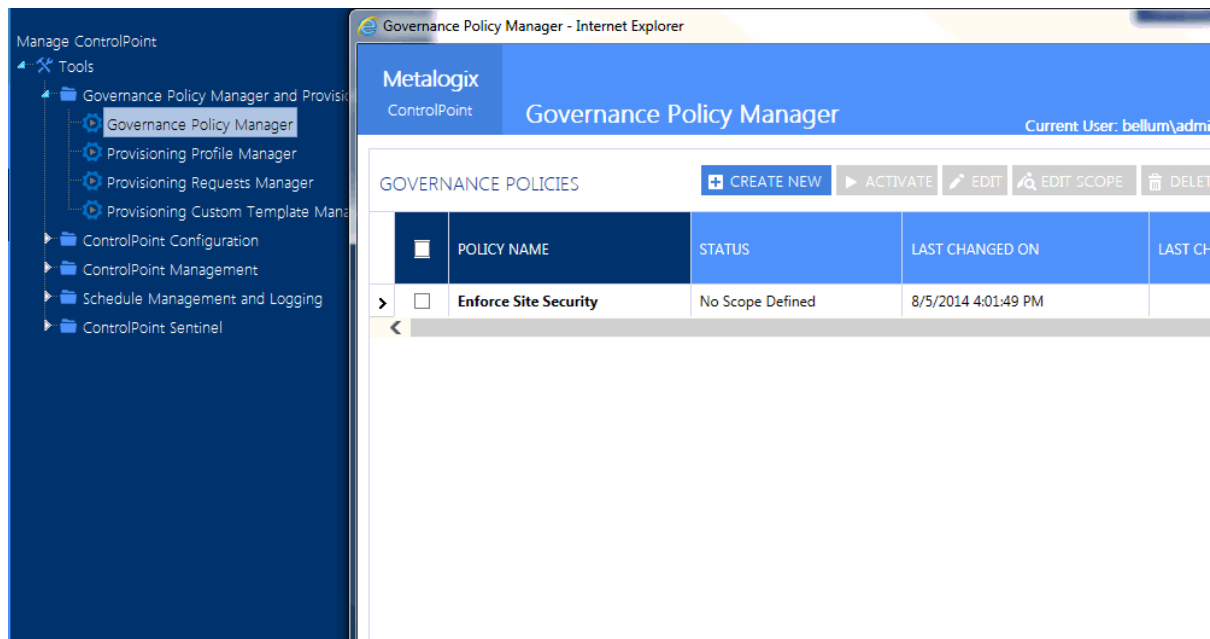

NOTE: All Governance Policies can be viewed/edited by all ControlPoint users (for example, other ControlPoint users can add sites that they manage to the scope of an existing policy).

Creating a Governance Policy

To create a governance policy:

From the Governance Policy Manager main page, click **[Create New]**.

- 1 Enter a **Governance Policy Name**.

- 2 **Select the Policy Rule Type (Actions, Reports, or ControlPoint Policies and Alerts).**

Build Governance Policy

POLICY NAME

Enforce Site Security

SELECT POLICY RULE TYPE

Actions

Reports

ControlPoint Policies and Alerts

- 3 **Select a Governance Policy Category.**

Build Governance Policy

Policy Name:

Enforce Site Security

Rule Type: Reports

Select Category:

Activity

Audit and Alerts

Automation

Change Management


Configuration

Content


Storage

Users and Security

Note that the categories correspond to the folders in the SharePoint Hierarchy right click menus.

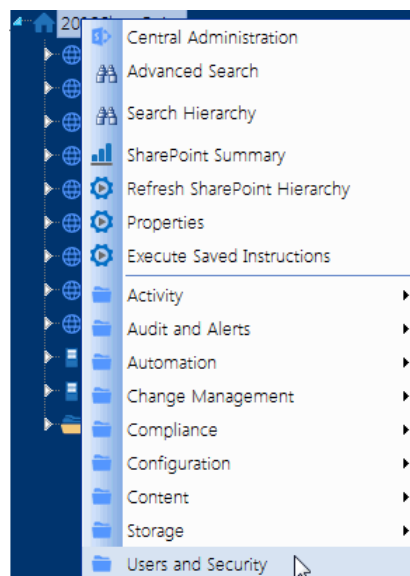

- 4 Select the operation that you want to add to your Governance Policy.

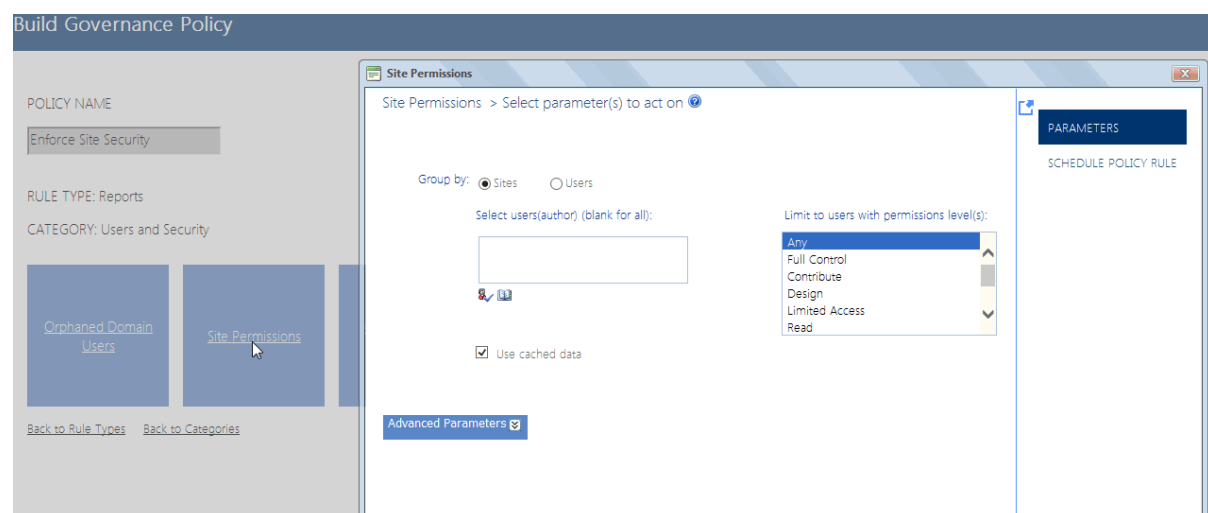


- 5 Specify the **Parameters** for the rule.

NOTE: To access instructions for completing the applicable ControlPoint operation, click the Help icon (?) at the top right corner of the window or refer to the relevant section of the ControlPoint User Guide.

- 6 Click the **Schedule Policy Rule** tab, and follow the instructions for [Scheduling a ControlPoint Operation](#).
- 7 To return to the Build Governance Policy window, click **[Save and Close]**.

Note that the name of the rule (which is the Schedule Job Name) displays under **Configured Rules**.

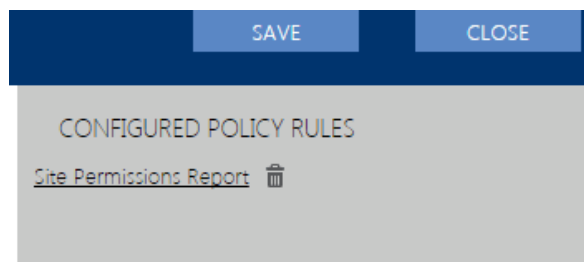

- 8 If you want to define another rule for the Governance Policy, use the information in the following table to determine the appropriate action to take.

If you want to configure a rule ..	Then ...
in the same category	select the next operation for which you want to create a rule, then repeat Steps 6-8.
of the same type in a different category	click the Back to Categories link, then repeat Steps 4-8.
of a different type	click the <i>Back to Rule Types</i> link, then repeat Steps 3-8.

- 9 When you are finished configuring rules, click **[Save]**.

- 10 Click **[Close]** to return to the Governance Policy Manager main page.

Note that, if you chose to save the policy before it was completed or have not yet created a scope, it will display in the grid on the Governance Policy Manager main page with the applicable status.

GOVERNANCE POLICIES

<input type="checkbox"/>	POLICY NAME	STATUS	LAST CHANGED ON
▼ <input type="checkbox"/>	Change Management	No Scope Defined	10/12/2015 2:40:13 PM
	SELECTED SCOPE		
	There is no Scope for this Policy as of yet.		
▼ <input checked="" type="checkbox"/>	Enforce Site Security	Incomplete	10/12/2015 2:41:18 PM
	SELECTED SCOPE		
	http://2010foundation/ (SharePoint - 80 (16))		

A policy scope can be *created* for incomplete policies, but they cannot be *activated* until the policy has been completed.

GOVERNANCE POLICIES

+ CREATE NEW ▶ ACTIVATE ✎

<input type="checkbox"/>	POLICY NAME	STATUS	LAST CHANGED ON
> <input type="checkbox"/>	Change Management	No Scope Defined	10/12/2015 2:40:13 PM
▼ <input checked="" type="checkbox"/>	Enforce Site Security	Inactive	10/12/2015 2:59:56 PM
	SELECTED SCOPE		
	http://2010foundation/ (SharePoint - 80 (16))		

Creating a Governance Policy Scope and Activating the Governance Policy

Once a Governance Policy has been created, it must be applied to a specific scope (that is, one or more selected site collections or sites).

NOTE: If a Governance Policy is applied to a Site Provisioning Template, the scope will automatically be updated to include any newly created sites based on that template.

To create a Governance Policy Scope:

- 1 From the Governance Policy Manager main page, click the **Create Scope** icon for the applicable policy.

GOVERNANCE POLICIES					CREATE NEW	ACTIVATE	EDIT	EDIT SCOPE	DELETE
	POLICY NAME	STATUS	LAST CHANGED ON	LAST CHANGED BY					
>	<input checked="" type="checkbox"/> Change Management	No Scope Defined	10/12/2015 2:40:13 PM						

- 2 From the **Create scope for [Governance_Policy_Name]** dialog

- a) Select the objects that you want to include in the scope.

Manage scope for Change Management

Control-click to select multiple items from the left side. Right-click for additional options.

Check check-boxes to include all children of the item.


The diagram illustrates the 'Available Items' and 'Selected Items' panels. The 'Available Items' panel on the left has an 'Expand Scope' checkbox and search fields for 'Name' and 'URL'. It lists items under a '2013SharePoint' root, including 'Clients (7)', 'ControlPoint (1)', 'Customers - 44847 (2)', 'Extranet (2)', 'Intranet (4)', 'Help Desk', 'HR', 'Operations', 'New Content DB', 'Portal (1)', and 'SharePoint - 80 (16)'. The 'Intranet (4)' item is highlighted. The 'Selected Items' panel on the right shows the '2013SharePoint' root with the 'Intranet (4)' item selected, indicated by a checkmark. Arrows and buttons between the panels show the workflow: 'Select & Drag' from available to selected, an 'Add >' button, '< Remove' button, and 'Select & Drag' from selected back to available.

- b) Click **[Add Scope]**.

To activate a Governance Policy:

- 1 Click the arrow in the left-most column to expand the policy and display the scope.

- 2 Click **[Activate]**.

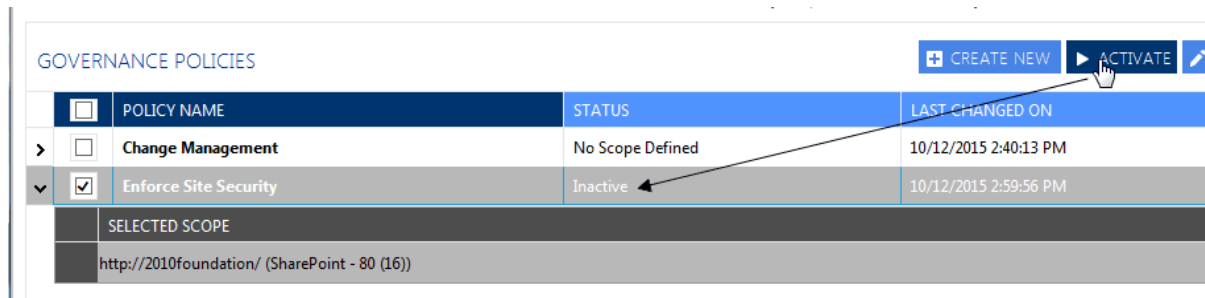

Once a Governance Policy has been activated, you can view its status via the [ControlPoint Schedule Monitor](#). Once a policy rule that performs an action has run, you can view a ControlPoint Task Audit for the action.

IMPORTANT: If you add a subsite or list to an existing scope, the policy must be activated again in order for the object to be included in the scope.

Editing and Deleting Governance Policies and Policy Scopes

To edit a Governance Policy:

- 1 From the Governance Policy Manager main page, check the box to the left of the Governance Policy you want to edit.
- 2 Click **[Edit]**.
- 3 Follow the instructions for [Creating a Governance Policy](#).

To edit a Governance Policy Scope:

- 1 From the Governance Policy Manager main page, check the box to the left of the Governance Policy whose Scope you want to edit
- 2 Click **[Edit Scope]**.
- 3 [Select the new scope](#) and activate.

To delete a Governance Policy:


- 1 From the Governance Policy Manager main page, check the box to the left of the Governance Policy(ies) you want to delete.
- 2 Click **[Delete]**.

To delete a Governance Policy Scope:

- 1 From the Governance Policy Manager main page, check the box to the left of the Governance Policy(ies) whose scope you want to delete.
- 2 Click **[Delete Scope]**.

Using Sensitive Content Manager to Analyze SharePoint Content for Compliance

If you have Metalogix Sensitive Content Manager (SCM) installed, you can scan content for sensitive content, then specify an action to take based on the type/severity of the information found.

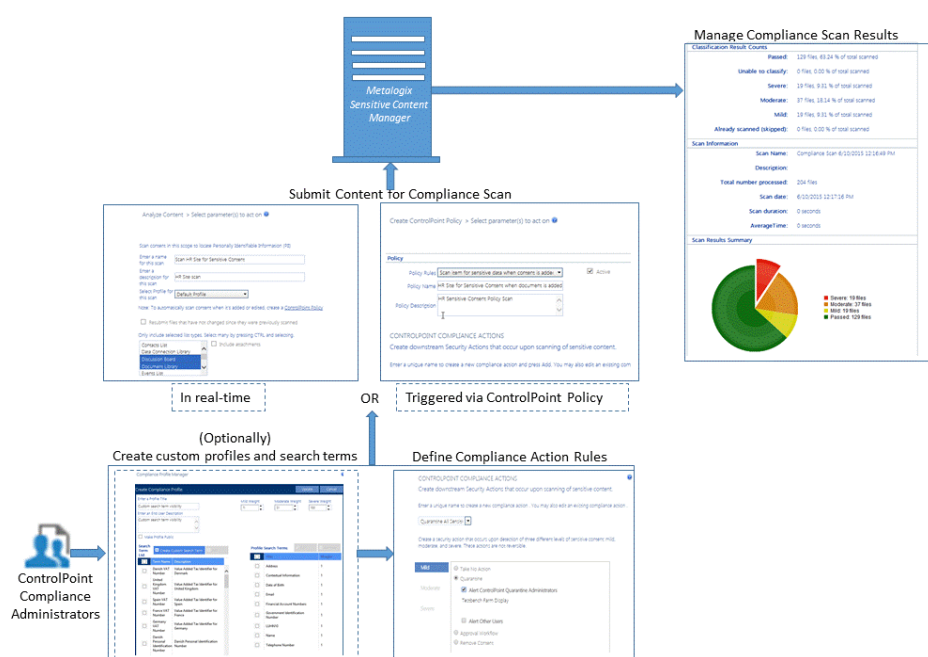

Compliance Functionality Process Overview

The process for using Metalogix Sensitive Content Manager to implement ControlPoint Compliance functionality is described below.

- ControlPoint Compliance Administrators [define Compliance Action Rules](#).
- ControlPoint Compliance Administrators [submit content to Metalogix Sensitive Content Manager for analysis](#).
- ControlPoint Compliance Administrators [manage Compliance Actions](#).

IMPORTANT: Before Using ControlPoint with Sensitive Content Manager

Before you can use ControlPoint to analyze content for compliance:

- Metalogix Sensitive Content Manager version 2.0 or later must be installed on a server in your environment. Refer to the *Metalogix Sensitive Content Manager Server Installation Guide*, which is available on the [Quest Support Technical Documentation](#) page.
- The latest version of ControlPoint Sensitive Content Manager Service must be installed. (As of version 8.4, the Sensitive Content Manager Schedule Job option is no longer available as an alternative.)

IMPORTANT: If you have upgraded from an earlier version of Metalogix Sensitive Content Manager, Any Custom Profiles, pending [content submissions](#) and/or [ControlPoint Policies](#) that use older Profiles may need to be re-created. Contact [Quest Support](#) for assistance.

Details can be found in the *Metalogix ControlPoint Administration Guide*.

Compliance Administrators Group

Only individuals who have been added to the ControlPoint Compliance Administrators group in the ControlPoint Configuration Site will be permitted to perform Compliance actions.

Sensitive Content Manager functionality is not available to users who are also members of the Business Administrators group.

Creating and Managing Sensitive Content Manager Profiles

A Sensitive Content Manager Profile is a named collection of content search and analysis guidelines. SCM includes a number of Standard (BuiltIn) Profiles for detecting Sensitive Content, which include:

- Personally Identifiable Information (PII)
- Protected Health Information (PHI)
- Payment Card Information (PCI)
- General Data Protection Regulation (GDPR) compliance.

NOTE: Quest continually adds new Standard (BuiltIn) Profiles, which cannot be modified or deleted.

Members of the ControlPoint Compliance Administrators group can also create and manage custom Profiles by defining content search and analysis guidelines to use, as an organization's file analysis criteria may differ from those used in BuiltIn Profiles. For example, you may want to create a custom Profile to group and weight a different subset of the predefined Search Terms, add custom Search Terms for sensitive data types, or analyze data that falls outside BuiltIn Profile definitions.

IMPORTANT: If you have upgraded from Sensitive Content Manager 1.9, you may have to re-create (or try to restore) any existing custom Profiles, as the range of possible severity levels. Contact [Quest Support](#) for assistance.

Sensitive Content Manager Profile Components

Sensitive Content Manager Profiles consist of the components described in the following table.

Profile Component	Description
Search Term	<p>A word or any simple or complex alphanumeric pattern that represents sensitive information in a document.</p> <p>For example, in the PII Profile, these Search Terms are the personal identifiable information like a person's name, date of birth, financial account numbers, address, email address, etc.</p> <p>Each content search uses a set of Search Terms in a Profile.</p>
Regular Expression (Regex)	<p>The search syntax for a Search Term.</p> <p>The analysis engine matches the file contents with a Search Term based on the regex syntax specified in the Profile. You can define new Profiles that use the Standard Search Terms, or create Search Terms based on custom expressions.</p> <p>NOTE: Regular expressions for the predefined search terms are internally defined in the Search Term, and cannot be modified because they are not standalone regular expressions.</p>
Weight	<p>The degree of severity of a possible content match for a specific Profile.</p>
File Score	<p>That weight factor combined with the number of content matches encountered during an analysis job.</p> <p>File scores are calculated during a file analysis to determine the overall severity level of a document</p>

Creating, Editing, and Deleting Sensitive Content Manager Profiles

IMPORTANT: As of Metalogix Sensitive Content Manager version 2.0:

- The concept of Public vs. Private Profiles has been eliminated. All Profiles can be viewed by all members of the Compliance Administrators group.

- The range of possible Severity Thresholds has been reduced to between 1 and 10. If you have upgraded from an earlier version, Standard (BuiltIn) Profiles will reflect this change. Any Custom Profiles, as well as pending [content submissions](#) and/or [ControlPoint Policies](#) that use older Profiles, may need to be re-created.

To create a Sensitive Content Manager Custom Profile:

1. From the Manage panel, choose **Compliance > Profile Maintenance**.

Compliance Profile Manager

	Profile Name	Profile Description	Profile Visibility	Mild Threshold	Moderate Threshold	Severe Threshold
<input type="checkbox"/>	PII	Default PII	BuiltIn	1	4	9
<input type="checkbox"/>	Payment Card Information	Payment Card Information	BuiltIn	1	4	9
<input type="checkbox"/>	Protected Health Information	Protected Health Information	BuiltIn	1	4	9
<input type="checkbox"/>	GDPR	General Data Protection Regulation	BuiltIn	1	4	9

2. Click **[Create]**.
3. Enter a unique title for the Profile, as well as a description that will be visible to end users.

Enter a Profile Title

Sensitive IT Information

Enter an End User Description

Sensitive information for use by IT only

4. If different than the defaults, using a range from 1-10, adjust the relative weights (that is, the degree of severity of a possible content match) for each threat level (Mild, Moderate, and Severe).

Mild Weight: 1 Moderate Weight: 3 Severe Weight: 8

5. From the **Search Term List**, select the Search Term(s) that you want to add to the Profile, then click **[Add]** to move the term(s) to the **Profile Search Terms** list.

Search Term List

	Term Name	Description
<input type="checkbox"/>	Arrest Record	Arrest Record
<input type="checkbox"/>	Australian Medicare ID	Checksum for Australian Medicare ID
<input type="checkbox"/>	Australian Tax ID	Checksum for Australian Tax ID
<input checked="" type="checkbox"/>	Contextual Information	Any other information (IP Address, Employer and Job Title, etc.) that would allow a reasonable individual without access to additional information to identify a specific individual
<input type="checkbox"/>	Czech Birth Number	Czech Birth Number

Profile Search Terms

	Title	Weight
<input type="checkbox"/>	IP Address	1

NOTE: If you want to include a Search Term that does not display in the list, you can create a [custom Search Term](#).

- 6 Click **[Create]**.

To edit a Custom Profile:

- 1 In the Compliance Search Terms Manager page, select the Custom Profile you want to edit, then click **[Edit]**.
- 2 Update fields as needed, then click **[Update]**.

Note that BuiltIn Profiles are provided by Quest and cannot be edited or deleted.

Deleting a Custom Profile

You can delete a Custom Profile only if:

- a content analysis job that uses the profile has not yet been run

AND/OR

- it is not being used by any [ControlPoint Policies](#).

Managing Compliance Search Terms

Sensitive Content Manager includes a number of out-of-the-box BuiltIn Search Terms for use in creating Profiles. These include terms related to:

- Personal Identification Information (PII)
- Payment Card Information (PCI)
- Protected Health Information (PHI)
- General Data Protection Regulation (GDPR) compliance.

NOTE: Note that Quest continually adds Standard (BuiltIn) Search Terms, which cannot be edited or deleted.

Members of the Compliance Administrators can also create and maintain custom Search Terms to meet the organization's unique compliance needs.

To launch the Compliance Search Terms Manager page:

From the Manage panel, choose **Compliance > Search Terms Maintenance**.

NOTE: You can also access this page from the Compliance Profile Manager page by clicking **[Create Custom Search Term]**.

				Create	Edit	Delete
	Term Name	Description	Visibility			
<input type="checkbox"/>	Name	The first name (or initial) and last name of an individual	Standard			
<input type="checkbox"/>	Address	A geographical address of an individual's residence rather than place of work	Standard			
<input type="checkbox"/>	Email	An email address which is primarily used for personal, rather than business purposes	Standard			
<input type="checkbox"/>	Telephone Number	A phone number intended to contact an individual at their residence or on a mobile phone	Public			
<input type="checkbox"/>	Government Identification Number	A Social Security Number, Passport Number, Drivers License Number, or other number connected with a government issued identification system	Standard			
<input type="checkbox"/>	Financial Account Numbers	A Credit Card, Bank Account, or other account number with a financial institution	Standard			
<input type="checkbox"/>	Date of Birth	The date of birth for an individual if enough information is present in context so as to make clear whose date of birth is represented	Standard			

To create custom Search Terms:

- 1 Click **[Create]**.
- 2 Enter a **Search Term Title** and **Search Term Description**.

Create Search Term

Enter a Search Term Title:

Enter Search Term Description:

4. Enter a valid regex expression.

NOTE: Do not enter any leading or ending slashes (/)

Enter Expression:

5. To test the validity of the expression:


- a) enter representative text in the **Sample Text Goes Here:** field.

Sample Text Goes Here:

- b) Click the **[Test Expression]** at the bottom of the dialog.


A pop-up will display informing you that either:

- a match can be found for the text using the given regex

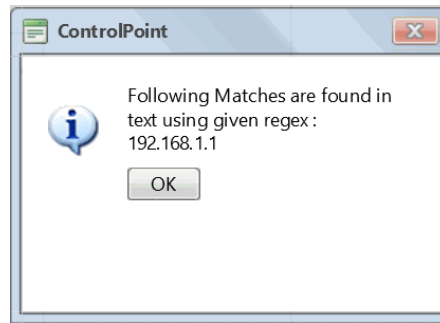

OR

- a match cannot be found for the text using the given regex.

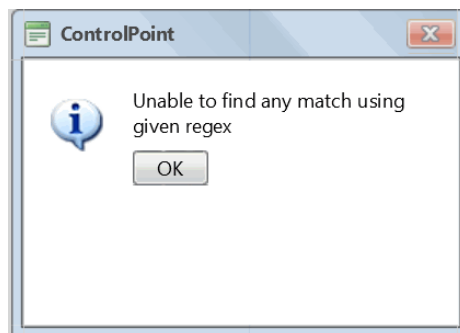

To edit a custom Search Term:

- 1 In the Compliance Search Terms Manager page, select the term that you want to edit, then click **[Edit]**.

Term Name		Description
<input type="checkbox"/>	Government Identification Number	A Social Security Number, Passport Number, Drivers License Number, or other number connected with a government issued identification system
<input type="checkbox"/>	International Bank Account Number	Checksum for International Bank Account Number
<input checked="" type="checkbox"/>	IP Address	Identify IP Addresses

- 2 Update fields as needed, then click **[Update]**.

NOTE: Any Search Term for which the regex is not visible is a BuiltIn Term provided by Quest that cannot be edited.

Defining Compliance Action Rules

[Members of the ControlPoint Compliance Administrators group](#) can define Compliance Action rules to determine how non-compliant content should be handled, based on the severity level detected. You can also specify that one or more users be alerted via email when a Compliance Action is taken.

REMINDER: Metalogix Sensitive Content Manager version 2.0 or later must be installed in your environment and you must be a member of the ControlPoint Compliance Administrators group to use this functionality.

To access the Compliance Actions page:

Use the information in the following table to determine the appropriate action to take.

If you are creating ...	Then ...
a global set of rules independent of a particular scan job	from the Manage panel, choose Compliance > ControlPoint Compliance Actions .
a set of rules for a specific scan job that has been returned from Metalogix Sensitive Content Manager	<ul style="list-style-type: none"> From the Compliance Summary page, select the scan job to which you want to apply the rule. Click [Apply Compliance Actions].
a ControlPoint Policy to scan for sensitive content	from the Create ControlPoint Policy page , select one of the policies to scan for sensitive content: <ul style="list-style-type: none"> Scan items for sensitive data when content is updated OR <ul style="list-style-type: none"> Scan items for sensitive data when content is updated or saved.

To define Compliance Action rules:

- 1 Enter a unique name to create a new Compliance Action, or choose an existing action from the drop-down.

CONTROLPOINT COMPLIANCE ACTIONS

Create downstream Security Actions that occur upon scanning of sensitive content.

Enter a unique name to create a new compliance action . You may also edit an existing compliance action .

Employee Records ▼

WARNING: If you choose to **Update Existing Compliance Actions**, the changes will be applied to all scan jobs that use it going forward. This is especially noteworthy in the case of ControlPoint policies, because once the policy is created the most current definition of the Compliance Actions is applied automatically based on scan results.

- 2 For each of the Severity levels (**Mild**, **Moderate**, and **Severe**), specify the action that should be applied when a threat is detected. You can choose to have ControlPoint:

- **Take No Action** on non-compliant content
- **Quarantine** non-compliant content
- **Use an Approval Workflow** to address non-compliant content
- **Remove** non-compliant content

Note that an action must be defined for all three severity levels. You can navigate from one rule to the next via the **Select actions for threat level:** button.

Select actions for threat level : Moderate >>

- 3 If you want ControlPoint to send an email alert when a specified action is taken:

- a) Check the **Alert Users** box.
- b) Click **[Create New User]**.
- c) Complete the **Select Users** for the user to which you want to send the alert.

NOTE: Currently, you can only select one user at a time. Repeat substeps b) and c) for each user you want to alert.

If you have chosen to have ControlPoint Quarantine an item with non-compliant content, you can also choose to have an alert sent to all members of the ControlPoint Compliance Administrators group.

- ☒ Quarantine
- ☒ Alert ControlPoint Quarantine Administrators


If you have chosen to use an Approval Workflow, follow the instructions for "Using an Approval Workflow," following.

- 4 When you have finished defining Compliance Rules for each Severity Level, click **[Save]**.

Using An Approval Workflow

If you have chosen to use an **Approval Workflow** to address non-compliant content, after clicking the **[Create New User]** button:

- 1 First, select the user who will be notified by ControlPoint to start the workflow when non-compliant content is found
- 2 Select additional users who will be designated as approvers.

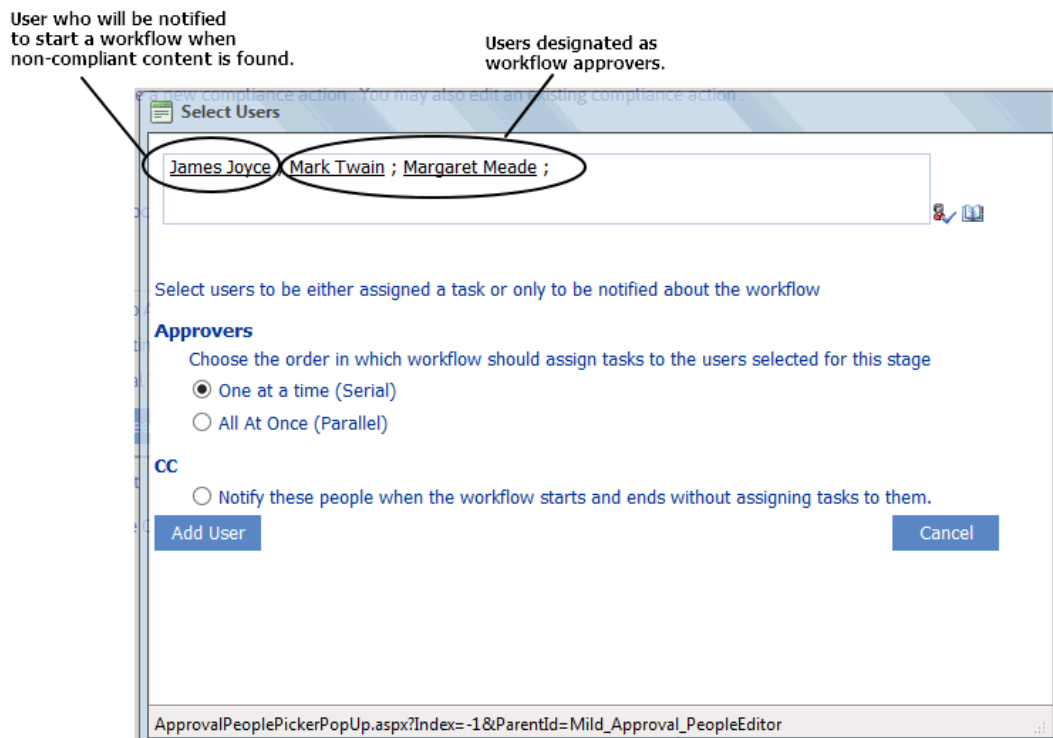

NOTE: The user you select to start the workflow must have permissions to Edit Items and approvers must have permissions to Approve Items for lists within the scope of the Compliance Action.

You can also choose to have SharePoint notify approvers

- **One at a Time (Serial)**

OR

- **All At Once (Parallel)**

- 3 Click **[Add User]**.

- 4 If you want SharePoint to notify additional users when an approval workflow starts and ends:
 - a) Click **[Create New User]**.
 - b) Select the users you want to notify.
 - c) Choose **Notify these people when the workflow starts and ends without assigning tasks to them.**
 - d) Click **[Add User]**.
- 5 For **Request**, enter the message that you want to be sent to users with assigned tasks.

☐ Take No Action
☐ Quarantine
☒ Approval Workflow

[+ Create New User](#)
[Edit Selected](#)
[Delete](#)

James Joyce will be notified to start the workflow.

	User Names	Association Type
<input type="checkbox"/>	James Joyce, Mark Twain, Margaret Meade	Serial
<input type="checkbox"/>	Washington Irving	CC

Request

☐ Remove Content

Select actions for threat level: [Moderate >>](#)

Compliance Action Alert Email

When a Compliance Action rule includes an alert, an email, which identifies the Severity Level and action taken, is automatically sent to selected recipients.

ControlPoint Application Administrators can change the default text for the email by updating the applicable ControlPoint Configuration Setting:

- **ComplianceMildLevelThreatsEmailBody**
- **ComplianceModerateLevelThreatsEmailBody**
- **ComplianceSeverLevelThreatsEmailBody**

Refer to the *ControlPoint Administrators Guide* for details.

Deleting a Compliance Action Rule

You can delete a Compliance Action rule only if it is not being used by any [ControlPoint Policies](#).

Setting Sensitive Content Manager EndPoints and Managing Scanning Preferences

ControlPoint Application Administrators use the ControlPoint Sensitive Content Manager Configuration dialog to set EndPoints to point to the server(s) on which Sensitive Content Manager is configured. Members of the Compliance Administrators group can also test the availability of each EndPoint and change default preferences for scanning content.

NOTE: ControlPoint Application Administrators can also configure EndPoints individually and update other configuration settings via ControlPoint Configuration Settings - Compliance settings.

To launch the ControlPoint Sensitive Content Manager Configuration dialog:

From the left navigation Manage tab, choose **Compliance > Sensitive Content Configuration Maintenance**.

Setting EndPoints

The Value of each Sensitive Content Manager EndPoint must be set to point to the server(s) on which Sensitive Content Manager is configured your environment. Use the information in the following table for guidance.

The image displays two screenshots of the 'ControlPoint Sensitive Content Manager Configuration settings' dialog. Both screenshots show the same configuration options, but the top one has a blue border and the bottom one has a white border.

Configuration Settings | EndPoint Testing

ControlPoint Sensitive Content Manager Configuration settings		Update
Sensitive Content Manager Upload EndPoint:	<input type="text" value="https://bos-c-scm.axcelertest.local:44303"/>	
Sensitive Content Manager Results EndPoint:	<input type="text" value="https://bos-c-scm.axcelertest.local:44302"/>	
Sensitive Content Manager Profile EndPoint:	<input type="text" value="https://bos-c-scm.axcelertest.local:44304"/>	
Sensitive Content Manager Search Terms EndPoint:	<input type="text" value="https://bos-c-scm.axcelertest.local:44305"/>	
Automatically add Scan Results column and update with severity level in SharePoint Lists	<input type="button" value="True"/>	
Automatically add Terms detected column and update with severity level in SharePoint Lists	<input type="button" value="False"/>	
Include text in list items in addition to files when performing Content Analysis	<input type="button" value="False"/>	
Allow use of ControlPoint Policies to automatically scan items added or updated in SharePoint lists	<input type="button" value="True"/>	

Configuration Settings | EndPoint Testing

ControlPoint Sensitive Content Manager Configuration settings		Update
Sensitive Content Manager Upload EndPoint:	<input type="text" value="https://bos-c-scm.axcelertest.local:44303"/>	
Sensitive Content Manager Results EndPoint:	<input type="text" value="https://bos-c-scm.axcelertest.local:44302"/>	
Sensitive Content Manager Profile EndPoint:	<input type="text" value="https://bos-c-scm.axcelertest.local:44304"/>	
Sensitive Content Manager Search Terms EndPoint:	<input type="text" value="https://bos-c-scm.axcelertest.local:44305"/>	
Automatically add Scan Results column and update with severity level in SharePoint Lists	<input type="button" value="True"/>	
Automatically add Terms detected column and update with severity level in SharePoint Lists	<input type="button" value="False"/>	
Include text in list items in addition to files when performing Content Analysis	<input type="button" value="False"/>	

Endpoint	Description	Value*
Sensitive Content Manager Upload EndPoint	The URL for the Sensitive Content Manager for sending files. This corresponds to the File Upload URL specified at the time Sensitive Content Manager was installed.	http://<server.domain> (or if installed on multiple servers: http://<server.domain>:port)
Sensitive Content Manager Results EndPoint	The URL for the Sensitive Content Manager service for retrieving files job results. This corresponds to the Results Service URL specified at the time Sensitive Content Manager was installed.	http://<server.domain> (or if installed on multiple servers: http://<server.domain>:port)
Sensitive Content Manager Profile EndPoint	The URL for the Sensitive Manager service for retrieving profiles. This corresponds to the Profile Service URL specified at the time Sensitive Content Manager was installed.	http://<server.domain> (or if installed on multiple servers: http://<server.domain>:port)
Sensitive Content Manager Search Terms	The URL for the Sensitive Content Manager service for retrieving rules used to identify a specific kind of sensitive content. This corresponds to the Subquestion Service URL specified at the time Sensitive Content Manager was installed.	http://<server.domain> (or if installed on multiple servers: http://<server.domain>:port)

* If you have upgraded from a pre-8.0 version of ControlPoint, default values that end with the text "onmetalogix.com" must be overwritten.

When you have finished setting EndPoints, click **[Update]**.

Testing Availability of EndPoints, File Upload, and Results

From the **EndPoint Testing** tab, you can test the availability of each endpoint that you set, as well as whether files can be uploaded to/received from Metalogix Sensitive Content Manager.

If you click a **[Test EndPoint]** button and the status returns as **Unavailable**, make sure that the URL is correct and that the service is available on the Metalogix Sensitive Content Manager server side.

If you click **[Test File Upload]**, ControlPoint will send a sample file to Metalogix Sensitive Content Manager, and will display a log of the action. If you then click **[Test File Results]**, ControlPoint will log the progress of the file's return.

Configuration Settings

EndPoint Testing

ControlPoint Sensitive Content Manager EndPoint Testing

Sensitive Content Manager Upload EndPoint: https://bos-c-scm.axcelertest.local:44303

Availability Status: Available

Test EndPoint

Sensitive Content Manager Results EndPoint: https://bos-c-scm.axcelertest.local:44302

Availability Status: Available

Test EndPoint

Sensitive Content Manager Profile EndPoint: https://bos-c-scm.axcelertest.local:44304

Availability Status: Available

Test EndPoint

Sensitive Content Manager Search Terms EndPoint: https://bos-c-scm.axcelertest.local:44305

Availability Status: Available

Test EndPoint

Test File Upload

Test File Results

Sending File

File Accepted

Retrieving File Results check 1

File Name: 1553bc52-1ab3-4cc2-b040-d566d34b0647.zip ; Status: Completed

Managing Scanning Preferences

ControlPoint can create columns called Scan Results and/or Terms Detected. Each time a scan is performed, the Severity Level is populated for the scanned item.

Name	Modified	Modified By	Scan Result	Terms Detected	
IT-2104 NYS Tax Form-signed.pdf	September 11	Testbench Farm Display	Severe	Address,Contextual Information,Government Identification Number,Name,Telephon Number	
Cover Compliance.ppt	September 11	Testbench Farm Display	Passed		
Copomplete Equity - Prof Liabili...	September 11	Testbench Farm Display	Moderate	Address,Government Identification Number,Name,Telephon Number	

ControlPoint Application Administrators can allow this column to be created/populated by changing the value(s) of **Automatically add Scan File Results column and update with severity level in SharePoint Lists** and/or **Automatically Add Terms Detected column and update with severity level in SharePoint Lists** from *false* to *true*.

By default, ControlPoint Compliance Administrators have the options to **Scan item for sensitive data when content is added** and **Scan item for sensitive data when content is updated or saved** when creating [ControlPoint Policies](#). ControlPoint Application Administrators can, however, hide these options by changing the value of the ControlPoint Setting Allow use of ControlPoint Policies to automatically scan items added or updated in SharePoint lists from *True* to *False*.

Submitting Content to Sensitive Content Manager

[Members of the ControlPoint Compliance Administrators group](#) can use the ControlPoint Analyze Content action to submit content to the Metalogix Sensitive Content Manager where it will be scanned for potentially sensitive content. ControlPoint submits the following types of content for scanning:

- files within Document Libraries with the following extensions:

NOTE: Checked out files are not scanned. You can run a [Checked Out Documents analysis](#) to identify these files.

- .7z ▪ .log ▪ .rar
- .arj ▪ msg ▪ .tar
- .bz2 ▪ .odt ▪ .tbz2
- .bzip ▪ .pdf ▪ .tgz
- .doc ▪ .pps ▪ .txt
- .docx ▪ .ppt ▪ .xls
- .eml ▪ .pptx ▪ .xlsx
- .gz ▪ .rtf ▪ .zip

- items within most types of lists (with or without attachments that have any of the file extensions listed above).

NOTE: If a [ControlPoint Policy](#) has been created to "Scan item for sensitive data..." content will automatically be submitted when the policy is triggered.

To submit content to Metalogix Sensitive Content Manager for analysis:

IMPORTANT: If you have upgraded to Metalogix Sensitive Content Manager 2.0 or later from an earlier version, pending [content submissions](#) that use the older [Profiles](#) may need to be re-created.

- 1 [Select the object\(s\) containing the items that you want to submit for analysis.](#)
- 2 Choose **Compliance > Analyze Content**.

REMINDER: Sensitive Content Manager must be installed and in your environment and you must be a member of the [ControlPoint Compliance Administrators](#) group to use this functionality.

- 3 Enter a name and description for the scan.
- 4 If different from the default (PII - Personal Identification Information), select a **Profile for this scan** from the drop-down.

See also [Managing SCM Profiles](#).

- 5 If you want to **Resubmit files that have not changed since they were previously scanned**, check this box.

NOTE: If you leave this box unchecked, previously-scanned files that have not changed will be excluded. You cannot resubmit scan if it is uploading, an action is taken or if profile no longer exists.

- 6 Include one or more list types from the list box. (If you also want to **Include attachments**, check this box.)
- 7 Now you can:

- run the operation immediately (by clicking **[Analyze]**)

OR

- [schedule the operation to run at a later time or on a recurring schedule](#)

OR

- [save the operation as XML Instructions](#) that can be run at a later time.

A [ControlPoint Task Audit](#) is generated for the submission. You can monitor the progress of the submission via the [Sensitive Content Manager Submission Maintenance](#) page.

Compliance Action Severity Levels

When content is analyzed by the Metalogix Sensitive Content Manager, it is evaluated against the following three severity levels, as defined in the [Sensitive Content Manager Profile](#) used for the content analysis.


- Severe
- Moderate
- Mild

Compliance Administrators specify the appropriate action to take for each severity level via the [ControlPoint Compliance Actions page](#).



How Embedded Files are Handled After a Compliance Scan

Embedded files include:

- files within containers such as zip and rar files.

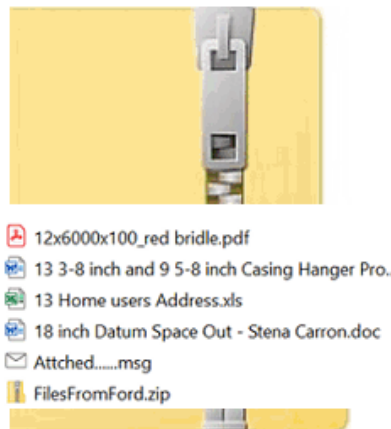

- files within documents in document libraries or within attachments to list items such as Tasks, Calendars, and Announcements.



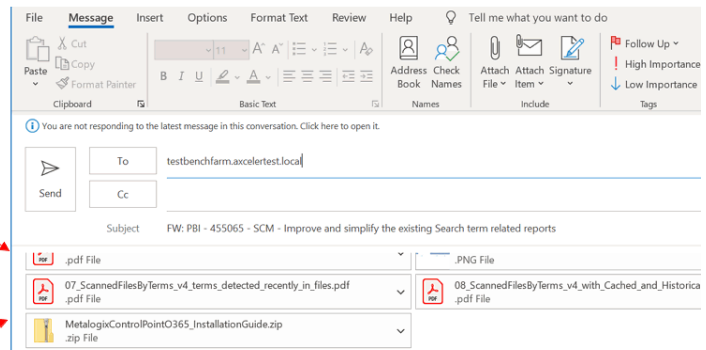
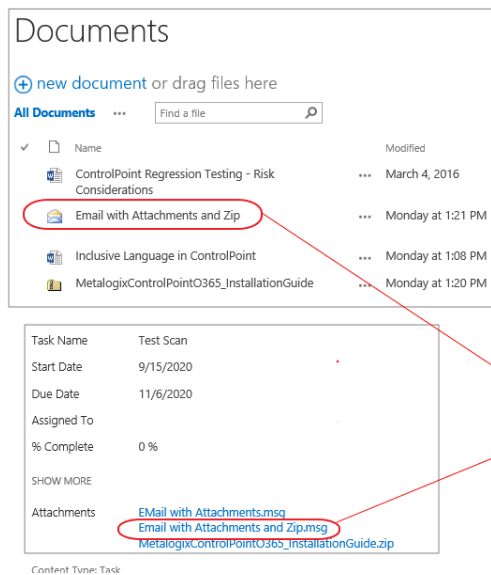


After a SharePoint document or list item is scanned for compliance, Sensitive Content Manager will scan embedded files within the item or document.

How Classifications are applied

If a list item or document contains embedded files, the highest severity level found will be applied to the parent.

For example, if a list item includes a zip file containing both Passed and Severe files, the zip file will be classified as Severe and the parent item will also be classified as Severe, even if the item itself did not contain severe content.

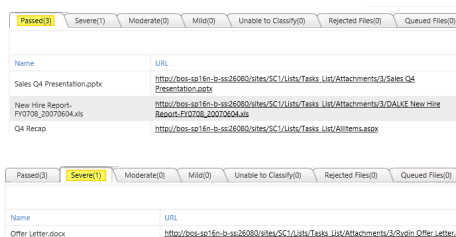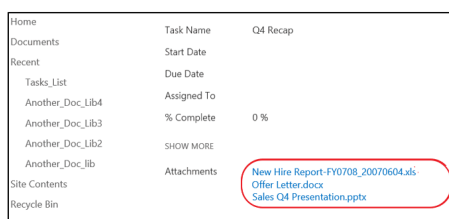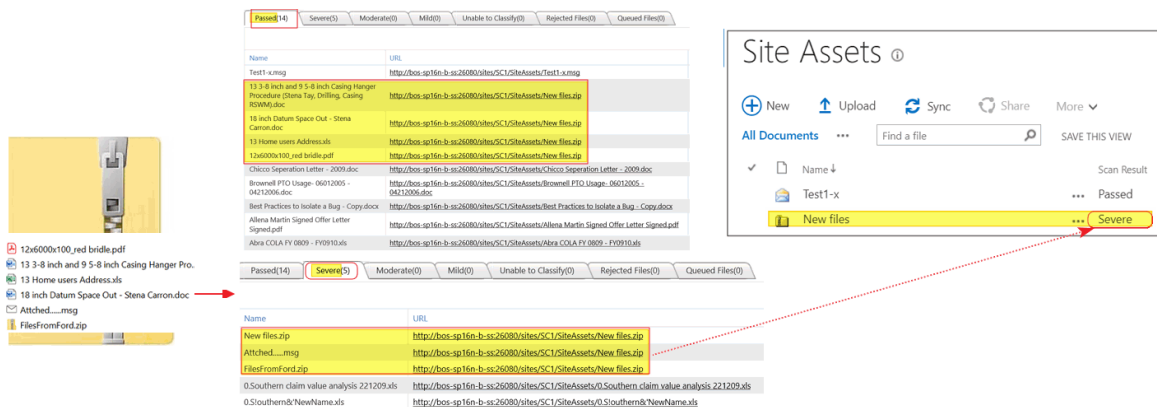

Embedded files within embedded files

Sensitive Content Manager will scan and classify embedded files within embedded files (for example, files within a zip file that is attached to an email) However, while the **[FINISH]**

Actions that can be taken

The following limitations apply to the actions that can be taken:

Remove from SharePoint:

- If you remove a list item from SharePoint, all embedded files and their contents will also be removed.
- You can remove embedded files without also removing the parent item.

Quarantine/Remove from Quarantine

- If you quarantine a list item, all embedded files must also be quarantined.
- You cannot remove embedded files from quarantine without removing the list item.

Managing Sensitive Content Manager Submissions

From the Sensitive Content Submission Maintenance page, ControlPoint Compliance Administrators can:

- monitor the progress of jobs that have been submitted to Metalogix Sensitive Content Manager for compliance scanning
- view a detailed analysis of compliance scan results
- manage compliance actions
- resubmit previously scanned jobs
- delete jobs

To launch the Sensitive Content Submission Maintenance page:

From the Manage pane, choose **Compliance > Sensitive Content Submission Maintenance**.

Only include submissions: Start Date: 9/11/2020 4:03 PM End Date: 9/18/2020 4:03 PM Find scan jobs

☒ Bulk Scans
 ☐ ControlPoint Policy Scans

☐ Auto Refresh Monitor
 Refresh Rate: 60 Seconds
 Auto refresh mode is off

	Date	Name	Description	Status	Documents in Scope	Uploaded	Scanned	Skipped	Unsupported	In Progress	In Queue	Scan Failed	Detailed Analysis	View Summary	Task Audit
<input type="checkbox"/>	9/16/2020 4:09:28 PM	Compliance Scan 9/16/2020 4:09:27 PM		Completed	4	4	4	0	0	0	0	0	View	View	View
<input type="checkbox"/>	9/11/2020 5:59:57 PM	Compliance Scan 9/11/2020 5:59:57 PM	SCM1-PII	Completed	55	46	46	2	7	0	0	0	View	View	View
<input type="checkbox"/>	9/11/2020 5:50:35 PM	Compliance Scan 9/11/2020 5:50:35 PM	WAP2-SC1	Completed	3	1	1	0	2	0	0	0	View	View	View

Select the type of scan jobs you want to view/edit. Use the information in the following table for guidance.

If you want to view ...	Select ...
all jobs submitted to Metalogix Sensitive Content Manager via the ControlPoint Analyze Content action, regardless of whether Compliance Actions were applied	Bulk scans.
all items submitted to Metalogix Sensitive Content Manager as a result of the enforcement of a ControlPoint Policy	ControlPoint Policy scans.

In addition the current **Status** of each job (e.g., Uploading, Waiting for Results, Completed), ControlPoint displays the number of items within each job that are:

- **Submitted** by ControlPoint to the Sensitive Content Manager service for scanning
 - **Uploaded** to Sensitive Content Manager
 - **Reviewed** (scanned)
 - **Skipped** (omitted from the scan; for example, if Sensitive Content Manager was unable to read an item's contents)
 - **Unsupported** by Sensitive Content Manager
- NOTE: For a list of supported file types, see [Submitting Content to Sensitive Content Manager](#).
- **In Queue** (waiting to be scanned).

You can also link to:

- a [Detailed Analysis](#) of compliance scan results
- the [Compliance Summary](#) page, where you can manage compliance scan results
- the [ControlPoint Task Audit](#) for the job.


Resubmitting Scanned Jobs

When you resubmit a job from this page, it will be submitted exactly as originally defined. (For example, it will not include any files that have been added to a SharePoint list or library since the last scan.) However, any items that have been quarantined since the last scan or have already been flagged "Unsupported" will not be included in the submission.

Jobs that are uploading, have a status of "Compliance Actions Taken," or use a Profile that no longer exists cannot be resubmitted. If you want a set of files for which actions have been taken to be rescanned, create and submit a new job for the same scope.

Deleting Scanned Jobs

If you attempt to delete one or more scanned jobs, you will be prompted to confirm your selection.

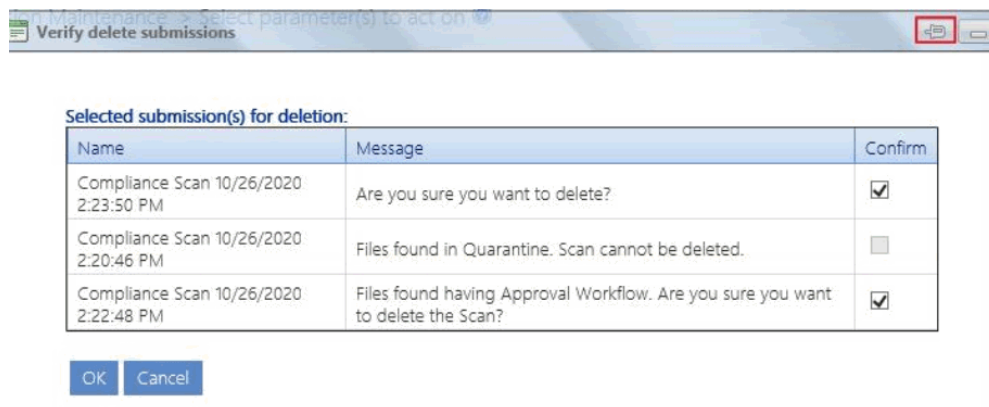

Note that:

- you cannot delete a job that has files in quarantine, and the option will be disabled (you can, however, use the [Manage Scanned Files](#) action to remove quarantined files from SharePoint).

AND

- you will have the opportunity to deselect any file that has had an Approval Workflow compliance action applied.

Managing Compliance Action Scan Results

[Members of the ControlPoint Compliance Administrators group](#) can view and take action on Content Analysis scan job results returned by the Metalogix Sensitive Content Manager via the Compliance Summary page. You can:

- view the details of a Compliance Action job
- apply Compliance Actions
- [view detailed information about scan results for individual items](#) (and reclassify items that returned from Metalogix Sensitive Content Manager with a status of "Unable to Classify")
- [manage scanned files \(including those that have been quarantined\)](#)

- save items of a particular severity level as a selection that can be used to perform ControlPoint operations.

To manage Compliance Action scan results:


- 1 [Select the object\(s\) containing the scan jobs you want to view/edit.](#)
- 2 Choose **Compliance > Compliance Summary**.
NOTE: You can also access this page for a specific job from the [Analyze Content page](#), via the **Page View** link.
- 3 If you want to view jobs for a different date range, change the **Start** and/or **End** dates and click **[Find Scan Jobs]**.
- 4 Select the type of scan jobs you want to view/edit. Use the information in the following table for guidance.

If you want to view ...	Select ...
all jobs submitted to Metalogix Sensitive Content Manager via the ControlPoint Analyze Content action, regardless of whether Compliance Actions were applied	Bulk scans.
all items submitted to Metalogix Sensitive Content Manager as a result of the enforcement of a ControlPoint Policy	ControlPoint Policy scans.
all jobs for which Compliance Actions have been applied.	Compliance Action jobs.

- 5 Click **[Find scan jobs]**.
- 6 Select the job whose details you want to view.


The following details about the selected job display beneath the grid:

- **Classification Result Counts** - The number of items that fall into each classification
- **Scan information** - Description of and metrics associated with the job itself
- **Scan Results Summary** - A pie chart that shows the distribution of items among classifications.

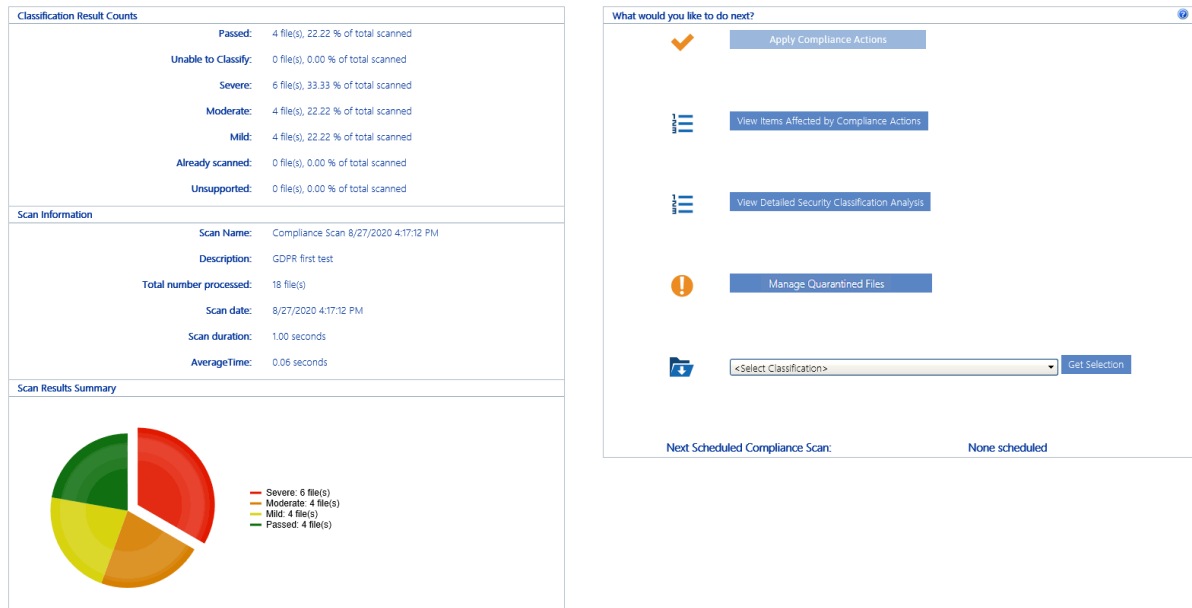

To save items of a selected severity as a ControlPoint selection:

1. Select a classification from the drop-down then click **[Get Selection]**.



2. Follow the procedure for [Saving and Re-Using a SharePoint Object Selection](#).




Acting on Compliance Analysis Results


From the [Compliance Summary page](#), you can take a number of compliance actions on returned SCM scans. Use the information in the following table to determine the appropriate action to take.

NOTE: Any option that is not valid for the result set is not available for selection. For example, if you are viewing Compliance Action jobs, the option to Apply Compliance Actions will be disabled.

If you want to ...	Then ...
view more detailed information about scan results for individual items (and, optionally, export results for closer analysis)	<ul style="list-style-type: none"> from the Sensitive Content Submission Maintenance page, select the applicable Detailed Analysis View link. <p>OR</p> <ul style="list-style-type: none"> from the Compliance Summary page, click [View Detailed Classification Analysis].

If you want to ...	Then ...																																												
	<div>Detailed Security Classification Analysis > Select parameter(s) to act on</div> <div>Scan name Compliance Scan 6/10/2015 12:16:49 PM</div> <div>Scan date 6/10/2015 12:17:16 PM</div> <div>File Name contains: <input type="text"/> <input type="button" value="Reset"/></div> <div><div>Passed (129) Severe (19) Moderate (37) Mild (19) Unable to Classify (0)</div><div><div>XLS Format</div><div>Export</div></div><table><thead><tr><th>Name</th><th>URL</th><th>Created By</th><th>Last Modified By</th></tr></thead><tbody><tr><td>xcStorageReport2010-12-23 16.50.13.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 16.50.13.pdf</td><td>System Account</td><td>System Account</td></tr><tr><td>xcStorageReport2010-12-23 14.50.13.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 14.50.13.pdf</td><td>System Account</td><td>System Account</td></tr><tr><td>xcStorageReport2010-12-23 13.50.12.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 13.50.12.pdf</td><td>System Account</td><td>System Account</td></tr><tr><td>xcStorageReport2010-12-23 12.50.14.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 12.50.14.pdf</td><td>System Account</td><td>System Account</td></tr><tr><td>xcStorageReport2010-12-23 10.50.12.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 10.50.12.pdf</td><td>System Account</td><td>System Account</td></tr><tr><td>xcStorageReport2010-12-23 09.50.12.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 09.50.12.pdf</td><td>System Account</td><td>System Account</td></tr><tr><td>xcStorageReport2010-12-23 08.50.12.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 08.50.12.pdf</td><td>System Account</td><td>System Account</td></tr><tr><td>xcStorageReport2010-12-23 05.01.00.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 05.01.00.pdf</td><td>System Account</td><td>System Account</td></tr><tr><td>xcStorageReport2010-12-23 02.50.59.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 02.50.59.pdf</td><td>System Account</td><td>System Account</td></tr><tr><td>xcStorageReport2010-12-22 23.51.00.pdf</td><td>http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-22 23.51.00.pdf</td><td>System Account</td><td>System Account</td></tr></tbody></table><div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div><div>6</div><div>7</div><div>8</div><div>9</div><div>10</div><div>...</div><div>Page size: 10</div><div>129 items in 13 pages</div></div></div>	Name	URL	Created By	Last Modified By	xcStorageReport2010-12-23 16.50.13.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 16.50.13.pdf	System Account	System Account	xcStorageReport2010-12-23 14.50.13.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 14.50.13.pdf	System Account	System Account	xcStorageReport2010-12-23 13.50.12.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 13.50.12.pdf	System Account	System Account	xcStorageReport2010-12-23 12.50.14.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 12.50.14.pdf	System Account	System Account	xcStorageReport2010-12-23 10.50.12.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 10.50.12.pdf	System Account	System Account	xcStorageReport2010-12-23 09.50.12.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 09.50.12.pdf	System Account	System Account	xcStorageReport2010-12-23 08.50.12.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 08.50.12.pdf	System Account	System Account	xcStorageReport2010-12-23 05.01.00.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 05.01.00.pdf	System Account	System Account	xcStorageReport2010-12-23 02.50.59.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 02.50.59.pdf	System Account	System Account	xcStorageReport2010-12-22 23.51.00.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-22 23.51.00.pdf	System Account	System Account
Name	URL	Created By	Last Modified By																																										
xcStorageReport2010-12-23 16.50.13.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 16.50.13.pdf	System Account	System Account																																										
xcStorageReport2010-12-23 14.50.13.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 14.50.13.pdf	System Account	System Account																																										
xcStorageReport2010-12-23 13.50.12.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 13.50.12.pdf	System Account	System Account																																										
xcStorageReport2010-12-23 12.50.14.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 12.50.14.pdf	System Account	System Account																																										
xcStorageReport2010-12-23 10.50.12.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 10.50.12.pdf	System Account	System Account																																										
xcStorageReport2010-12-23 09.50.12.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 09.50.12.pdf	System Account	System Account																																										
xcStorageReport2010-12-23 08.50.12.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 08.50.12.pdf	System Account	System Account																																										
xcStorageReport2010-12-23 05.01.00.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 05.01.00.pdf	System Account	System Account																																										
xcStorageReport2010-12-23 02.50.59.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-23 02.50.59.pdf	System Account	System Account																																										
xcStorageReport2010-12-22 23.51.00.pdf	http://2010foundation/sites/alpha/Project Documents/xcStorageReport2010-12-22 23.51.00.pdf	System Account	System Account																																										
	<p>Note that there is a separate tab for each classification, with detail about each item for which scan results were returned.</p> <p>If you want to download a tabs-worth of results:</p> <div><div>a) Choose one of the following export formats:</div><div><div>▪ XLS format (for opening in a pre-2007 version of Excel)</div><div>▪ Excel XML format (for opening in Excel 2007 or later)</div><div>▪ PDF format</div></div><div>b) Click [Export].</div></div>																																												
re-classify an item that returned "Unable to Classify"	<p>see Reclassifying Items Returned as Unable to Classify.</p> <p>If you want an action to be taken on any items that were returned by Metalogix Sensitive Content Manager as 'Unable to Classify,' you must reclassify them before applying Compliance Actions to the scan job.</p>																																												
manage scanned files	see Managing Scanned Files .																																												
apply Compliance Actions to the selected job	<div><div>a) From the Compliance Summary page, click [Apply Compliance Actions].</div><div><div>NOTE: This option is not available if you filtered results by Compliance Action Jobs.</div></div><div>b) Either:</div><div><div>▪ select a previously-defined Compliance Action from the drop-down</div><div>OR</div><div>▪ define a new Compliance Action.</div></div></div>																																												

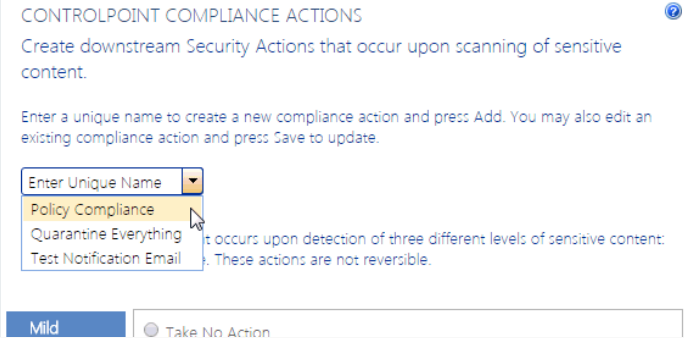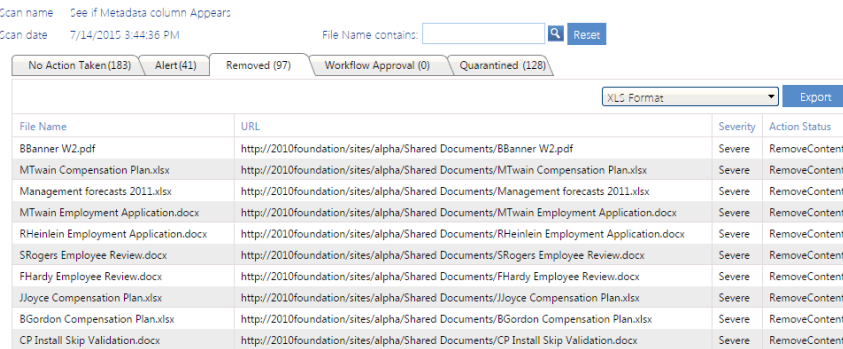If you want to ...	Then ...
	<p>WARNING: If you choose to Update Existing Compliance Actions, the changes will be applied to all scan jobs that use it going forward. This is especially noteworthy in the case of ControlPoint Policies, because once the policy is created the most current definition of the Compliance Actions is applied automatically based on scan results.</p>  <p>c) When finished, click [Apply actions to current scan].</p>
<p>view items for which Compliance Actions have been taken</p>	<p>from the Compliance Summary page, click [View Items Affected by Compliance Actions].</p>  <p>Note that there is a separate tab for each action taken, with a list of items and the associated classifications returned by Metalogix Sensitive Content Manager.</p> <p>If you want to download a tabs-worth of results:</p> <ol style="list-style-type: none"> Choose one of the following export formats: <ul style="list-style-type: none"> XLS format (for opening in a pre-2007 version of Excel) Excel XML format (for opening in Excel 2007 or later) PDF format Click [Export].
<p>download items of a particular severity level</p>	<ol style="list-style-type: none"> from the Compliance Summary page drop-down to the right of the  icon, select a Classification (Severity Level).

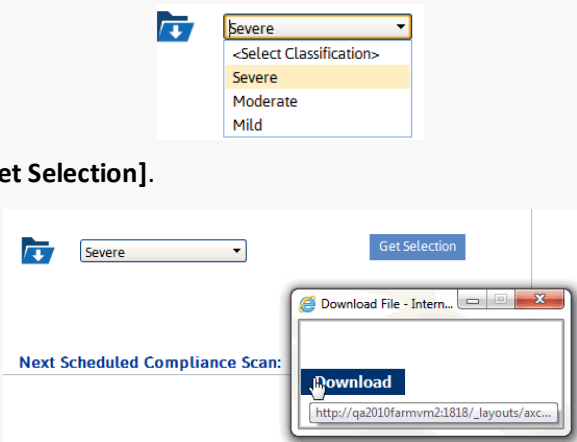If you want to ...	Then ...
(Mild, Moderate. or Severe) as a reusable selection on which you can perform ControlPoint operations	<p data-bbox="523 465 820 499">b) Click [Get Selection].</p>  <p data-bbox="523 786 1350 891">You can now download and save the file, then upload it as a selection when performing a ControlPoint operation that involves list items. See Saving and Re-Using a SharePoint Object Selection.</p>

NOTE: If you want to review compliance actions for a selected scope and date range, you can generate a Compliance Actions Audit.

Reclassifying Items Returned as Unable to Classify

If an item is returned from Metalogix Sensitive Content Manager with a Classification of 'Unable to Classify,' it means that the service detected "probable" sensitive content but was unable to classify it *definitively* as sensitive content. You can, however, review the file and apply a classification manually before applying a Compliance Action to the scan job.

If you want an action to be taken on any items that were returned by Metalogix Sensitive Content Manager as 'Unable to Classify,' you must reclassify them before applying Compliance Actions to the scan job.

To reclassify items returned as 'Unable to Classify':

- 1 From the Detailed Security Classification Analysis page, select the **Unable to Classify** tab.
- 2 Select the item(s) to which you want to apply a particular classification.

Scan name Let's try scanning attachments again


Scan date 6/16/2015 5:48:13 PM

File Name contains:

Passed (2) Severe (0) Moderate (0) Mild (0) Unable to Classify (3)				
		Passed	<input type="button" value="Reclassify"/>	<input type="button" value="Export"/>
<input checked="" type="checkbox"/>	Name	URL	Created By	Last Modified By
<input checked="" type="checkbox"/>	RiskAssessment.doc	http://2010foundation/sites/alpha/baking/Shared Documents/RiskAssessment.doc	System Account	James Joyce
<input checked="" type="checkbox"/>	ProfitabilityAnalysis.doc	http://2010foundation/sites/alpha/baking/Shared Documents/ProfitabilityAnalysis.doc	System Account	System Account
<input checked="" type="checkbox"/>	PrivateCellPhoneNumbers.doc	http://2010foundation/sites/alpha/baking/Shared Documents/PrivateCellPhoneNumbers.doc	System Account	System Account

NOTE: If you want to review the contents of an item before assigning a classification, click the URL link to open the item.

- 3 Select a classification from the drop-down, then click **[Reclassify]**.

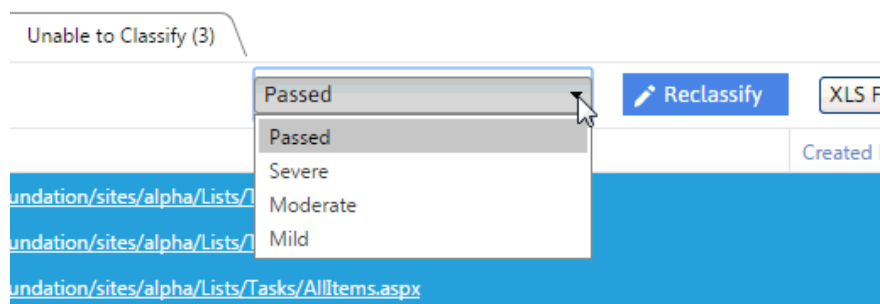

You will be prompted to confirm the action before continuing.

CAUTION: Once you reclassify an item, the drop-down becomes disabled and the item cannot be reclassified again. If Compliance Actions have already been applied to the scan job containing the item(s), the Reclassify option will no longer appear on the page.

Once an item has been reclassified:

- it will be moved to the appropriate tab for the classification

AND

- the classification change(s) will be reflected on the Compliance Summary page.

Managing Scanned Files

Use the **Manage Scanned Files** operation to review and act on files that have been scanned for compliance. You can:

- apply filters to further refine the results that display in the grid
- choose to "ignore" (that is, hide from the grid) files that do not require review or action


EXCEPTION: Quarantined files cannot be ignored.

- link to individual files to review their content
- remove files from quarantine

- remove files from SharePoint.

To manage scanned files:

- 1 Use the information in the following table to determine the appropriate action to take.

If you are starting from ...	Then ...
the SharePoint Hierarchy	<ol style="list-style-type: none"> Select the object(s) containing the scanned files you want to manage. Choose Compliance > Manage Scanned Files. NOTE: This option is not available at the farm or Web application level.
the Compliance Summary page	<ol style="list-style-type: none"> Make sure the Compliance Action jobs radio button is selected. Select the Scan job containing the files you want to manage. Click [Manage Scanned Files]. 

Manage Scanned Files > Select parameter(s) to act on ?

File/Item Name contains :

Search Terms :

☐ Include Ignored Files ☐ Show only Quarantined Files

Selected Search Terms:

<input type="button" value="Remove from Quarantine"/> <input type="button" value="Remove from SharePoint"/> <input type="button" value="Ignore"/> <input type="button" value="Unignore"/>						
<input type="checkbox"/>	File/Item Name	File Path	Terms Detected	Created By	Last Modified By	Status
<input type="checkbox"/>	Datenbank zwolf_Mild.txt	http://bos-sp13-a-ss:41700/ContentAddedLib/Datenbank zwolf_Mild.txt	LUHN10	axcelertest\testbenchfarm	axcelertest\testbenchfarm	-
<input type="checkbox"/>	données hospitalières_Mode	http://bos-sp13-a-ss:41700/ContentAddedLib/données hospitalières_Moderate.pptx	Name	Testbench Farm Display	Testbench Farm Display	-
<input type="checkbox"/>	Mild - Copy.txt	http://bos-sp13-a-ss:41700/ContentAddedLib/Mild - Copy.txt	LUHN10	Testbench Farm Display	Testbench Farm Display	Quarantined
<input type="checkbox"/>	Mild's Copy.txt	http://bos-sp13-a-ss:41700/ContentAddedLib/Mild's Copy.txt	LUHN10	axcelertest\testbenchfarm	axcelertest\testbenchfarm	-
<input type="checkbox"/>	Österreich Präsentation_mode	http://bos-sp13-a-ss:41700/ContentAddedLib/Österreich Präsentation_moderate.pptx	Name	axcelertest\testbenchfarm	axcelertest\testbenchfarm	-
<input type="checkbox"/>	Severe's file.pptx	http://bos-sp13-a-ss:41700/ContentAddedLib/Severe's file.pptx	Name	Testbench Farm Display	Testbench Farm Display	Quarantined

3. To filter items that display in the grid:

- Enter a full or partial file name in the **File Name Contains** field, and/or select specific **Search Terms** from the drop-down.

The screenshot shows the Sensitive Content Manager interface. On the left, there are search filters: 'e/Item Name contains:' with an empty text box, 'arch Terms:' with a dropdown menu showing 'Items checked', and 'Include Ignored Files' with a checkbox. Below these are checkboxes for 'Check All', 'Name', 'Address', 'Email', 'Telephone Number', 'Government Identification Number' (checked), and 'Financial Account Numbers' (checked). On the right, 'Selected Search Terms:' shows 'Government Identification Number, Financial Account Numbers'. At the bottom, there are buttons 'Remove from SharePoint', 'Ignore', and 'Unignore'. A table below shows columns for 'File/Item Name', 'File Path', 'Created By', 'Last Modified By', and 'Status'.

- If you want to **Include Ignored Files** (which are hidden by default), check the applicable box(es).

REMINDER: "Ignore" is a status that you can apply to files that you do not want to display in the grid by default (because, for example, they do not require further review or action).

NOTE: Because quarantined files cannot be ignored, if you select **Show Only Quarantined Files**, the **Include Ignored Files** option becomes disabled. If you upgraded from version 8.5, all quarantined files will always display, even those that show a status of Ignored.

- Click **[Apply Filters]**.

Note that if you chose to include Ignored or Quarantined files, they will be labeled as such in the **Status** field.

TIP: If you want to review quarantined or Ignored files specifically, sort on the Status column to group these files together.

Now you can:

- open a file whose contents you want to review (by clicking the **File Path** link)

File Path

http://bos-sp19-a-wfe1:17504/sites/SC1/Shared Documents/Copomplete Equity - Prof Liability Renewal 02012009/02012009.xls

AND/OR

- select files on which you want to perform an action, then click the appropriate action button: **[Remove from Quarantine]**, **[Remove from SharePoint]**, **[Ignore]**, or **[Unignore]**.

Note that when a file is removed from SharePoint it no longer displays in the grid.

NOTE: When you remove a file from quarantine, it is restored in its original location with the same permissions it had before it was quarantined, and you cannot remove an attachment from quarantine without also removing its parent item.

Removing Scanned Files from SharePoint

If you attempt to remove one or more files from SharePoint, you will be prompted to confirm your selection. Unlike the [Sensitive Content Submission Maintenance](#) feature, you can remove individual files which has been quarantined.

If you delete an item that has attachments, the attachments will automatically be deleted along with the item.

Analyzing Scanned Files

The **Scanned Files by Search Term** and **Scanned Files by Scope** analyses let you view all of the files that have been scanned for sensitive content, along with the search term(s) found. By default, results display the most recent scan performed on each file within the selected scope, but you can also enter a date range.

To generate a Scanned Files analysis:

- 1 [Select the object\(s\) you want to include in your analysis.](#)
- 2 RightChoose the appropriate option, based on how you would like to have results grouped:

- **Compliance > Scanned Files by Scope**

OR

- **Compliance > Scanned Files by Search Terms.**

- 3 [Specify the parameters for your analysis.](#)

IMPORTANT:

- Currently, you can only Filter by Search Terms if you enter one complete search term (that is, you cannot filter by multiple or partial search terms).

Filter By Search Terms:

If you leave the Filter by Search Terms field blank, all search terms within the scope of your analysis will be included.

- 4 Under **Advanced Parameters:**

Advanced Parameters ⓘ

Start date: ⓘ

End date: ⓘ

☐ Security trimming using cached permissions

- If you leave the **Start Date** and **End Date** blank (the default), the *most recent* scan performed on each scanned file will be included in analysis results. If you enter a Start Date and End Date, results will include all scans performed within the date range.

- If you want to run the analysis on scans for which the permissions of users who performed the scans were collected since the last run of [ControlPoint Discovery](#), check the **Security trimming using cached permissions** box. If you leave this box unchecked, the analysis will be run using real-time permissions, but processing time may increase significantly.

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Results are grouped either by scope or search term (depending on the analysis selected).

Scanned files by Scope

Parameters:
 Search Term Name: Name, Address, Telephone Number
 Show only scanned file(s) where search terms detected: True
 Permissions cached as on: False

Web Application: WAP1 - 13946
 Site Collection: JR-DC1
 Web Site: JR-DC1
<http://bos-sp16n-b-sa-13946/sites/JR-DC1>

List	Search Terms	Detected On	Created By	Modified By	Last Updated
Content and Structure Reports / Reports List/AllItems.aspx					
Item 1: Checked Out To Me	Name	10/14/2020 7:07:03 PM	System Account	QAServiceAcct	10/14/2020 3:09:36 PM
Item 5: All Draft Documents	Name	10/14/2020 7:07:04 PM	System Account	QAServiceAcct	10/14/2020 3:09:32 PM
Item 6: Going Live Within Next Seven Days	Name	10/14/2020 7:07:04 PM	System Account	QAServiceAcct	10/14/2020 3:09:34 PM
Documents / Documents/Forms/AllItems.aspx					
Item 6: Moderate - Copy (3).pptx	Name	10/14/2020 7:07:05 PM	Testbench Farm Display	Testbench Farm Display	10/14/2020 3:02:33 PM
Item 8: Severe - Copy (3).pptx	Name	10/14/2020 7:07:05 PM	Testbench Farm Display	Testbench Farm Display	10/14/2020 3:02:33 PM
Item 9: Severe - Copy (5).pptx	Name	10/14/2020 7:07:05 PM	Testbench Farm Display	Testbench Farm Display	10/14/2020 3:02:34 PM
Item 10: Severe - Copy (7).pptx	Name	10/14/2020 7:07:05 PM	Testbench Farm Display	Testbench Farm Display	10/14/2020 3:02:34 PM
Site Collection: SC1 Web Site: SC1 http://bos-sp16n-b-sa-13946/sites/SC1					
David Custom List / Lists/David Custom List/AllItems.aspx					
Item 4: Attachments/4/Passed 2 version 1 Item 2 (2).pptx	Name	9/22/2020 5:24:51 PM	Testbench Farm Display	QAServiceAcct	8/31/2020 10:51:39 AM
Item 5: Attachments/5/Moderate - (2) tar / Moderate (2) - Copy - Copy - Copy.pptx	Name	9/22/2020 5:29:01 PM	Testbench Farm Display	Testbench Farm Display	9/22/2020 1:23:05 PM
Item 5: Attachments/5/Moderate - (1) tar / Moderate (2) - Copy - Copy - Copy.pptx	Name	9/22/2020 5:28:32 PM	Testbench Farm Display	Testbench Farm Display	9/22/2020 1:23:05 PM
Item 5: Attachments/5/Moderate - (2) tar	Name	9/22/2020 5:24:51 PM	Testbench Farm Display	Testbench Farm Display	9/22/2020 1:23:05 PM
Item 5: Attachments/5/Moderate - (1) tar	Name	9/22/2020 5:24:51 PM	Testbench Farm Display	Testbench Farm Display	9/22/2020 1:23:05 PM

Scanned files by Search terms

Parameters:
 Search Term Name: Name, Address, Telephone Number
 Show only scanned file(s) where search terms detected: True
 Permissions cached as on: False

Web Application: WAP2 - 26080
 Site Collection: SC1
 Web Site: SC1
<http://bos-sp16n-b-sa-26080/sites/SC1>

List	Detected On	Created By	Modified By	Last Updated
Another_Doc_Lib2 / Another_Doc_Lib2/Forms/AllItems.aspx				
Item 7: FLISA classification table 06302011-revised.xlsx	10/1/2020 11:49:09 PM	Testbench Farm Display	Testbench Farm Display	9/3/2020 6:46:43 AM
Item 8: Members of the Board Biographies 1_20070112.doc	10/1/2020 11:49:09 PM	Testbench Farm Display	Testbench Farm Display	9/3/2020 6:46:43 AM
Item 9: Rydin Offer Letter.docx	10/1/2020 11:49:09 PM	Testbench Farm Display	QAServiceAcct	9/3/2020 6:46:44 AM
Item 12: MagWith Attachments.msg	10/1/2020 11:49:09 PM	Testbench Farm Display	QAServiceAcct	9/3/2020 6:47:32 AM
Item 12: MagWith Attachments.msg / 0.Southern claim value analysis 221209.xls (1)	10/1/2020 11:50:28 PM	Testbench Farm Display	QAServiceAcct	9/3/2020 6:47:32 AM
Documents / Shared Documents/Forms/AllItems.aspx				
Item 39: Email with Attachments and Zip.msg / MetalogixControlPointQ365_InstallationGuide.zip	10/9/2020 12:33:52 PM	Testbench Farm Display	Testbench Farm Display	10/9/2020 7:53:53 AM
Item 39: Email with Attachments and Zip.msg / Quest_vacation plan (September 2020).msg	10/9/2020 12:33:52 PM	Testbench Farm Display	Testbench Farm Display	10/9/2020 7:53:53 AM
Item 39: Email with Attachments and Zip.msg / MetalogixControlPointQ365_UserGuide.pdf	10/9/2020 12:33:52 PM	Testbench Farm Display	Testbench Farm Display	10/9/2020 7:53:53 AM
Item 39: Email with Attachments and Zip.msg / MetalogixControlPointQ365_AdministrationGuide.pdf	10/9/2020 12:33:52 PM	Testbench Farm Display	Testbench Farm Display	10/9/2020 7:53:53 AM
Item 39: Email with Attachments and Zip.msg	10/9/2020 12:02:30 PM	Testbench Farm Display	Testbench Farm Display	10/9/2020 7:53:53 AM
Tasks List / Lists/Tasks List/AllItems.aspx				
Item 5: Attachments/5/Rydfin Letter_Notepad.txt	9/30/2020 5:01:07 PM	Testbench Farm Display	Testbench Farm Display	9/30/2020 1:00:42 PM
Item 5: Attachments/5/MagWith Attachments (1).msg	9/30/2020 5:01:07 PM	Testbench Farm Display	Testbench Farm Display	9/30/2020 1:00:42 PM
Item 5: Attachments/5/MagWith Attachments (1).msg / 0.Southern claim value analysis 221209.xls (1)	9/30/2020 5:02:13 PM	Testbench Farm Display	Testbench Farm Display	9/30/2020 1:00:42 PM



Auditing Compliance Actions

The Compliance Action Audit lists actions taken on files scanned by Sensitive Content Manager over a specified date range.

To generate a Compliance Actions Audit:

- 1 [Select the object\(s\) you want to include in the audit.](#)
- 2 Choose **Compliance > Compliance Actions Audit**.
- 3 [Specify the parameters for your analysis.](#)

Compliance Actions Audit > Select parameter(s) to act on ?

Start date:  End date: 

Include Compliance Action(s):

<ALL>

Quarantine

Remove from Quarantine

Remove from SharePoint

Approval Workflow

☒ Display with results expanded

Now you can:

- run the operation immediately (by clicking the **[Run Now]** button)

OR

- [schedule the operation to run at a later time or on a recurring basis.](#)

OR

- [save the operation as XML Instructions that can be run at a later time.](#)

Results include each file within the scope of your analysis, grouped by site collection, along with the date the scan was performed, the action taken, and the account the action was taken by.

NOTE: For any scans performed prior to version 8.6, the "by" displays **NA**, as this information was not captured for Compliance reporting purposes in earlier versions of ControlPoint.

Item 17: changes.pptx	
3/9/2021 9:34:10 AM: Action - ***Approval*** by	NA

Parameters:

Compliance Actions : <ALL>

Web Application: WAP2 - 9394	
Site Collection: SC1	http://bos-sp13-a-ss:9394/sites/SC1
Web Site: SC1	http://bos-sp13-a-ss:9394/sites/SC1
List: GBDocLib1 /GBDocLib1/Forms/AllItems.aspx	
Item 6: Mild - Copy - Copy (3).bt	
3/15/2021 6:20:45 PM: Action - "RemoveContent" by i:0#.w:axcelertest\testbenchfam.	
List: Shared Documents /Shared Documents/Forms/AllItems.aspx	
Item 3: 1 Mar 09 delivery confirmation.pdf	
3/11/2021 1:45:57 PM: Action - "RemoveFromQuarantine" by i:0#.w:axcelertest\testbenchfam.	
Item 4: 0 Southern claim value analysis 221209.xls	
3/11/2021 10:07:47 AM: Action - "RemoveFromQuarantine" by i:0#.w:axcelertest\testbenchfam.	
Site Collection: SC2	http://bos-sp13-a-ss:9394/sites/SC2
Web Site: SC2	http://bos-sp13-a-ss:9394/sites/SC2
List: Shared Documents /Shared Documents/Forms/AllItems.aspx	

Note that for files with embedded items, only the parent item is included in the audit.

Reporting on Sensitive Content Activity

If you are a member of the ControlPoint Compliance Administrators group, you can use the ControlPoint Sensitive Document Activity report to view detailed information about documents analyzed by Sensitive Content Manager that:

- have been identified as "sensitive content" (that is, have been assigned a Severity Level)
- AND

- have been accessed by at least one SharePoint user.


NOTE: This report includes sensitive content identified both from [bulk scans](#) and as a result of the enforcement of [ControlPoint Policies](#).

Before you can report sensitive document activity:

- Auditing must be enabled for each list or library for which you want to report sensitive document activity. You can enable these settings for individual site collections from within SharePoint or, for a larger scope, using the [ControlPoint Manage Audit Settings action](#).
- At least one Compliance scan must have been returned by Sensitive Content Manager with items that have been assigned a [Severity Level](#).

To report sensitive document activity:

- 1 [Select the object\(s\) for which you want to report sensitive document activity.](#)
- 2 Choose **Compliance > Sensitive Document Activity**.

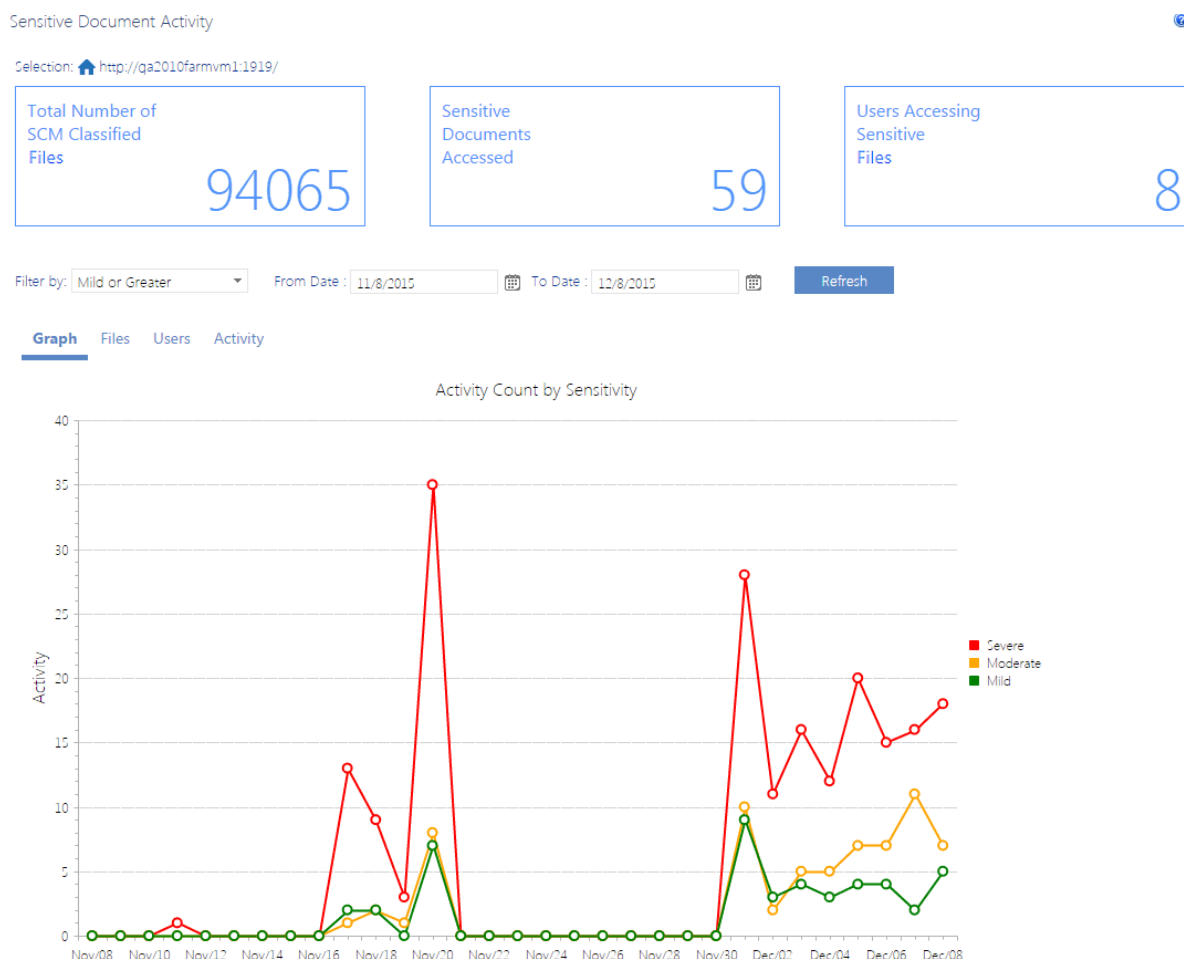

The tiles at the top of the report highlight the following statistics for the selected time period (by default, the past month):

- **Total Number of SCM (Sensitive Content Manager) Classified Documents**
- **Sensitive Documents Accessed** (that is, the *number of times* a document identified as having sensitive content has been accessed by a SharePoint user)

NOTE: The number of times the System Account has modified the Scan Results field for the item on the SharePoint list will be included in this value unless the [Sensitive Content Manager Configuration Setting Add Scan Results Column to Scanned SharePoint List](#) is set to false. Details can be found in the *ControlPoint Administration Guide*.

- **Users Accessing Sensitive Documents** (that is, the *number of unique SharePoint users* who have accessed documents identified as containing sensitive content)
- **Realtime Scanning** (that is, the number of days since the last [bulk scan](#) was performed)

To filter results that display in the body of the report:

1. Choose a different severity level from the **Filter** drop-down and/or modify the default date range.

Filter by: **Severe Only** From Date: 11/7/2015 To Date: 12/7/2015 Refresh

Graph Activity


Severe Only
Mild or Greater
Moderate or Severe
Severe Only

2. Click **[Refresh]**.

Graph Tab

The Sensitive Document Activity report **Graph** tab illustrates the Activity Count by Sensitivity for the selected Severity Level(s) and date range.

Note that you can click a Severity Level in the legend at the right side of the page to hide/display it.

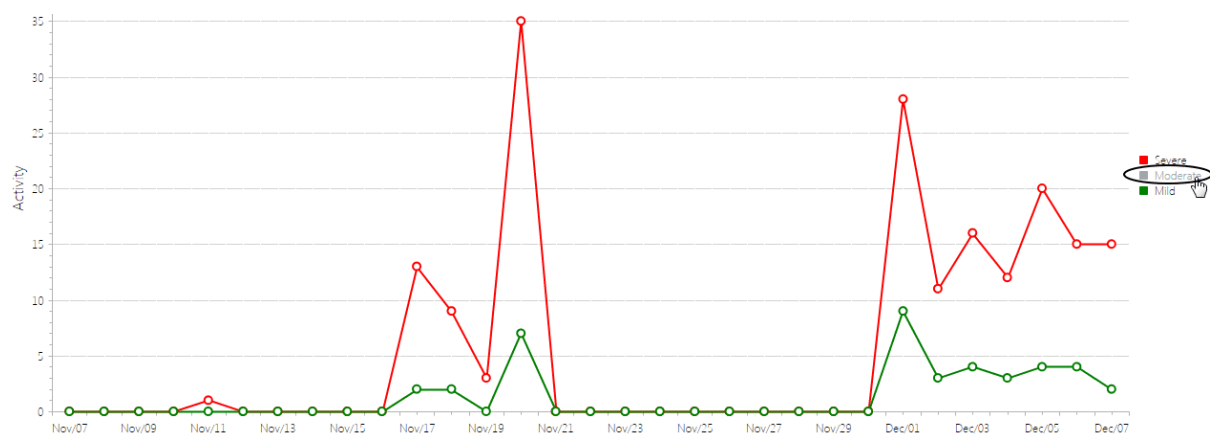

Files Tab

The Sensitive Document Activity report **Files** tab lists all of the documents the Content Sensitive Manager identified as "sensitive content" for the selected Severity Level(s), grouped by list or library.

Note that this tab displays all content sensitive classified documents for the selected Severity Level(s), regardless of whether they have been accessed, and the date range filter does not apply.

Filter by: **Severe Only** From Date: 11/7/2015 To Date: 12/7/2015 Refresh PDF Format Export

Graph **Files** Users Activity

Name	URL	Profile	Scan Date	Severity Level
List: http://qa2010farmvm1/sites/bettysc/Shared Documents/				
ControlPoint Known Issues.doc	http://qa2010farmvm1/sites/bettysc/Shared Documents/ControlPoint Known Issues.doc	Default Profile	12/4/2015 4:50:25 PM	Severe
List: http://qa2010farmvm1/sites/Sowjanya/fromvm2/testgb/Lists/Announcements/				
Get Started with Windows SharePoint Services!	http://qa2010farmvm1/sites/Sowjanya/fromvm2/tx	Default Profile	10/13/2015 1:05:57 PM	Severe
Get Started with Windows SharePoint Services! v.2	http://qa2010farmvm1/sites/Sowjanya/fromvm2/tx	Default Profile	10/13/2015 4:19:44 PM	Severe
PinPoint is Available now!	http://qa2010farmvm1/sites/Sowjanya/fromvm2/tx	Default Profile	10/13/2015 4:42:18 PM	Severe
ControlPoint v. 4.1 is the best yet!	http://qa2010farmvm1/sites/Sowjanya/fromvm2/tx	Default Profile	10/13/2015 5:00:55 PM	Severe
List: http://qa2010farmvm1/sites/Sowjanya/fromvm2/Lists/Calendar/				
Christmas Day	http://qa2010farmvm1/sites/Sowjanya/fromvm2/Li	Default Profile	10/13/2015 12:21:46 PM	Severe
Board meeting	http://qa2010farmvm1/sites/Sowjanya/fromvm2/Li	Default Profile	10/13/2015 6:09:09 PM	Severe
List: http://qa2010farmvm1/sites/Sowjanya/fromvm2/Lists/Announcements/				
Get Started with Microsoft SharePoint Foundation!	http://qa2010farmvm1/sites/Sowjanya/fromvm2/Li	Default Profile	10/13/2015 5:18:22 PM	Severe
List: http://qa2010farmvm1/sites/Sowjanya/fromvm2/testgb/Lists/Tasks/				
Fun with Attachments	http://qa2010farmvm1/sites/Sowjanya/fromvm2/tx	Default Profile	10/13/2015 5:11:57 PM	Severe
List: http://qa2010farmvm1/sites/bettysc/Lists/Announcements/				
Get Started with Microsoft SharePoint Foundation!	http://qa2010farmvm1/sites/bettysc/Lists/Announ	Default Profile	10/13/2015 4:56:14 PM	Severe

Page size: 10 67828 items in 6783 pages

Users Tab

The Users tab lists the SharePoint users who have accessed documents with sensitive content within the specified time period, along with the **Number of Docs Accessed**.

Activity Tab

The Activity tab lists each individual instance of sensitive content activity, including the **User Name**, **Activity Type**, document **Severity Level** and **Activity Date**.

Using ControlPoint Sentinel to Detect Anomalous Activity

ControlPoint Sentinel functionality enables you to detect deviations in document views and downloads from individual users' "typical" daily usage patterns. ControlPoint Sentinel uses the following components in its anomalous activity determinations:

- [Business Hours](#): Daily start and end time for each day of the work week.
- The following [Anomalous Activity Limits](#):
 - **Default daily activity limits**: The limits for each (measured in terms of document views and downloads) to apply to any user whose personal activity limits have not yet been characterized.
 - **Personal daily activity limits**: The deviation from "typical" daily usage patterns characterized for each individual user on a given day of the week.

ControlPoint Sentinel relies on SharePoint Audit Log events. Therefore, for this functionality to be effective, the auditing of Delete, Edit, and View/Download must be enabled for every site collection for which you want to collect activity data.

NOTE: Before ControlPoint Sentinel can be used, the ControlPoint Application Administrator must prepare the environment. Refer to the *ControlPoint Administration Guide* for details.

How Personal Daily Activity is Determined

Anomalous activity limits are set based on the statistical analysis of how often each user views and downloads documents. The personal daily activity limits used by ControlPoint Sentinel are defined in terms of standard deviations above the mean or average observed over a period of time (currently, 12 days worth of observations for each day of the week).

Standard deviation is a statistical measure of the variation within a set of data values. Two users may have the same average of document views and downloads per day, but their standard deviation or the variation in the number of documents they view and download in any given day can be very different. If a user consistently views and downloads roughly the same number of documents every day, then their standard deviation will be low. If a user is more erratic in the number of documents they view or download in a day (for example, sometimes viewing or downloading no documents, sometimes one or two, sometimes 30 or 40) then their standard deviation will be high. By using an individual user's standard deviation to define the limits for anomalous activity the limits are tailored to each user's usage pattern.

Using the user's standard deviation we can determine how likely it is that a user would view or download a particular number of documents in a day. When looking for anomalous activity we are looking at activity that is not very likely, that should happen much less than 1% of the time. For highly

anomalous activity we are looking for activity that should happen a very small fraction of a percentage of the time.

Defining Business Hours for Anomalous Activity Detection

The first step in Sentinel Setup is to define Business Hours, so that Anomalous Activity Limits can be defined differently for both business and non-business hours. For example, you may want to specify a lower limit for non-business hours, when typical activity is *expected* to be lower.

Note that Business Hours reflect the local time of the server on which SharePoint is installed.

To define business and non-business hours for anomalous activity detection:

- 1 From the Manage ControlPoint tree choose **ControlPoint Sentinel > Sentinel Setup**.
- 2 On the Sentinel Setup page, make sure the Business Hours tab is selected.












Anomalous Activity Setup

Business Hours

Base Line Rules

Anomalous Activity Rules

Business Hours

Monday	8:00 AM		To	5:00 PM		<input checked="" type="checkbox"/> Work Day
Tuesday	8:00 AM		To	5:00 PM		<input checked="" type="checkbox"/> Work Day
Wednesday	8:00 AM		To	5:00 PM		<input checked="" type="checkbox"/> Work Day
Thursday	8:00 AM		To	5:00 PM		<input checked="" type="checkbox"/> Work Day
Friday	8:00 AM		To	5:00 PM		<input checked="" type="checkbox"/> Work Day
Saturday	8:00 AM		To	5:00 PM		<input checked="" type="checkbox"/> Work Day
Sunday	8:00 AM		To	5:00 PM		<input checked="" type="checkbox"/> Work Day

Save Setup

- 3 For each day that you want activity data to be collected, select the start and end time that represent the standard work hours for that particular day, and make sure the **Work Day** box is checked.

Business Hours

Monday	8:00 AM	To	6:00 PM	<input checked="" type="checkbox"/> Work Day
Tuesday	8:00 AM	To	12:00 AM	12:30 AM
Wednesday	8:00 AM	To	2:00 AM	2:30 AM
Thursday	8:00 AM	To	4:00 AM	4:30 AM
Friday	8:00 AM	To	6:00 AM	6:30 AM
Saturday	8:00 AM	To	8:00 AM	8:30 AM
Sunday	8:00 AM	To	10:00 AM	10:30 AM

- For each non-work day, uncheck the **Work Day** box.

Saturday	12:00 AM	To	12:00 AM	<input type="checkbox"/> Work Day
Sunday	12:00 AM	To	12:00 AM	<input type="checkbox"/> Work Day

NOTE: When the **Work Day** box is unchecked, activity data will not be collected for that day. Start and end times are irrelevant and will be cleared when you save the setup.

- When you have finished defining business and non-business hours, click **[Save Setup]**.

Defining Anomalous Activity Limits

You can define two types of anomalous activity limits:

- Default daily activities, which are used for all users until personal user limits have been characterized.
- Personal daily activities, which are used as soon as a user's personal activity limits have been characterized.

NOTE: For each day of the week, personal user limits replace default daily limits after 12 days worth of observations by the Anomalous Activity Detection Job.

To access the Anomalous Activity Limits page:

From the Sentinel Setup page, select the **Anomalous Activity Limits** tab.

Defining Default Daily Activity Limits

Default Daily Activity Limits are expressed in terms of the number of "typical" views and downloads. Because they apply to *all* users until personal user limits have been characterized, it is recommended that you enter limits that would be considered typical and anomalous for *any* SharePoint user in your organization. For example, 100 document views and downloads per day may take into account

"typical" daily activity for your most active users without being an alarmingly high number for less active users. Double that number may be considered moderately anomalous, while triple that number may be considered highly anomalous.

Default daily activity limits:

The default daily activity limits used for all users until personal user limits have been characterized.

Typical daily activity limit: Document views and downloads
Moderately anomalous activity limit: Document views and downloads
Highly anomalous activity limit: Document views and downloads

NOTE: If you do not want ControlPoint Sentinel to track Default Daily Activity Limits, leave the limit fields set to 0.

Defining Personal Daily Activity Limits

The following table shows the percentage of values that fall around or above the mean in terms of the standard deviation.

Standard Deviations (σ) Above the Mean	Percentage (%) of Values Above the Standard Deviations from the Mean
1s	15.86553%
2s	2.275013%
3s	0.13499%
4s	0.003167%
5s	0.000028665%
6s	0.00000009865%
7s	0.000000000128%

It is recommended that you:

- Set the **Typical daily activity limit** to **3** standard deviations above the mean.
A user could exceed this limit once every two years. This is not cause for concern but if it happens more frequently than that it may warrant investigation.
- Set the **Moderately anomalous activity limit** to **5** standard deviations above the mean.
A user could exceed this limit once in about 10,000 years. This is an indication of anomalous activity that should be investigated immediately.
- Set the **Highly anomalous activity limit** to **7** standard deviations above the mean.

This level of activity is very very unlikely and should be acted upon immediately.

Personal daily activity limits:

The personal daily activity limits are based on the historical analysis of each user's typical activity. The personal limits will be used once enough information has been gathered about a user's typical usage.

Limits are defined as number of standard deviations above the average daily document views and downloads for a given user.

Typical daily activity limit: Standard deviations
Moderately anomalous activity limit: Standard deviations
Highly anomalous activity limit: Standard deviations

See also [How Personal Daily Activity is Determined](#).

Defining Anomalous Activity Rules

After you have defined Business Hours and Activity Limits, the next step is to define Anomalous Activity Rules, or the action (if any) to take when a defined activity limit is exceeded, during both business hours and non-business hours.

To define Anomalous Activity Rules:

1. From the Sentinel Setup page, select the **Anomalous Activity Rules** tab.

Business Hours Corrective Actions

Default daily activity limits:

When a user's daily activity	Action	Email
Exceeds typical daily activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>
Exceeds moderate anomalous activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>
Exceeds highly anomalous activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>

Personal daily activity limits:

When a user's daily activity	Action	Email
Exceeds typical daily activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>
Exceeds moderate anomalous activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>
Exceeds highly anomalous activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>

Non Business Hours Corrective Actions

Daily activity limits:

When a user's daily activity	Action	Email
Exceeds typical daily activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>
Exceeds moderate anomalous activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>
Exceeds highly anomalous activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>

Personal daily activity limits:

When a user's daily activity	Action	Email
Exceeds typical daily activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>
Exceeds moderate anomalous activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>
Exceeds highly anomalous activity limit	<input type="text" value="No Action Required"/>	<input type="text"/>

- 2 If you want to have an alert generated whenever a limit is exceeded for a particular combination of criteria (Business Hours/Non-Business Hours; Default Daily Activity/Personal Activity; Activity Limit):

- Select **Alert** from the Action drop-down.
- If you want to have an email generated when the limit is exceeded, enter an **Email address**. (You can enter multiple email addresses, separated by commas (,)).

NOTE: Only limits to which an Alert is applied will be subject to [Sentinel reporting](#). Limits with No Action Required will not be reported.


Reporting Anomalous Activity

The ControlPoint Sentinel Report lets you view anomalous activity events for which an Alert has been specified on the [Sentinel Setup - Anomalous Activity Rules page](#). You can also filter results by user and/or date range.

To report anomalous activity:

- 1 From the Manage ControlPoint tree choose **ControlPoint Sentinel > Sentinel Report**.
- 2 If you want to narrow your results, enter one or more user(s) in the People Picker and/or enter a date range.

NOTE: If you leave the **From** and **To** Dates blank, all available results will be returned.

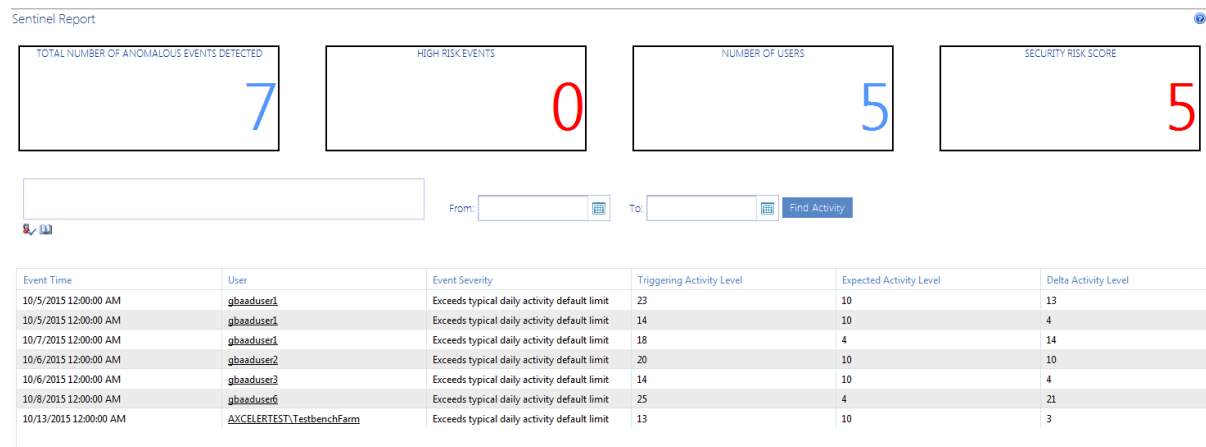

The tiles at the top of the report highlight the following statistics:

- The **Total Number of Anomalous Activities Detected**
- The number of **High Risk Events** as characterized by ControlPoint Sentinel
- The **Number of Users** with anomalous activity
- The **Security Risk Score** (which is derived by the Severity of each activity within the date range covered by the report)

For each anomalous event detected, report detail displays:

- the **Event Time** (that is, the date and the time when the ControlPoint Anomalous Activity Detection Job captured the event)
- the **User** whose activity triggered the anomalous activity detection alert
- the **Event Severity** (as defined on the [Sentinel Setup - Anomalous Activity Limits page](#))
- the **Triggering Activity Level** that resulted in the anomalous activity detection alert:
 - for **Default** daily activity, activity above the specified limit for the Event Severity
 - for **Personal** daily activity, the amount of activity for the Event Severity to which the specified deviations above from the user's "typical" usage pattern have been applied.
- the **Expected Activity Level**:
 - for **Default** daily activity, the specified limit for the Event Severity
 - for **Personal** daily activity, "typical" usage pattern as calculated by ControlPoint Sentinel
- the **Delta Activity Level** (that is, the difference between Triggering Activity Level and the Expected Activity Level).

To view detailed audit log data for a user:

Click the User link to generate a [ControlPoint Audit Log analysis](#).

Provisioning SharePoint Site Collections and Sites

ControlPoint Site Provisioning functionality automates the management of end user requests for new site collections and sites, which are based on "Provisioning Profiles" that you define. You can use ControlPoint's built-in functionality to associate specific site collection-, site-, and list-level properties with a particular Profile, and enforce their usage within the site collections or sites that use it. You can even attach one or more [ControlPoint Governance Policies](#) to a Profile.

NOTE: This feature is not available for Non-Standard installations.

Managing Site Provisioning Profiles

Before an end user can request a new site collection or site, at least one Provisioning Profile must have been created. Once created, the Provisioning Profile becomes available to end users when a request for a new site collection or site is initiated.

Metalogix
ControlPoint

REQUEST SITE OR SITE COLLECTION

CHOOSE ONE PRE-APPROVED PROFILE TO CREATE YOUR SITE OR SITE COLLECTION FROM

SELECT SITE PROFILE

[Team Site](#)


[Product Site](#)

SELECT SITE COLLECTION PROFILE

[Collaboration Blog](#)


To launch the ControlPoint Provisioning Profile Manager:

From the Manager ControlPoint panel, choose **Governance Policy Manager and Provisioning > Provisioning Profile Manager**.

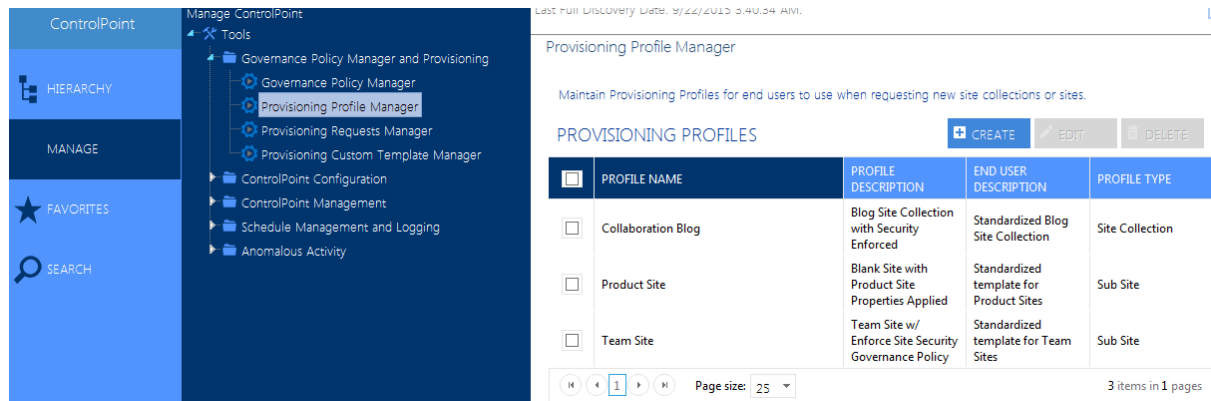

To create a Provisioning Profile:

- 1 From the Provisioning Profile Manager main page, choose **[Create]**.
- 2 Complete the fields on the Build New Provision Profile page as follows:
 - Enter the **Profile Name** as you want it to display in the Provisioning Profile Manager list.
 - Enter the **End User Description** as you want it to display in the Request a Site or Site Collection page.
 - Enter the **Profile Description** as you want it to display in the Provisioning Profile Manager list.
 - Select a **Profile Type** (Site Collection or Sub Site)
 - Select a **Base SharePoint Template**.

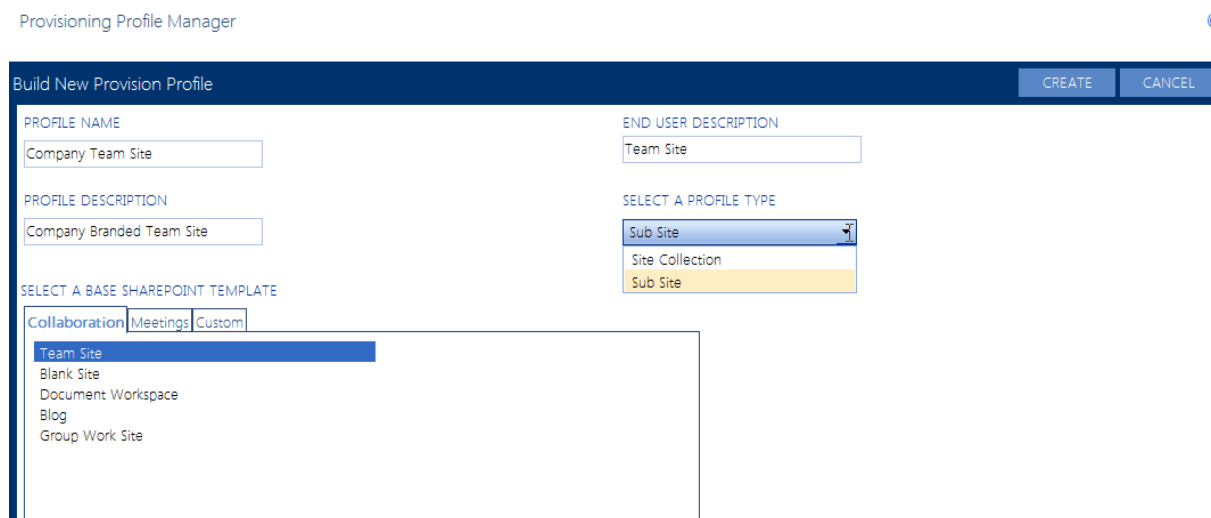


NOTE: If you want to be able to select a template based on a site definition (such as a Publishing site or a custom site definition that has been deployed to the farm), the feature for that site definition must be activated on the ControlPoint Configuration Site collection.

3 If you want to **Attach Additional Profile Settings**, you can

- Click the appropriate link—**Set Site Collection Properties** (if available), **Set Site Properties**, or **Set List Properties**—and complete the applicable window.

NOTE: If you select **Enforce Policy** and [schedule the operation to run on a recurring basis](#), it will be enforced for any site collection or site created using that Profile.

- If you want to attach one or more *existing* ControlPoint Governance Policies to the Provisioning Profile, select from the available **Governance Policies**

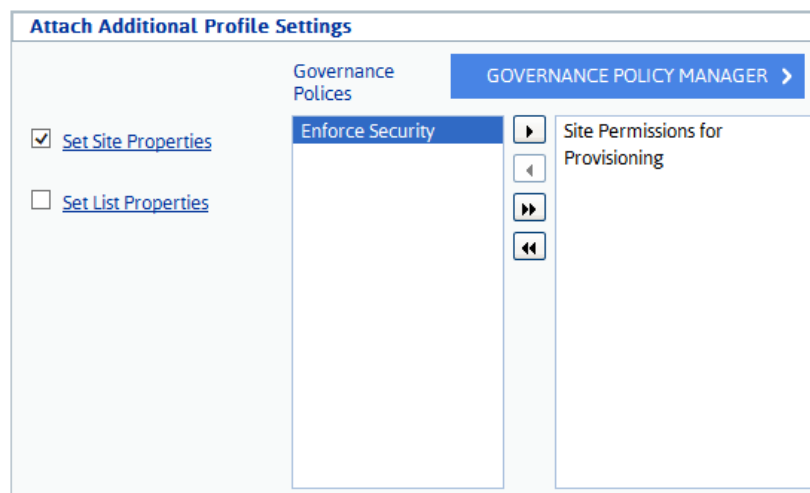

NOTE: If the Governance Policy that you want to attach to the Profile does not appear in the list, click **[Governance Policy Manager]**, and [create a new Governance Policy](#). When you return to the Build New Provision Profile page, click **[Create]**, then edit the Profile see the new Governance Policy in the list.

NOTE: To access instructions for completing the applicable ControlPoint operation, click the Help icon (?) at the top right corner of the window or refer to the relevant section of the ControlPoint User Guide.

4 Click **[Create]**.

To edit a Provisioning Profile:

- From the Provisioning Profile Manager main page, check the box to the left of the Profile that you want to edit.
- Click **[Edit]**.
- Edit the fields on the Edit Provision Profile page as appropriate.
- Click **[Update]**.

To delete one or more Provisioning Profiles:

- 1 From the Provisioning Profile Manager main page, check the box to the left of the Profile(s) that you want to delete.
- 2 Click **[Delete]**

You will be prompted to confirm your action before continuing.


Using Custom Templates for Site Provisioning Profiles

You can create custom templates by selecting an existing site collection or site, saving it as a template (.wsp file) and attaching the wsp to the ControlPoint Custom Site Templates list.

If you want to create a template from a site that uses a site definition (such as a custom site definition that has been deployed to the farm), that site definition feature must be activated on the ControlPoint Configuration Site collection.

To create a custom template for site provisioning profiles:

- 1 Navigate to the Site Settings page of the site you want to save as a custom template, then click **Save site as Template**.

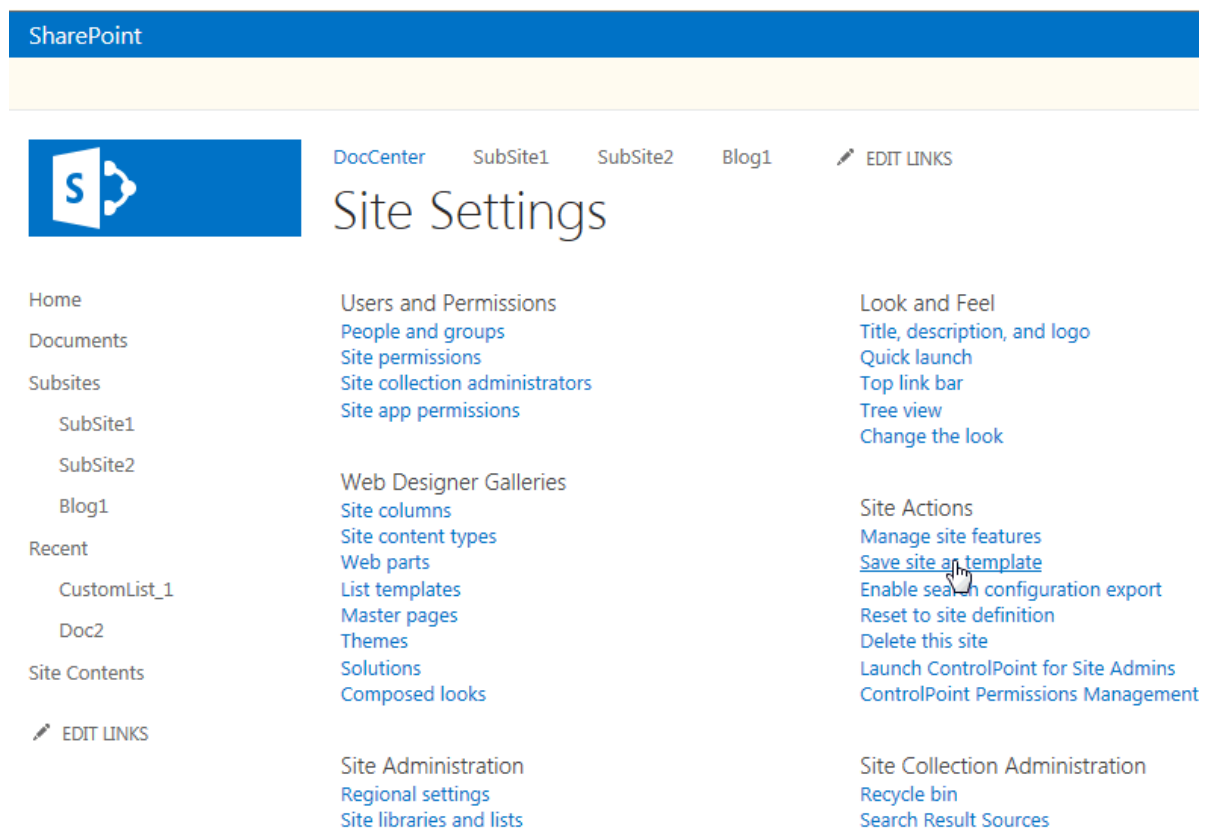

- 2 Complete the Save as Template form, including whether you want to **Include Content**, then click **[OK]**.

DocCenter **SubSite1** **SubSite2** **Blog1** **EDIT LINKS**

Site Settings > Save as Template ⓘ

Home

Documents

Subsites

- SubSite1
- SubSite2
- Blog1

Recent

- CustomList_1
- Doc2

Site Contents

EDIT LINKS

File Name

Enter the name for this template file.

File name:

Name and Description

The name and description of this template will be displayed on the Web site template picker page when users create new Web sites.

Template name:

Template description:

Include Content

Include content in your template if you want new Web sites created from this template to include

☐ Include Content

- 3 Open the site's Solution Gallery.
- 4 Select the template you just created and save it to the location of your choice.
- 5 From the Manage ControlPoint tree, choose **Governance Policy Manager and Provisioning > Provisioning Custom Template Manager**.

Manage ControlPoint

- Tools
 - Governance Policy Manager and Provisioning
 - Governance Policy Manager
 - Provisioning Profile Manager
 - Provisioning Requests Manager
 - Provisioning Custom Template Manager**
 - ControlPoint Configuration
 - ControlPoint Configuration Site

Provisioning Custom Template Manager


Add Site **Delete** **Content**

<input type="checkbox"/>	Site Name	Site Url	Include Content	Experience
<input type="checkbox"/>	Company Blog	http://clients/sites/blog		2010
<input type="checkbox"/>	Help Desk	http://2010foundation:40042/sites/Help		2010

Page size: 25 2 items in 1 pages

- 6 Click **[Add Site]**.

- 7 From the Destination Farm Tree, select the site collection or site from which you created the .wsp file.

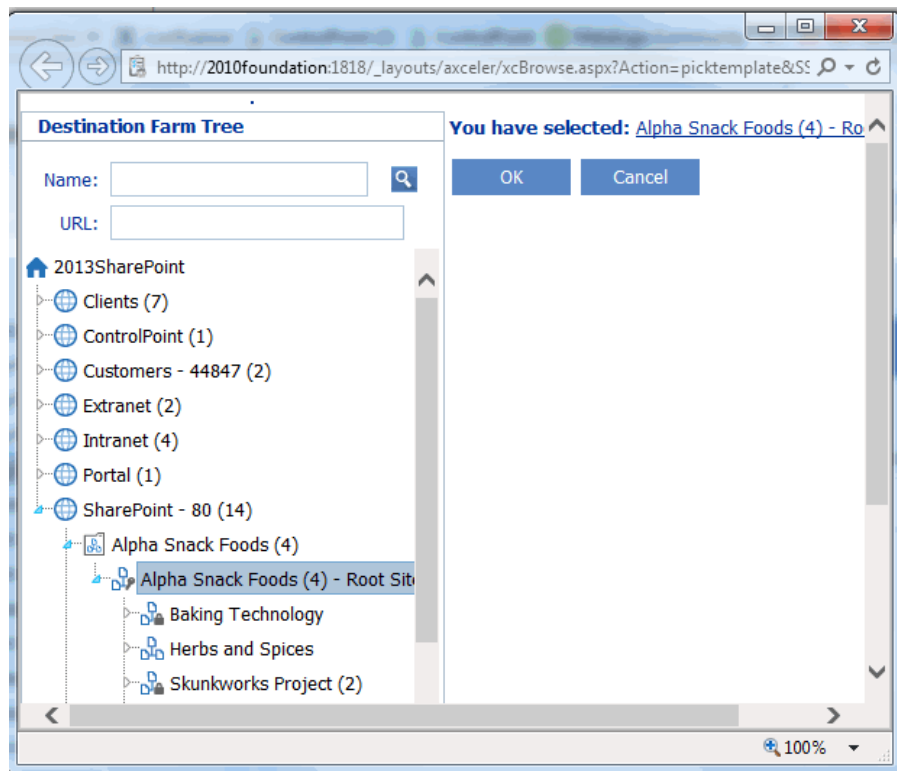

- 8 Click **[OK]** to return to the Provisioning Custom Template Manager grid.
- 9 Check the box to the left of the site collection/site, then click **[Attach]**.

Provisioning Custom Template Manager

<div> + Add Site 🗑 Delete + Attach </div>				
<input type="checkbox"/>	Site Name	Site Url	Attachment File	Experience
<input checked="" type="checkbox"/>	Alpha Snack Foods	http://2010foundation/sites/alpha		2010
<input type="checkbox"/>	Company Blog	http://clients/sites/blog		2010
<input type="checkbox"/>	Help Desk	http://2010foundation:40042/sites/Help		2010

⏪
⏩
1
Page size: 25
3 items in 1 pages

- 10 Click **[Browse]** and select the .wsp file associated with the site.
- 11 Click **[Upload]**.

The custom template will now be available for provisioning requests.

Provisioning Custom Template Manager				
<div><div>+ Add Site</div><div>🗑 Delete</div><div>+ Attach</div></div>				
<input type="checkbox"/>	Site Name	Site Url	Attachment File	Experienc
<input type="checkbox"/>	Alpha Snack Foods	http://2010foundation/sites/alpha	Product_sites.wsp	2010
<input type="checkbox"/>	Company Blog	http://clients/sites/blog		2010
<input type="checkbox"/>	Help Desk	http://2010foundation:40042/sites/Help		2010
<div><div>1</div><div>Page size: 25</div><div>3 items in 1 pages</div></div>				

Making Provisioning Profiles Available to End Users

After at least one Provisioning Profile has been created, the next step is to activate the ControlPoint Site Provisioning feature so that end users can submit requests for new site collections and sites. This feature adds a new item—Request a New Site Collection or Site—to the SharePoint Site Actions menu.

The ControlPoint Site Provisioning feature can be activated for some or all sites in the farm via the [ControlPoint Manage Site Features action](#).


NOTE: Because it is a hidden feature, it cannot be activated via the SharePoint user interface.

To activate the ControlPoint Site Provisioning Feature:

- 1 From the SharePoint Hierarchy, [select the object\(s\) for which you want to make the ControlPoint Site Provisioning Feature available](#).

NOTE: Include in the scope of your selection the sites from which you want Request Forms to be *accessible*, not necessarily where the new site collection/site will actually be *created*.

2 Choose **Configuration > Manage Site Features**.

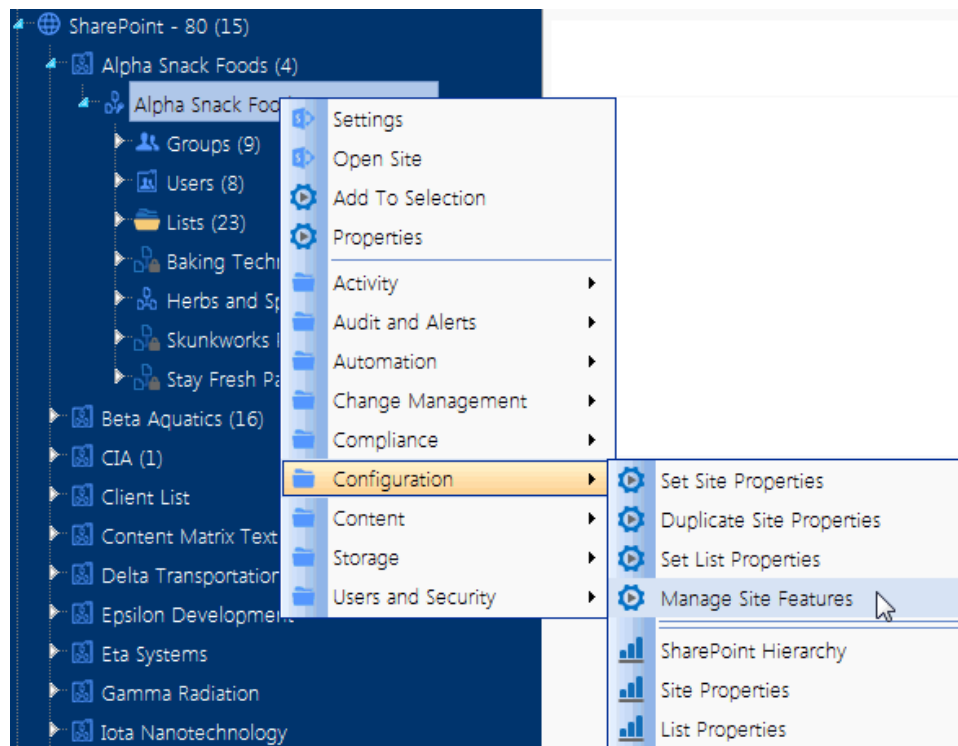

3 Select **Activate Selected** and click the **Show Hidden** box.

4 Click the **Name** header to sort the list of features alphabetically.

Manage Site Features > Select parameter(s) to act on ⓘ

☒ Activate Selected ☐ Deactivate Selected

☒ Show Hidden ☐ Force activation/deactivation

Name	Description	Hidden
XML Form Libraries	Provides support for XML form libraries for a site.	✓

5 Select ControlPoint Site Provisioning.

Manage Site Features > Select parameter(s) to act on 

☒ Activate Selected ☐ Deactivate Selected


☒ Show Hidden ☐ Force activation/deactivation

Name ^	Description	Hidden
\$Resources:core, GbwFeature	\$Resources:core, GbwFeatureWhereaboutsDescription;	✓
Announcements Lists	Provides support for announcements lists for a site.	✓
Central Administration Links	Links for the Operations and Application Management pages in the Central Administration site.	✓
Circulation List	This feature provides support for Circulation list types.	✓
Contacts Lists	Provides support for contacts lists for a site.	✓
ControlPoint for Site Admins, customizable	This feature adds a link to a customizable ControlPoint screen for Site Administrators onto the Site Settings page and the Site Actions menu	✓
ControlPoint Menus for Site Settings	This feature installs a number of ControlPoint menus onto the Site Settings page	✓
ControlPoint Permissions Management for Site Admins	This feature adds a link to a customizable ControlPoint Permissions Management screen for Site Administrators onto the Site Settings page and the Site Actions menu	✓
ControlPoint Site Provisioning	Creates a link to the site provisioning page on the current web site.	✓
Custom Lists	Provides support for custom lists for a site.	✓
Data Source Libraries	Provides support for data source libraries for a site.	✓
Discussion Lists	Provides support for discussion boards for a site.	✓
Document Libraries	Provides support for document libraries for a site.	✓
Events Lists	Provides support for events lists for a site.	✓


6 Click [Run Now].

How New Sites and Site Collections Are Requested

An end user can request a new site or site collection from the SharePoint Site Actions menu as long as the ControlPoint Site Provisioning feature has been activated for that site.

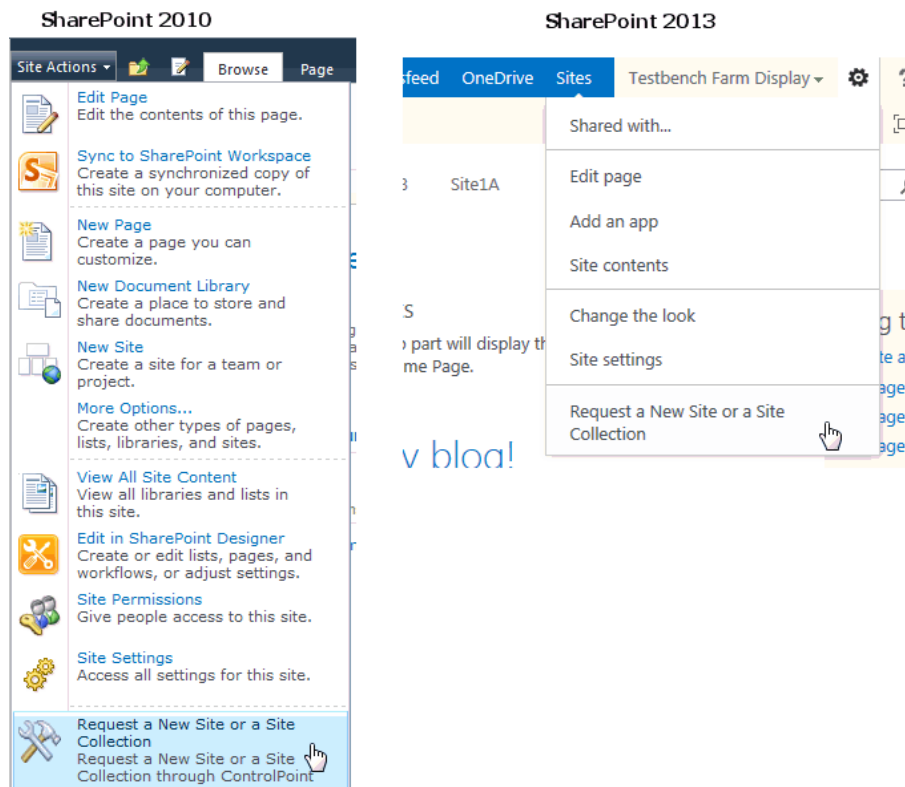

When the user chooses **Request a New Site Collection or Site**, the Request Site or Site Collection page is launched, and the user can select from the available Profiles that were created via the ControlPoint Provisioning Profile Manager.

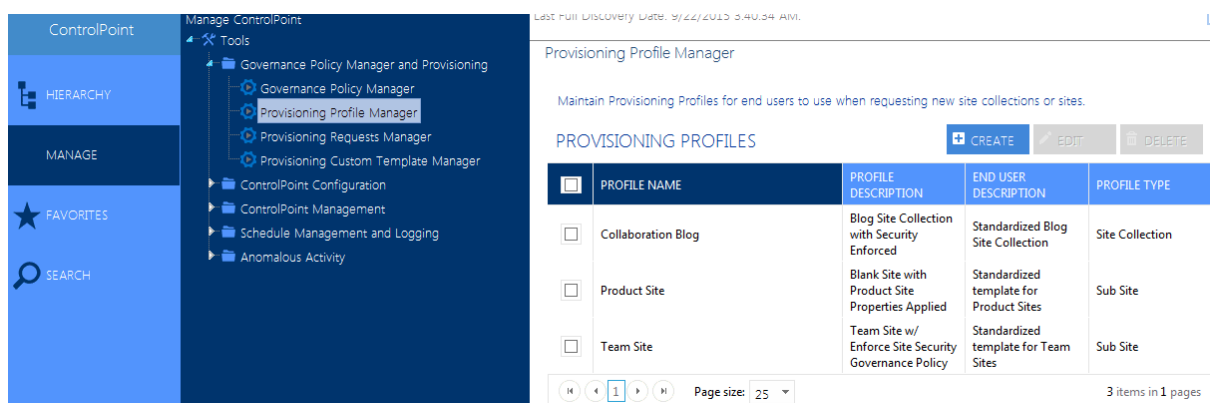

Upon selecting a Profile, the Create Site (or Site Collection) page displays, prompting the requester for the following information:

- a **Title** and **Description** for the new site

- the **Web Site Address** that the requester wants to use for the new site

NOTE: The requester must enter a *full* URL, including the name of the new site. For example, if the requester wants to create a subsite called Employee Contact Information under myportal/sites/hr, a valid URL might be **http://myportal/sites/hr/employeecontacts**

The **Requester Name** and **Requester Email address** pre-populate with the login name and email address of the current user. The Requester Email Address can, however be changed. If the request is for a Site *Collection*, **Primary Site Collection Administrator** and **Primary Site Collection Email Address** fields are pre-populated with the current user's information, but they can also be changed.

- When the requester places the request, ControlPoint validates the information provided by the requester, including that the URL is valid and available. If the validation fails, any error messages display at the top of the form.

Create Site Request Form

Error: Site http://myportal/sites/hr already exists. You can also contact your ControlPoint Administrator for further details.

new site. The title will be displayed on each page in the site. or your new site.	<input style="width: 95%;" type="text" value="Human Resources"/> <div style="border: 1px solid #ccc; padding: 5px; min-height: 100px;">Human Resources Site</div>
:SS want to use, including the new site name	<input style="width: 95%;" type="text" value="http://myportal/sites/hr"/>
ME	AXCELERTEST\testbenchfarm
MAIL ADDRESS	<input style="width: 95%;" type="text" value="TestRanchFarm@axcelertest.local"/>

If the validation is successful, a confirmation number is generated and displays at the top of the form, and a confirmation email is automatically sent to the requester.

Metalogix ControlPoint **Create Site Request Form**

Your provisioning request was successfully placed. Please use the key dd1486ad-5875-4e92-93e6-b0d703ac187a for further correspondence. Please also check your inbox for the confirmation of your request

NOTE: Once a request is submitted, it is registered in the Site Creation Requests list on the ControlPoint Configuration Site.

Managing Site Provisioning Requests

From the Manage Site Provisioning Requests page, you can:

- monitor incoming requests for site collections and sites
- approve or reject the requests, and
- edit request details, such as title, description or url.


As an alternative to manually approving or rejecting requests, you can use a SharePoint workflow to handle the approval process. For details, refer to the topic "Configuring the Site Provisioning Workflow Settings" in the *ControlPoint Administration Guide*.

To launch the Provisioning Requests Manager:

From the Manage ControlPoint tree, choose **Governance Policy Manager and Provisioning > Provisioning Requests Manager**.

TITLE	URL	DESCRIPTION	REQUESTOR NAME	REQUEST STATUS	UNIQUE KEY	PROFILE TYPE	CREATED ON
Human Resources	http://mypo	Human Resources Site	AXCELERTES	Requested	dd1486ad-5875-4e92-93e6-b0d703ac187	Site	8/18/2014 6:11:28 PM
&Rest	http://qa201	Rest	AXCELERTES	Requested	9708a7d7-8952-4ee5-90f9-0fc41642fa1e	Site	8/18/2014 4:17:56 PM
>Home	http://qa201	home	AXCELERTES	Error	423a85a8-558b-4831-8953-05cefe87e11	Site Collection	8/18/2014 3:36:12 PM
JFish	http://qa201	fishing	AXCELERTES	Requested	f68b5c00-b99c-4386-b3df-de2179e5a8c	Site Collection	8/18/2014 3:34:51 PM
7RT	http://qa201	7RTYUIh	AXCELERTES	Processing	f8e9e97-6869-4792-bab5-	Site Collection	8/18/2014 3:33:29 PM

Note that you can filter your view based on the state of the request:

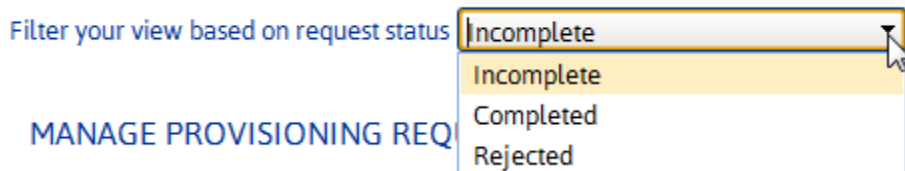

- The **Incomplete** view, includes requests with a status of:
 - Requested
 - Approved
 - In Process
 - Error
- The **Completed** view shows all requests which have been processed and for which site collections/sites have been created and all of the Additional Profile Settings (properties and Governance Policies) been applied.
- The **Rejected** view shows all Rejected requests.

If the approval process uses a workflow:

The grid displays an additional column, **Workflow Status**, so that you can monitor the progress of workflow instances. You can also view/update a workflow in SharePoint. (For example, if the Workflow Status is Failed on Start, you may want to start it manually.)

To view/update a workflow instance, check the box to the left of the applicable request, then click **[Workflow]**.

To edit/view details of a Provisioning Profile:

- 1 In the Manage Provision Requests grid, check the box to the left of the request that you want to view/edit.
- 2 Click **[Edit]**.

Note that you can edit the **Title**, **Description**, and **URL** of the request. You can also approve or reject the request by changing the **Request Status**.

If a request is **Rejected**, an email is automatically sent to the requester. If a request is **Approved**, it automatically starts Processing and is **Completed** when the site collection or site is created. Once the site or site collection is created, an email is automatically sent to the requester.

Note that you can edit the **Title**, **Description**, and **URL** of the request. You can also approve or reject the request by changing the **Request Status**.

If a request is **Rejected**, an email is automatically sent to the requester. If a request is **Approved**, it automatically starts Processing and is Completed when the site collection or site is created and all of the Additional Profile Settings (properties and Governance Policies) been applied per the new site collection or site. Once the site or site collection is created, an email is automatically sent to the requester.

NOTE: Additional Profile Settings are applied the next time the scheduled job that has been defined for the operation has run.

Form fields and values:

- TITLE: Tree Huggin' Goodness
- DESCRIPTION: Tree Huggin' Goodness
- URL: http://qa2013foundatio/sites/Products/treehug
- REQUEST STATUS: Requested (selected)
- REQUESTOR: axcelertest\jamesjoyce
- UNIQUE KEY: 652ae85b-27ba-4f7f-a373-dfb9d2faff76

- 1 Click **[Update]**.

To approve one or more requests without viewing or editing details:

- 1 From the Provisioning Request Manager main page, check the box to the left of each request you want to approve.
- 2 Click **[Approve]**.

To delete one or more requests:

- 1 From the Provisioning Requests Manager main page, check the box to the left of the request(s) that you want to delete.
- 2 Click **[Delete]**
You will be prompted to confirm your action before continuing.

Default Menu Options for ControlPoint Users

The following tables identify ControlPoint default menu items at all levels of the SharePoint Hierarchy as well as the Manage ControlPoint panel.

The following terms are used to describe menu item behavior in a **Multi-farm** installation:

- **Home Only** - The operation can be performed on the home farm only.
- **Home or Remote** - The operation can be performed on a single farm; either home or remote
- **Multiple** - The operation can be performed on multiple farms.
- **Farm-Independent** - The operation is not farm-specific.

Farm-Level Default Menu Items

Farm-Level Item	Type	Multi-Farm
Central Administration Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Advanced Search	Search	Home or Remote
SharePoint Summary Not available to members of the Business Administrators group.	Analysis	Home only
Refresh SharePoint Hierarchy	Action	Home or Remote
Properties	Action	Home or Remote
Run Saved Instructions Not available to members of the Business Administrators group.	Action	Home only
Farm Summary Dashboard Available for Standard installations.	Action	Home only

Farm-Level Item	Type	Multi-Farm
GDPR Dashboard	Action	Home only
Activity folder:		
Most/Least Activity	Analysis	Home only
Site Collection Activity Analysis	Analysis	Multiple
Site Activity Analysis	Analysis	Multiple
Trend Analysis for Activity	Analysis	Home only
Activity by Profile Property Available for SharePoint Server farms.	Analysis	Home only
Activity by User	Analysis	Multiple
Activity by Document	Analysis	Multiple
Checked Out Documents	Analysis	Multiple
Blog Post Activity	Analysis	Home only
Inactive Users	Analysis	Home only
Audit and Alerts folder:		
Manage Audit Settings	Action	Multiple
ControlPoint Alerts	Action	Home only
Create SharePoint Alerts	Action	Home only
Manage SharePoint Alerts	Action	Home only
Audit Log Analysis	Analysis	Multiple
Change Log Analysis	Analysis	Multiple
SharePoint Alerts by Site	Analysis	Multiple
SharePoint Alerts by User	Analysis	Multiple

Farm-Level Item	Type	Multi-Farm
Automation folder:		
Create ControlPoint Policy	Action	Home only
Manage ControlPoint Policies	Action	Home only
Governance Policy Manager Not available to members of the Business Administrators group.	Action	Home only
Set Metadata Value Not available for Foundation farms.	Action	Home only
Create Managed Metadata Not available for Foundation farms.	Action	Home only
Manage SharePoint Groups	Action	Home or Remote
ControlPoint Policies	Analysis	Home only
Change Management folder:		
Content Types	Analysis	Multiple
Web Parts by Part	Analysis	Multiple
Web Parts by Site	Analysis	Multiple
Workflow Analysis	Analysis	Multiple
Compliance folder: Available to members of the Compliance Administrators group.		
Analyze Content	Action	Home only
Compliance Summary	Analysis	Home only
Compliance Actions Audit	Analysis	Home only
Sensitive Content Activity	Analysis	Home only
Scanned files by Scope	Analysis	Home only

Farm-Level Item	Type	Multi-Farm
Scanned files by Search terms	Analysis	Home only
Configuration folder:		
Set Site Collection Properties	Action	Multiple
Set Site Properties	Action	Multiple
Set List Properties	Action	Multiple
Manage Site Collection Features	Action	Multiple
Manage Site Features	Action	Multiple
SharePoint Hierarchy	Analysis	Multiple
Site Collection Properties	Analysis	Home Only
Site Properties	Analysis	Home Only
List Properties	Analysis	Multiple
Content folder:		
Managed Metadata Usage Not available for Foundation farms.	Analysis	Multiple
Trend Analysis for Site Count	Analysis	Home only
Broken Links	Analysis	Multiple
Solution Summary Not available to members of the Business Administrators group.	Analysis	Multiple
Storage folder:		
Most/Least Storage	Analysis	Home Only
Site Collection Storage Analysis	Analysis	Multiple
Site Storage Analysis	Analysis	Multiple

Farm-Level Item	Type	Multi-Farm
Content Database Storage	Analysis	Multiple
Trend Analysis for Storage	Analysis	Home only
Duplicate Files	Analysis	Home only
Storage by File Type	Analysis	Home only
Recycle Bins	Analysis	Multiple
<i>Users and Security folder:</i>		
Set User Direct Permissions	Action	Multiple
Delete User Permissions	Action	Multiple
Duplicate User Permissions	Action	Multiple
Add User to SharePoint Group	Action	Home or Remote
Delete SharePoint Groups	Action	Home only
Backup Permissions	Action	Home only
Manage Permissions Backups	Action	Home only
Manage Permissions Inheritance	Action	Multiple
Orphaned Domain Users	Analysis	Multiple
Site Permission	Analysis	Multiple
Comprehensive Permissions	Analysis	Multiple
Comprehensive User Analysis	Analysis	Home only
SharePoint Group Analysis	Analysis	Multiple

Web Application-Level Default Menu Items

Web Application-Level Item	Type	Multi-Farm
Advanced Search	Search	Home or Remote
Add to Selection	Action	(Depends on operation)
Properties	Action	Home or Remote
Activity folder:		
Most/Least Activity	Analysis	Home Only
Site Collection Activity Analysis	Analysis	Multiple
Site Activity Analysis	Analysis	Multiple
Trend Analysis for Activity	Analysis	Home Only
Activity by Profile Property Not available for Foundation farms.	Analysis	Home Only
Activity by User	Analysis	Multiple
Activity by Document	Analysis	Multiple
Checked Out Documents	Analysis	Multiple
Inactive Users	Analysis	Multiple
Blog Post Activity	Analysis	Home Only
Social Activity Analysis	Analysis	Home Only
Audit and Alerts folder:		
Manage Audit Settings	Action	Multiple
ControlPoint Alerts	Action	Home Only
Create SharePoint Alerts	Action	Home Only
Manage SharePoint Alerts	Action	Home Only

Web Application-Level Item	Type	Multi-Farm
Audit Log Analysis	Analysis	Multiple
Change Log Analysis	Analysis	Multiple
SharePoint Alerts by Site	Analysis	Multiple
SharePoint Alerts by User	Analysis	Multiple
Automation folder:		
Create ControlPoint Policy	Action	Home Only
Manage ControlPoint Policies	Action	Home Only
Set Metadata Value Not available for Foundation farms.	Action	Home Only
Create Managed Metadata Not available for Foundation farms.	Action	Home Only
Manage SharePoint Groups	Action	Home or Remote
ControlPoint Policies	Analysis	Home Only
Change Management folder:		
Content Types	Analysis	Multiple
Web Parts by Part	Analysis	Multiple
Web Parts by Site	Analysis	Multiple
Workflow Analysis Not available to members of the Business Administrators group.	Analysis	Multiple
Compliance folder: Available to members of the Compliance Administrators group.		
Analyze Content	Action	Home Only
Compliance Summary	Analysis	Home Only

Web Application-Level Item	Type	Multi-Farm
Compliance Actions Audit	Analysis	Home Only
Sensitive Content Activity	Analysis	Home Only
Scanned files by Scope	Analysis	Home Only
Scanned files by Search terms	Action	Multiple
Configuration folder:		
Set Site Properties	Action	Multiple
Set List Properties	Action	Multiple
Manage Site Collection Features	Action	Multiple
Manage Site Features	Action	Multiple
Alternate Access Mappings Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Configure Document Conversions Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Define Managed Paths Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Delete Web Application Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Extend Web Application to Another IIS Website Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Information Management Policy Usage Reports Not available to members of the Business Administrators group.	SharePoint	Home or Remote

Web Application-Level Item	Type	Multi-Farm
Manage Content Databases Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Manage Web Application Features Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Remove SharePoint from IIS Web Site Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Web Application General Settings Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Web Application Outgoing E-Mail Settings Not available to members of the Business Administrators group.	SharePoint	Home or Remote
SharePoint Hierarchy	Analysis	Home Only
Site Collection Properties	Analysis	Home Only
Site Properties	Analysis	Multiple
List Properties	Analysis	Multiple
Content folder:		
Managed Metadata Usage Available for SharePoint Server farms.	Analysis	Multiple
Trend Analysis for Site Count	Analysis	Multiple
Broken Links	Analysis	Multiple
Solution Summary Not available to members of the Business Administrators group.	Analysis	Multiple

Web Application-Level Item	Type	Multi-Farm
Site Management folder:		
Create Site Collection Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Site Use Confirmation and Deletion Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Storage folder:		
Most/Least Storage Analysis	Analysis	Home Only
Site Collection Storage Analysis	Analysis	Multiple
Site Storage Analysis	Analysis	Multiple
Content Database Storage	Analysis	Multiple
Trend Analysis for Storage	Analysis	Home Only
Duplicate Files	Analysis	Home Only
Storage by File Type	Analysis	Home Only
Recycle Bins	Analysis	Multiple
Users and Security folder:		
Set User Direct Permissions	Action	Multiple
Delete User Permissions	Action	Multiple
Duplicate User Permissions	Action	Multiple
Add User to SharePoint Group	Action	Home or Remote
Delete SharePoint Groups	Action	Home Only
Backup Permissions	Action	Home Only
Manage Permissions Backups	Action	Home Only

Web Application-Level Item	Type	Multi-Farm
Manage Permissions Inheritance	Action	Multiple
Authentication Providers Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Policy for Web Application Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Self-Service Site Management Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Security for Web Part Pages Not available to members of the Business Administrators group.	SharePoint	Home or Remote
User Permissions for Web Applications Not available to members of the Business Administrators group.	SharePoint	Home or Remote
Orphaned Domain Users	Analysis	Multiple
Site Permissions	Analysis	Multiple
Comprehensive Permissions	Analysis	Multiple
Comprehensive User Analysis	Analysis	Home Only
SharePoint Group Analysis	Analysis	Multiple

Site Collection-Level Default Menu Items

Site Collection-Level Menu Item	Type	Multi Farm
Settings	SharePoint	Home or Remote
Advanced Search	Search	Home or Remote

Site Collection-Level Menu Item	Type	Multi Farm
Add to Selection	Action	(Depends on operation)
Properties	Action	Home or Remote
Activity folder:		
Most/Least Activity Analysis	Analysis	Home Only
Site Collection Activity Analysis	Analysis	Multiple
Site Activity Analysis	Analysis	Multiple
Trend Analysis for Activity	Analysis	Home Only
Activity by User	Analysis	Multiple
Activity by Profile Property Not available for Foundation farms.	Analysis	Home Only
Activity by Document	Analysis	Multiple
Checked Out Documents	Analysis	Multiple
Blog Post Activity Not available for Foundation farms..	Analysis	Home Only
Inactive Users.	Analysis	Multiple
Audit and Alerts folder:		
Manage Audit Settings	Action	Multiple
ControlPoint Alerts	Action	Home Only
Create SharePoint Alerts	Action	Home Only
Manage SharePoint Alerts	Action	Home Only
Audit Log Analysis	Analysis	Home Only
Change Log Analysis	Analysis	Home Only

Site Collection-Level Menu Item	Type	Multi Farm
SharePoint Alerts by Site	Analysis	Home Only
SharePoint Alerts by User	Analysis	Home Only
Automation folder:		
Create ControlPoint Policy	Action	Home Only
Manage ControlPoint Policies	Action	Home Only
Set Metadata Value Not available for Foundation farms.	Action	Home Only
Create Managed Metadata Not available for Foundation farms.	Action	Home Only
Clean-Up User Permissions	Action	Home Only
ControlPoint Policies Report	Analysis	Home Only
User to Group Analysis	Analysis	Home Only
Change Management folder:		
Content Types	Analysis	Multiple
Web Parts by Part	Analysis	Multiple
Web Parts by Site	Analysis	Multiple
Workflow Analysis	Analysis	Multiple
Compliance folder: Available to members of the Compliance Administrators group.		
Analyze Content	Action	Home Only
Manage Scanned Files	Action	Home Only
Compliance Summary	Analysis	Home Only
Compliance Actions Audit	Analysis	Home Only

Site Collection-Level Menu Item	Type	Multi Farm
Sensitive Content Activity	Analysis	Home Only
Scanned files by Scope	Analysis	Home Only
Configuration folder:		
Set Site Collection Properties	Action	Home Only
Set Site Properties	Action	Multiple
Set List Properties	Action	Multiple
Manage Site Collection Features	Action	Multiple
Manage Site Features	Action	Multiple
Navigation Settings Not available for Foundation farms.	SharePoint	Home or Remote
Search Settings Not available for Foundation farms.	SharePoint	Home or Remote
Search Scopes Not available for Foundation farms.	SharePoint	Home or Remote
Site Collection Administrators	SharePoint	Home or Remote
Site Collection Quotas and Locks	SharePoint	Home or Remote
SharePoint Hierarchy	Analysis	Home Only
Site Collection Properties	Analysis	Home Only
Site Properties	Analysis	Multiple
List Properties	Analysis	Multiple
Content folder:		
Copy Site	Action	Home Only
Move Site	Action	Home Only

Site Collection-Level Menu Item	Type	Multi Farm
Move to Another Content DB	Action	Home Only
Create New Site	SharePoint	Home or Remote
Delete Site Collection	SharePoint	Home or Remote
Content and Structure Not available for Foundation farms.	SharePoint	Home or Remote
Managed Metadata Usage	Analysis	Multiple
Trend Analysis for Site Count	Analysis	Home Only
Broken Links	Analysis	Multiple
Solution Summary	Analysis	Multiple
Storage folder		
Most/Least Storage Analysis	Analysis	Home Only
Site Collection Storage Analysis	Analysis	Multiple
Site Storage Analysis	Analysis	Multiple
Content Database Storage	Analysis	Multiple
Trend Analysis for Storage	Analysis	Home Only
Duplicate Files	Analysis	Home Only
Storage by File Type	Analysis	Home Only
Recycle Bins	Analysis	Multiple
Users and Security Folder		
Set User Direct Permissions	Action	Multiple
Delete User Permissions	Action	Multiple
Duplicate User Permissions	Action	Multiple

Site Collection-Level Menu Item	Type	Multi Farm
Set SharePoint Group Permissions	Action	Home or Remote
Delete SharePoint Group Permissions	Action	Home or Remote
Add User to SharePoint Group	Action	Home Only
Delete SharePoint Groups	Action	Home Only
Duplicate Permission Levels	Action	Home Only
Backup Permissions	Action	Home Only
Manage Permissions Backups	Action	Home Only
Manage Permissions Inheritance	Action	Multiple
Orphaned Domain Users	Analysis	Multiple
Site Permissions	Analysis	Multiple
Comprehensive Permissions	Analysis	Multiple
Comprehensive User Analysis	Analysis	Home Only
SharePoint Group Analysis	Analysis	Multiple

Site-Level Default Menu Items

Site-Level Menu Item	Type	Multi-Farm
Settings	SharePoint	Home or Remote
Open Site	SharePoint	Home or Remote
Add to Selection	Action	(Depends on operation)
Properties	Action	Home or Remote

Site-Level Menu Item	Type	Multi-Farm
Activity folder:		
Most/Least Activity Analysis	Analysis	Home Only
Site Activity Analysis	Analysis	Multiple
Inactive Users	Analysis	Multiple
Activity by User	Analysis	Multiple
Activity by Document	Analysis	Multiple
Checked Out Documents	Analysis	Multiple
Blog Post Activity Not available for Foundation farms.	Analysis	Home Only
Social Activity Analysis Not available for Foundation farms.	Analysis	Home Only
Audit and Alerts folder:		
Manage Audit Settings	Action	Home Only
Create SharePoint Alerts	Action	Home Only
Manage SharePoint Alerts	Action	Home Only
Audit Log Analysis	Analysis	Multiple
Change Log Analysis	Analysis	Multiple
SharePoint Alerts by Site	Analysis	Multiple
SharePoint Alerts by User	Analysis	Multiple
Automation folder:		
Create ControlPoint Policy	Action	Home Only
Manage ControlPoint Policies	Action	Home Only
Set Metadata Value	Action	Home Only

Site-Level Menu Item	Type	Multi-Farm
Not available for Foundation farms.		
Create Managed Metadata Not available for Foundation farms.	Action	Home Only
ControlPoint Policies	Analysis	Multiple
Change Management folder:		
Duplicate a Workflow Definition	Action	Multiple
Content Types	Analysis	Multiple
Web Parts by Part	Analysis	Multiple
Web Parts by Site	Analysis	Multiple
Workflow Analysis	Analysis	Multiple
Compliance folder: Available to members of the Compliance Administrators group.		
Analyze Content	Action	Home Only
Manage Scanned Files	Action	Home Only
Compliance Summary	Analysis	Home Only
Compliance Actions Audit	Analysis	Home Only
Sensitive Content Activity	Analysis	Home Only
Scanned files by Scope	Analysis	Home Only
Configuration folder:		
Set Site Properties	Action	Multiple
Duplicate Site Properties	Action	Home Only
Set List Properties	Action	Multiple
Manage Site Features	Action	Multiple

Site-Level Menu Item	Type	Multi-Farm
Navigation Settings Not available for Foundation farms.	SharePoint	Home Only
SharePoint Hierarchy	Analysis	Home Only
Site Properties	Analysis	Multiple
List Properties	Analysis	Multiple
Content folder:		
Copy Site	Action	Home Only
Move Site	Action	Home Only
Delete Site	Action	Home Only
Create	SharePoint	Home or Remote
Create SubSite	SharePoint	Home or Remote
Content and Structure Not available for Foundation farms.	SharePoint	Home or Remote
Libraries and Lists	SharePoint	Home or Remote
Sites and Workspaces	SharePoint	Home or Remote
View All Site Content	SharePoint	Home or Remote
Managed Metadata Usage Not available for Foundation farms.	Analysis	Multiple
Content Types	Analysis	Multiple
Web Parts by Part	Analysis	Multiple
Web Parts by Site	Analysis	Multiple
Workflow Analysis	Analysis	Multiple

Site-Level Menu Item	Type	Multi-Farm
Broken Links	Analysis	Multiple
<i>Storage folder</i>		
Most/Least Storage	Analysis	Home Only
Site Storage Analysis	Analysis	Multiple
Site Lists and Libraries Storage	Analysis	Home Only
Duplicate Files	Analysis	Home Only
Storage by File Type	Analysis	Home Only
<i>Users and Security Folder</i>		
Set User Direct Permissions	Action	Multiple
Delete User Permissions	Action	Multiple
Duplicate User Permissions	Action	Multiple
Set SharePoint Group Permissions	Action	Home or Remote
Delete SharePoint Group Permissions	Action	Home or Remote
Add User to SharePoint Group	Action	Home Only
Delete SharePoint Groups	Action	Home Only
Duplicate Permission Levels	Action	Home Only
Duplicate Site Security	Action	Home or Remote
Backup Permissions	Action	Home Only
Manage Permissions Backups	Action	Home Only
Manage Permissions Inheritance	Action	Multiple
All People	SharePoint	Home or Remote

Site-Level Menu Item	Type	Multi-Farm
New Group	SharePoint	Home or Remote
Site Permissions	SharePoint	Home or Remote
Orphan Domain Users	Analysis	Multiple
Site Permissions	Analysis	Multiple
Site List Permissions	Analysis	Home Only
Comprehensive Permissions	Analysis	Multiple
Permissions Changes by Site	Analysis	Home Only
Permissions Changes by User	Analysis	Home Only
Comprehensive User Analysis	Analysis	Home Only
SharePoint Group Analysis	Analysis	Multiple

List-Level Default Menu Items

List-Level Menu Item	Type	Multi Farm
Open	SharePoint	Home or Remote
Settings	SharePoint	Home or Remote
Add to Selection	Action	(Depends on operation)
Activity folder:		
Activity by User	Analysis	Multiple
Activity by Document Not available for Foundation farms.	Analysis	Multiple
Checked Out Documents	Analysis	Multiple
Audit and Alerts folder:		

List-Level Menu Item	Type	Multi Farm
Manage Audit Settings	Action	Multiple
Create SharePoint Alerts	Action	Multiple
Manage SharePoint Alerts	Action	Multiple
Audit Log Analysis	Analysis	Multiple
SharePoint Alerts by Site/List	Analysis	Multiple
SharePoint Alerts by User	Analysis	Multiple
Automation folder:		
Create ControlPoint Policy	Action	Home Only
Manage ControlPoint Policies	Action	Home Only
Set Metadata Value Not available for Foundation farms.	Action	Home Only
Create Managed Metadata Not available for Foundation farms.	Action	Home Only
Change Management folder:		
Duplicate a Workflow Definition	Action	Multiple
Workflow Analysis	Analysis	Multiple
Compliance folder: Available to members of the Compliance Administrators group.		
Analyze Content	Action	Home Only
Manage Scanned Files	Action	Home Only
Compliance Summary	Analysis	Home Only
Compliance Actions Audit	Analysis	Home Only
Sensitive Content Activity	Analysis	Home Only

List-Level Menu Item	Type	Multi Farm
Scanned Files by Scope	Analysis	Home Only
Scanned Files by Search Term	Analysis	Home Only
Configuration folder:		
Set List Properties	Action	Multiple
Duplicate List Properties	Action	Home Only
List Properties	Analysis	Home Only
Content folder:		
Copy List	Action	Home Only
Move List	Action	Home Only
Delete List	Action	Multiple
Copy List Item(s)	Action	Home Only
Move List Item(s)	Action	Home Only
Set Column Metadata Not available for Foundation farms.	Action	Home Only
Managed Metadata Usage Not available for Foundation farms.	Analysis	Multiple
Workflow Analysis	Analysis	Multiple
Users and Security folder:		
Set User Direct Permissions	Action	Multiple
Delete User Permissions	Action	Multiple
Duplicate User Permissions	Action	Multiple
Set SharePoint Group Permissions	Action	Home or Remote
Delete SharePoint Group Permissions	Action	Home or Remote

List-Level Menu Item	Type	Multi Farm
Manage Permissions Inheritance	Action	Multiple
Permissions by List Item	Analysis	Home Only
SharePoint Group Analysis	Analysis	Multiple

User-Level Default Menu Items

User-Level Menu Item	Type	Multi Farm*
Set User Direct Permissions	Action	Multiple
Delete User Permissions	Action	Multiple
Duplicate User Permissions	Action	Multiple
Add User to SharePoint Group	Action	Home Only
Edit User	SharePoint	Home Only
Site Permissions	Analysis	Multiple
Site List Permissions	Analysis	Analysis
Comprehensive Permissions	Analysis	Multiple
Comprehensive User Analysis	Analysis	Home Only
SharePoint Group Analysis	Analysis	Multiple

* For a user from a remote farm to be included in a multi-farm operation, they must also be a valid user on the home farm.

Site Admin Menu Items

By default, the Site Admin menu has most of the same ControlPoint actions and analyses as the [site-level menu](#).

Manage ControlPoint Default Menu Items

Menu items that are available to members of the Business Administrators group are identified by a checkmark (✓) in the **Business Admin?** column.

Manage ControlPoint Menu Item	Type	Business Admin?
Governance Policy Manager and Provisioning		
Provisioning is available for Standard installations only.		
Governance Policy Manager	Action	
Provisioning Profile Manager	Action	
Provisioning Requests Manager	Action	
Provisioning Custom Templates Manager	Action	
Compliance		
Available to members of the Compliance Administrators group		
Sensitive Content Configuration Maintenance*	Action	
Profile Maintenance	Action	
Search Term Maintenance	Action	
Sensitive Content Submission Maintenance	Action	
ControlPoint Compliance Actions	Action	
ControlPoint Configuration		
ControlPoint Configuration Site*	SharePoint Site	
ControlPoint Configuration Settings*	SharePoint List	
Auto Add Users to ControlPoint Groups	Action	
ControlPoint Menu List	SharePoint List	

Manage ControlPoint Menu Item	Type	Business Admin?
Menu Maintenance	Action	
Favorites Maintenance	Action	
Manage Farm List	Action	
ControlPoint Management		
Discovery	Action	
Run Saved Instructions	Action	
Calculate Farm User Account NOTE: This item is only accessible by ControlPoint Application Administrators	Action	
Reload Servier-side Cache	Action	
Purge Historical Data	Action	
Schedule Management and Logging		
Scheduled Jobs Report	Analysis	√
ControlPoint Task Audit	Analysis	
Logged Errors Report	Analysis	
View ControlPoint Log	Analysis	
Schedule Monitor	Action	√
ControlPoint Sentinel		
Sentinel Setup	Action	
Sentinel Report	Analysis	

* Administrators must have write access to the ControlPoint Configuration Site (as a member of the ControlPoint Application Administrators group, for example) to use this functionality.

About Us

Quest creates software solutions that make the benefits of new technology real in an increasingly complex IT landscape. From database and systems management, to Active Directory and Office 365 management, and cyber security resilience, Quest helps customers solve their next IT challenge now. Around the globe, more than 130,000 companies and 95% of the Fortune 500 count on Quest to deliver proactive management and monitoring for the next enterprise initiative, find the next solution for complex Microsoft challenges and stay ahead of the next threat. Quest Software. Where next meets now. For more information, visit www.quest.com.

Contacting Quest

For sales or other inquiries, visit www.quest.com/contact.

Technical Support Resources

Technical support is available to Quest customers with a valid maintenance contract and customers who have trial versions. You can access the Quest Support Portal at <https://support.quest.com>

The Support Portal provides self-help tools you can use to solve problems quickly and independently, 24 hours a day, 365 days a year. The Support Portal enables you to:

- Submit and manage a Service Request
- View Knowledge Base articles
- Sign up for product notifications
- Download software and technical documentation
- View how-to-videos
- Engage in community discussions
- Chat with support engineers online
- View services to assist you with your product