

Quest™ VROOM Dashboard 1.1  
**User and Administration Guide**



© 2017 Quest Software Inc.

**ALL RIGHTS RESERVED.**

This guide contains proprietary information protected by copyright. The software described in this guide is furnished under a software license or nondisclosure agreement. This software may be used or copied only in accordance with the terms of the applicable agreement. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of Quest Software Inc.

The information in this document is provided in connection with Quest Software products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Quest Software products. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, QUEST SOFTWARE ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL QUEST SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF QUEST SOFTWARE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Quest Software makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Quest Software does not make any commitment to update the information contained in this document.

If you have any questions regarding your potential use of this material, contact:

Quest Software Inc.  
Attn: LEGAL Dept.  
4 Polaris Way  
Aliso Viejo, CA 92656

Refer to our website (<https://www.quest.com>) for regional and international office information.

**Patents**

Quest Software is proud of our advanced technology. Patents and pending patents may apply to this product. For the most current information about applicable patents for this product, please visit our website at <https://www.quest.com/legal>.

**Trademarks**

Quest, the Quest logo, and Join the Innovation are trademarks and registered trademarks of Quest Software Inc. For a complete list of Quest marks, visit <https://www.quest.com/legal/trademark-information.aspx>. "Apache HTTP Server", Apache, "Apache Tomcat" and "Tomcat" are trademarks of the Apache Software Foundation. Google is a registered trademark of Google Inc. Android, Chrome, Google Play, and Nexus are trademarks of Google Inc. Red Hat, JBoss, the JBoss logo, and Red Hat Enterprise Linux are registered trademarks of Red Hat, Inc. in the U.S. and other countries. CentOS is a trademark of Red Hat, Inc. in the U.S. and other countries. Fedora and the Infinity design logo are trademarks of Red Hat, Inc. Microsoft, .NET, Active Directory, Internet Explorer, Hyper-V, Office 365, SharePoint, Silverlight, SQL Server, Visual Basic, Windows, Windows Vista and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. AIX, IBM, PowerPC, PowerVM, and WebSphere are trademarks of International Business Machines Corporation, registered in many jurisdictions worldwide. Java, Oracle, Oracle Solaris, PeopleSoft, Siebel, Sun, WebLogic, and ZFS are trademarks or registered trademarks of Oracle and/or its affiliates in the United States and other countries. SPARC is a registered trademark of SPARC International, Inc. in the United States and other countries. Products bearing the SPARC trademarks are based on an architecture developed by Oracle Corporation. OpenLDAP is a registered trademark of the OpenLDAP Foundation. HP is a registered trademark that belongs to Hewlett-Packard Development Company, L.P. Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both. MySQL is a registered trademark of MySQL AB in the United States, the European Union and other countries. Novell and eDirectory are registered trademarks of Novell, Inc., in the United States and other countries. VMware, ESX, ESXi, vSphere, vCenter, vMotion, and vCloud Director are registered trademarks or trademarks of VMware, Inc. in the United States and/or other jurisdictions. Sybase is a registered trademark of Sybase, Inc. The X Window System and UNIX are registered trademarks of The Open Group. Mozilla and Firefox are registered trademarks of the Mozilla Foundation. "Eclipse", "Eclipse Foundation Member", "EclipseCon", "Eclipse Summit", "Built on Eclipse", "Eclipse Ready", "Eclipse Incubation", and "Eclipse Proposals" are trademarks of Eclipse Foundation, Inc. IOS is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries. Apple, iPad, iPhone, Mac OS, Safari, Swift, and Xcode are trademarks of Apple Inc., registered in the U.S. and other countries. Ubuntu is a registered trademark of Canonical Ltd. Symantec and Veritas are trademarks or registered trademarks of Symantec Corporation or its affiliates in the U.S. and other countries. OpenSUSE, SUSE, and YAST are registered trademarks of SUSE LCC in the United States and other countries. Citrix, AppFlow, NetScaler, XenApp, and XenDesktop are trademarks of Citrix Systems, Inc. and/or one or more of its subsidiaries, and may be registered in the United States Patent and Trademark Office and in other countries. AlertSite and DéjàClick are either trademarks or registered trademarks of Boca Internet Technologies, Inc. Samsung, Galaxy S, and Galaxy Note are registered trademarks of Samsung Electronics America, Inc. and/or its related entities. MOTOROLA is a registered trademark of Motorola Trademark Holdings, LLC. The Trademark BlackBerry Bold is owned by Research In Motion Limited and is registered in the United States and may be pending or registered in other countries. Quest is not endorsed, sponsored, affiliated with or otherwise authorized by Research In Motion Limited. Ixia and the Ixia four-petal logo are registered trademarks or trademarks of Ixia. Opera, Opera Mini, and the O logo are trademarks of Opera Software ASA. Tevron, the Tevron logo, and CitraTest are registered trademarks of Tevron, LLC. PostgreSQL is a registered trademark of the PostgreSQL Global Development Group. MariaDB is a trademark or registered trademark of MariaDB Corporation Ab in the European Union and United States of America and/or other countries. Vormetric is a registered trademark of Vormetric, Inc. Intel, Itanium, Pentium, and Xeon are trademarks of Intel Corporation in the U.S. and/or other countries. Debian is a registered trademark of Software in the Public Interest, Inc. OpenStack is a trademark of the OpenStack Foundation. Amazon Web Services, the "Powered by Amazon Web Services" logo, and "Amazon RDS" are trademarks of Amazon.com, Inc. or its affiliates in the United States and/or other countries. Infobright, Infobright Community Edition and Infobright Enterprise Edition are trademarks of Infobright Inc. POLYCOM®, RealPresence® Collaboration Server, and RMX® are registered trademarks of Polycom, Inc. All other trademarks and registered trademarks are property of their respective

owners.

### Legend

- **WARNING:** A WARNING icon indicates a potential for property damage, personal injury, or death.
  
- ! **CAUTION:** A CAUTION icon indicates potential damage to hardware or loss of data if instructions are not followed.
  
- i **IMPORTANT NOTE, NOTE, TIP, MOBILE, or VIDEO:** An information icon indicates supporting information.

Quest VROOMDashboard User and Administration Guide  
Updated - May 2017  
Foglight Version - 5.7.5.8  
Software Version - 1.1

# Contents

<b>Using Quest VROOM Dashboard</b> .....	<b>5</b>
Installation requirements .....	5
Dashboard location and UI elements .....	5
Group selector .....	6
Menu bar .....	7
Quick view .....	7
<b>Getting Started Tab</b> .....	<b>8</b>
<b>Protected Status Tab</b> .....	<b>10</b>
Unprotected Virtual Machines table .....	10
Unmonitored Rapid Recovery Protected Virtual Machines table .....	11
<b>Repositories Capacity Planning Tab</b> .....	<b>12</b>
Repositories table .....	12
<b>Rapid Recovery Infrastructure Tab</b> .....	<b>14</b>
Core Servers table .....	14
Rapid Recovery Agents table .....	15
<b>Events Tab</b> .....	<b>16</b>
Tasks tab .....	17
Alerts tab .....	17
Journal tab .....	17
<b>Administration Tab</b> .....	<b>19</b>
Agents related commands .....	19
Creating Rapid Recovery Agent .....	20
Editing agent properties .....	21
<b>About Us</b> .....	<b>23</b>
We are more than just a name .....	23
Our brand, our vision. Together. ....	23
Contacting Quest .....	23
Technical support resources .....	23

# Using Quest VROOM Dashboard

Quest™ VROOM accelerates the performance of your entire virtual infrastructure, transforms the application experience for users, and helps you control license and hardware costs. Go way beyond simple Hyper-V and VMware monitoring by maximizing resource utilization and improving virtual application performance across hybrid environments.

- Reduce hardware and licensing costs by proactively predicting and budgeting for capital expenditures.
- Protect growing virtual environments automatically—systems, applications, and data.
- Recover from data loss or corruption in minutes with zero impact on your users, as if the outage never happened.

The *Quest VROOM Dashboard User and Administration Guide* is intended for users who belong to the Administrators group of Rapid Recovery Core Server and have been assigned either of the *System Administrator*, *Advanced Operator*, *Capacity Management Administrator*, *VMware Administrator*, or *VMware QuickView User* role.

This section introduces you to the Quest VROOM environment, and provides you with essential information.

For more information, see the following topics:

- [Installation requirements](#)
- [Dashboard location and UI elements](#)

## Installation requirements

Quest VROOM Dashboard comes installed on Foglight for Virtualization, Enterprise Edition and can be installed on a Foglight Management Server.

Quest VROOM Dashboard requires the following cartridges for data collection.

- *DRP-5.7.3.car*
- *VROOM\_1.1.0.car*


While Foglight for Virtualization, Enterprise Edition comes with these cartridges pre-installed and enabled, a stand-alone Foglight release requires that these components be installed on the Foglight Management Server. The sequence of cartridge installation is important because of their dependencies. For more information about installing Quest VROOM Dashboard, and for details about system requirements and version compatibility, see the *Quest VROOM Dashboard Release Notes*.

## Dashboard location and UI elements

After installing Quest VROOM Dashboard, the **Protection** entry appears under Homes.


### **To access the Protection dashboard:**

- 1 Log in to the Foglight browser interface.
- 2 Ensure that the navigation panel is open.

To open the navigation panel, click the right-facing arrow  on the left.

- 3 On the navigation panel, under *Homes*, click Protection.

The **Protection** dashboard opens.

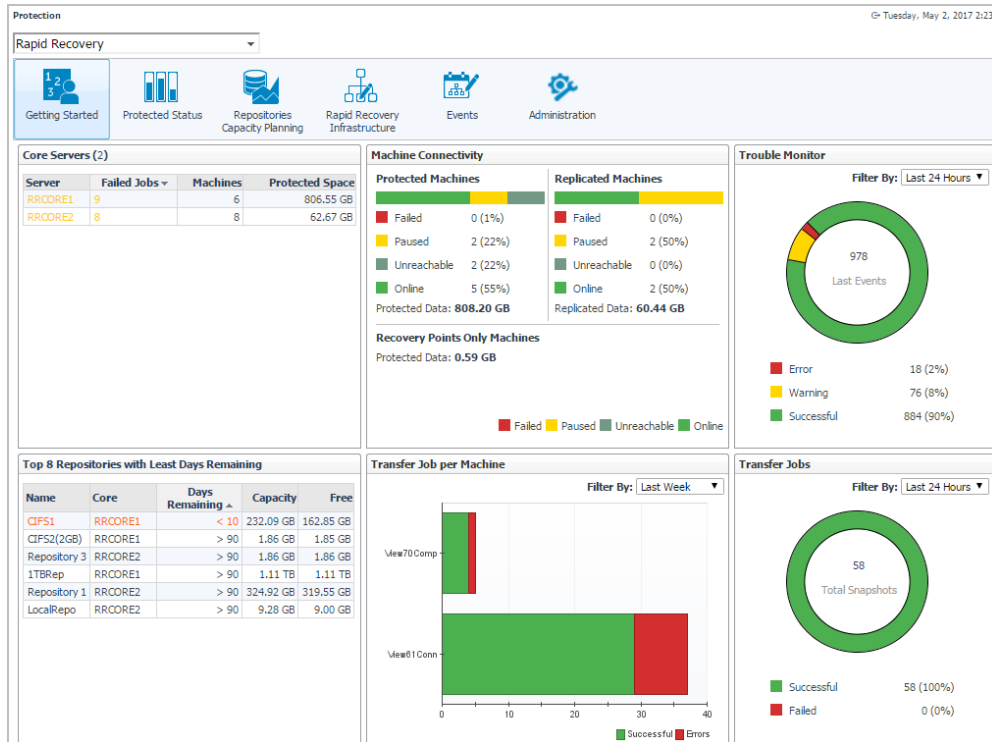


The **Protection** dashboard consists of the following UI elements:

- Group selector
- Menu bar
- Quick view

## Group selector

The Group selector is located at the top of the dashboard and allows you to select the Protection environment that you monitored.

Figure 1. Group Selector

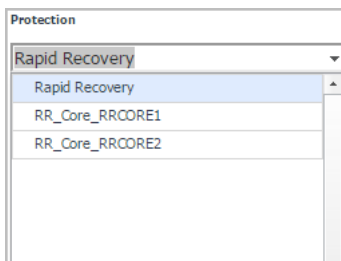

# Menu bar

The Menu bar contains the following tabs: *Getting Started Tab*, *Protected Status Tab*, *Repositories Capacity Planning Tab*, *Rapid Recovery Infrastructure Tab*, *Events Tab*, and *Administration Tab*.


Figure 2. Menu bar



# Quick view

The quick view is located on the lower part of the Protection dashboard, which is updated based on the tab selected on the menu bar.


Figure 3. Quick view

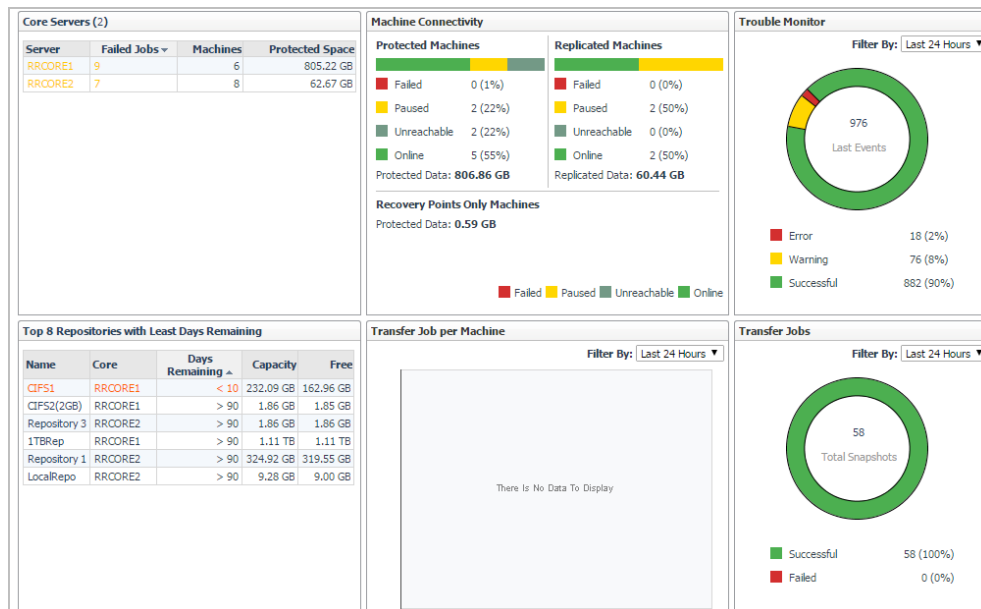


# Getting Started Tab

The **Getting Started** view of the Protection dashboard shows the data collected in the Rapid Recovery Core Servers.

Figure 4. Getting Started view

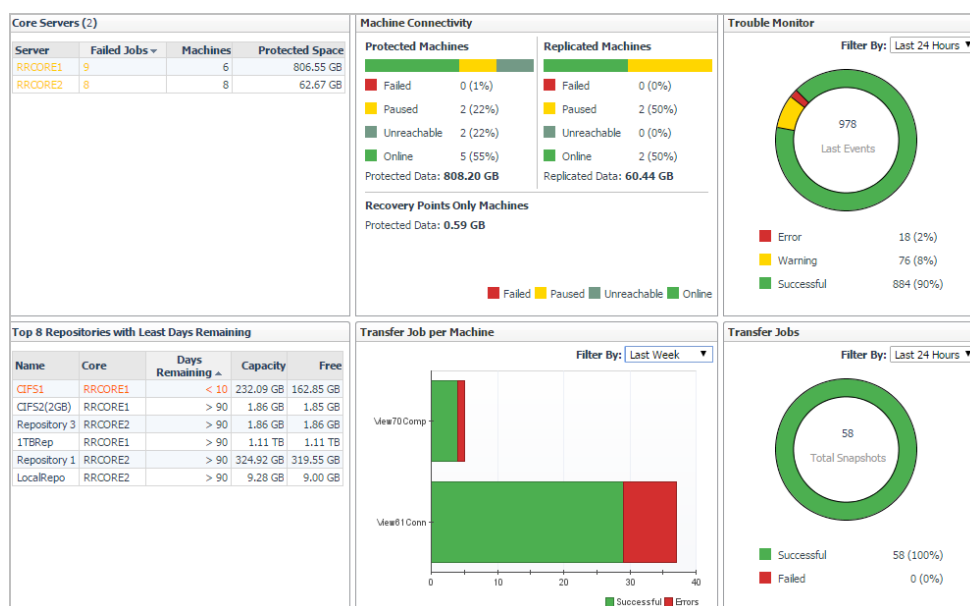

## To access the Getting Started view:

- 1 Log in to the Foglight browser interface.
- 2 Ensure that the navigation panel is open.  
To open the navigation panel, click the right-facing arrow  on the left.
- 3 On the navigation panel, under *Homes*, click Protection.  
The **Protection** dashboard opens.
- 4 Use the Group selector located at the top of the dashboard to select the protection environment that you want to monitor.
- 5 On the menu bar, click the Getting Started tab.  
The Getting Started view appears at the bottom of the Protection dashboard.

The Getting Started view includes the following tables:

- **Core Servers:** This table lists the monitored Rapid Recovery Core Servers. Click this link to navigate to the [Rapid Recovery Infrastructure Tab](#). For more information, see [Rapid Recovery Infrastructure Tab](#) on page 14.
- **Machine Connectivity:** This table shows the connectivity state of machines protected and replicated on the monitored Rapid Recovery core. It also shows connectivity for data on recovery points-only machine. For more information about recovery points-only machine, refer to the Rapid Recovery Help.




- *Trouble Monitor*: This table shows job activity, connections with the license portal, and transfer activity to detect early on the monitored Rapid Recovery core. The time range is configurable, defaulting to last 24 hours. Click this graph to navigate to the *Events > Journal* tab. For more information, see [Journal tab](#) on page 17.
- *Top 8 Repositories with Least Days Remaining*: This table shows the top eight repositories with the least days remaining on the monitored Rapid Recovery core. Click this link to navigate to the [Repositories Capacity Planning Tab](#). For more information, see [Repositories Capacity Planning Tab](#) on page 12.
- *Transfer Job per Machine*: This table shows, by protected machine of which the latest transfer job is failed, the number of successful and failed transfer jobs in the specified time range. This table shows the top ten machines with the most failed transfer job. The time range is configurable, defaulting to last 24 hours. Click this graph to navigate to the *Events > Tasks* tab. For more information, see [Tasks tab](#) on page 17.
- *Transfer Jobs*: This table shows all snapshot data transfers (including base images and incremental snapshots) that completed in the specified time range. The time range is configurable, defaulting to last 24 hours. Click this graph to navigate to *Events > Tasks* tab. For more information, see [Tasks tab](#) on page 17.

## Protected Status Tab


The **Protected Status** view of the Protection dashboard shows the unprotected virtual machines and unmonitored Rapid Recovery Protected virtual machines on the monitored Rapid Recovery Core. The Protected Status view includes the following two tables:

- Unprotected Virtual Machines: For more information, see [Unprotected Virtual Machines table](#) on page 10.
- Unmonitored Rapid Recovery Protected Virtual Machines: For more information, see [Unmonitored Rapid Recovery Protected Virtual Machines table](#) on page 11.

Figure 5. Protected Status view

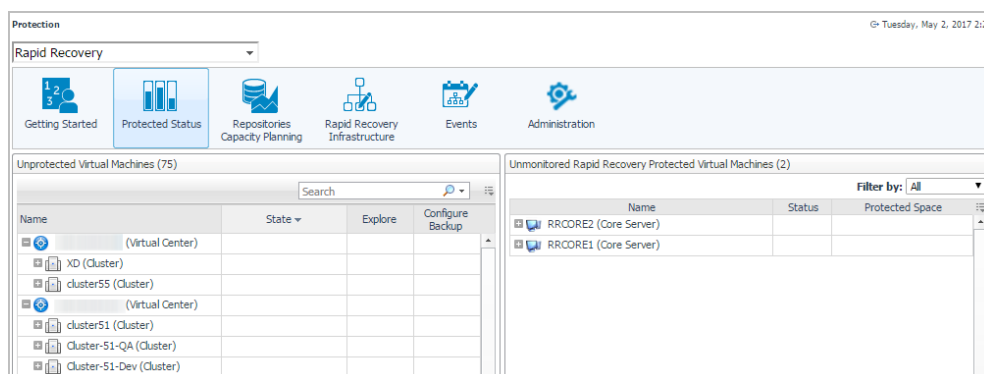

### To access the Protected Status view:

- 1 Log in to the Foglight browser interface.
- 2 Ensure that the navigation panel is open.  
To open the navigation panel, click the right-facing arrow  on the left.
- 3 On the navigation panel, under *Homes*, click Protection.  
The **Protection** dashboard opens.
- 4 Use the Group selector located at the top of the dashboard to select the protection environment that you want to monitor.
- 5 On the menu bar, click the Protected Status tab.  
The Protected Status view appears at the bottom of the Protection dashboard.



## Unprotected Virtual Machines table


The Unprotected Virtual Machines table shows a list of virtual machines that are monitored by the Foglight for VMware, but not backed up in the monitored Rapid Recovery environment.

**Table 1. Description of the Unprotected Virtual Machines table**

- Data displayed**
- **Name.** Shows the name of virtual machine.
  - **State.** Indicates whether the virtual machine is Powered On, Powered Off, or Suspended.
  - **Explore.** Shows the link to the Virtual Machine Explorer dashboard.
  - **Configure Backup.** Shows the link to the Rapid Recovery Core Server.

**Where to go next** Drill down on:

- **Explore.** Click  to navigate to the VMware Explorer dashboard. For more information, refer to the Foglight for VMware User and Reference Guide.
- **Configure Backup.** Click  to allow user to choose Rapid Recovery Core server for backup.



## Unmonitored Rapid Recovery Protected Virtual Machines table

The Unmonitored Rapid Recovery Protected Virtual Machines table shows a list of virtual machines that have backup files on the Rapid Recovery Core Servers, but not monitored by the Foglight for VMware.

**Table 2. Description of the Unmonitored Rapid Recovery Protected Virtual Machines table**

- Data displayed**
- **Name.** Shows the display name of Rapid Recovery Core Server, cluster, or virtual machine.
  - **Status.** Indicates whether the machine connectivity is Online, Failed, Paused, or Unreachable.
  - **Protected Space.** Indicates the amount of protected storage space.

# Repositories Capacity Planning Tab

The **Repositories Capacity Planning** view of the Protection dashboard shows the information about repositories in which backup snapshot data captured from your monitored protection environment is stored and managed. The **Repositories Capacity Planning** view includes the following two elements:


- **Repositories table:** For more information, see [Repositories table](#) on page 12.
- **Filter menu:** Allows you to filter the repositories based on the following options: Show All (default option), 10 days, 30 days, 60 days, and 90 days.

**Figure 6. Repositories Capacity Planning view**

Repository Name	Core	Days Remaining	Capacity	Free	Compression	Deduplication
CFS1	RRCORE1	< 10	232.09 GB	163.18 GB	91 %	87 %
Repository 3	RRCORE2	> 90	1.86 GB	1.86 GB	0 %	n/a
1TBRep	RRCORE1	> 90	1.11 TB	1.11 TB	0 %	n/a
CFS2(2GB)	RRCORE1	> 90	1.86 GB	1.85 GB	0 %	n/a
Repository 1	RRCORE2	> 90	324.92 GB	319.55 GB	91 %	75 %
LocalRepo	RRCORE2	> 90	9.28 GB	9.00 GB	47 %	31 %

## To access the Repositories Capacity Planning view:

- 1 Log in to the Foglight browser interface.
- 2 Ensure that the navigation panel is open.
 

To open the navigation panel, click the right-facing arrow  on the left.
- 3 On the navigation panel, under *Homes*, click Protection.
 

The **Protection** dashboard opens.
- 4 Use the Group selector located at the top of the dashboard to select the protection environment that you want to monitor.
- 5 On the menu bar, click the Repositories Capacity Planning tab.
 

The Repositories Capacity Planning view appears at the bottom of the Protection dashboard.

## Repositories table

The Repositories table shows a list of central locations in which backup snapshot data captured from your monitored Rapid Recovery environment is stored and managed.

**Table 3. Description of the Repositories table**

- Data displayed**
- **Repository Name.** Shows the display name of repository.
  - **Core.** Shows the Core server in which the repository is stored and managed.

**Table 3. Description of the Repositories table**

- **Days Remaining.** Indicates when the storage gets fully occupied.
- **Capacity.** Shows the total capacity on the storage.
- **Free.** Shows the free capacity on the storage.
- **Compression.** Shows the percentage of compression.
- **Deduplication.** Shows the percentage of deduplication.

# Rapid Recovery Infrastructure Tab

The **Rapid Recovery Infrastructure** view of the Protection dashboard shows the infrastructure of the service scoped Rapid Recovery Core servers. The **Rapid Recovery Infrastructure** view includes the following two tables:

- Core Servers: For more information, see [Core Servers table](#) on page 14.
- Rapid Recovery Agents: For more information, see [Rapid Recovery Agents table](#) on page 15.


**Figure 7. Rapid Recovery Infrastructure view**

Server Name	Machines	Protected Space
RRCORE2	8	62.08 GB
RRCORE1	6	800.77 GB

Name	Status	Protected Space
RRCORE2 (Core Server)	Online	99.91 MB
HW2012R2-1 (Physical Host)	Unreachable	601.14 MB
New12R2Cluster (Cluster)	Unreachable	992.42 MB
(VMWare Center)	Paused	0.00 B
RRCORE1 (Core Server)		

## To access the Rapid Recovery Infrastructure view:

- 1 Log in to the Foglight browser interface.
- 2 Ensure that the navigation panel is open.  
To open the navigation panel, click the right-facing arrow  on the left.
- 3 On the navigation panel, under *Homes*, click Protection.  
The **Protection** dashboard opens.
- 4 Use the Group selector located at the top of the dashboard to select the protection environment that you want to monitor.
- 5 On the menu bar, click the **Rapid Recovery Infrastructure** tab.  
The **Rapid Recovery Infrastructure** view appears at the bottom of the Protection dashboard.

## Core Servers table

The Core Servers table shows a list of core servers that exist in the monitored Rapid Recovery environment.


**Table 4. Description of the Core Servers table**

<b>Data displayed</b>	<ul style="list-style-type: none"> <li>• <b>Server Name.</b> Shows the name of Rapid Recovery Core.</li> <li>• <b>Machines.</b> Shows the amount of machines in this Rapid Recovery Core.</li> <li>• <b>Protected Spaces.</b> Indicates the amount of storage space protected by this Rapid Recovery Core.</li> </ul>
-----------------------	---

**Table 4. Description of the Core Servers table**

**Where to go next** Drill down on:

- **Server Name.** Click this column to show links to Infrastructure Health and Rapid Recovery Core Server.

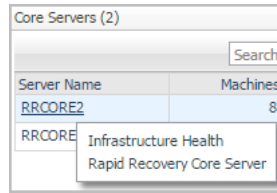

The screenshot shows a table titled "Core Servers (2)" with a search bar. The table has two columns: "Server Name" and "Machines". The first row shows "RRCORE2" and "8". A tooltip is displayed over the "RRCORE2" cell, containing the text "Infrastructure Health" and "Rapid Recovery Core Server".

Server Name	Machines
RRCORE2	8

## Rapid Recovery Agents table

The Rapid Recovery Agents table shows a list of agents that exist in the monitored Rapid Recovery environment.

**Table 5. Description of the Rapid Recovery Agents table**

**Data displayed**

- **Name.** Shows the name of Rapid Recovery Core Server or cluster.
- **Status.** Indicates whether the machine connectivity is Online, Failed, Paused, or Unreachable.
- **Protected Space.** Indicates the amount of protected storage space.

## Events Tab

The **Events** view of the Protection dashboard shows events for the Core, a specific protected or replicated machine in the monitored Rapid Recovery environment. The **Events** view includes the following three tabs:


- **Tasks tab:** A task is an event related to a job. A job is a process that the Rapid Recovery Core must perform. Each job has a current state, and a start and end time and date. Some tasks are initiated manually or scheduled by the user. Examples include forcing a snapshot, scheduling a backup, or performing a restore from a recovery point. Other tasks are automatic functions, such as running nightly jobs, or performing rollout using the default retention policy.
- **Alerts tab:** An alert is a priority event, such as an error, warning, or important informational message. If you request notifications of any specific events, these notifications appear in the Alerts subset.
- **Journal tab:** The Journal tab shows a complete list of all logged events (for the Core, or the selected machine, as appropriate). This list is more comprehensive, showing jobs, high priority events, and lower priority events. This category includes passive and non-job events (such as the Core starting successfully, or reporting status from the license portal).

Figure 8. Events view

Status	Core	Name	Start Time	End Time
Running	RRCORE1	Transfer of volumes [\\Hard disk 1] from 'PSS_VM1_ZHU55'	5/3/17 10:00 AM	1/3/01 12:00 AM
Succeeded	RRCORE2	Persist deduplication cache for RRCORE2DP	5/3/17 9:30 AM	5/3/17 9:30 AM
Succeeded	RRCORE1	Persist deduplication cache for RRCORE1DP	5/3/17 9:26 AM	5/3/17 9:26 AM
Succeeded	RRCORE1	Export of volumes [\\Hard disk 1\\Volume 1,\\Hard disk 1\\Volume 2] to [\\hv2012r2-1.vfog.local at 'E:\\view61conn.v61.vfog.local'] for 'View...	5/3/17 9:01 AM	5/3/17 9:05 AM
Succeeded	RRCORE1	'Replicating '10.30.155.166' to 'WIN-NN09PIDSQ8L'	5/3/17 9:01 AM	5/3/17 9:01 AM
Failed	RRCORE1	'Replicating 'View61Conn' to 'WIN-NN09PIDSQ8L'	5/3/17 9:01 AM	5/3/17 9:01 AM
Succeeded	RRCORE2	'Replicating '10.30.155.166' from 'WIN-NN09PIDSQ8L-RRcore2'	5/3/17 9:00 AM	5/3/17 9:01 AM
Succeeded	RRCORE1	'Replicating '10.30.155.166' to 'WIN-NN09PIDSQ8L'	5/3/17 9:00 AM	5/3/17 9:00 AM
Failed	RRCORE2	'Replicating 'View61Conn' from 'WIN-NN09PIDSQ8L-RRcore2'	5/3/17 9:00 AM	5/3/17 9:00 AM
Succeeded	RRCORE1	Transfer of volumes [\\Hard disk 1\\Volume 1, \\Hard disk 1\\Volume 2] from 'View61Conn'	5/3/17 9:00 AM	5/3/17 9:01 AM
Succeeded	RRCORE1	Transfer of volumes [\\Hard disk 1] from 'PSS_VM1_ZHU55'	5/3/17 9:00 AM	5/3/17 9:00 AM
Succeeded	RRCORE1	Transfer of volumes [Volume Labeled 'System Reserved', E:, C:] from 'HV2012R2-1.vfog.local'	5/3/17 9:00 AM	5/3/17 9:00 AM
Succeeded	RRCORE2	'Replicating '10.30.155.166' from 'WIN-NN09PIDSQ8L-RRcore2'	5/3/17 8:59 AM	5/3/17 9:00 AM
Succeeded	RRCORE2	Persisting Core state	5/3/17 8:30 AM	5/3/17 8:30 AM

### To access the Events view:

- 1 Log in to the Foglight browser interface.
- 2 Ensure that the navigation panel is open.
 

To open the navigation panel, click the right-facing arrow  on the left.
- 3 On the navigation panel, under *Homes*, click Protection.
 

The **Protection** dashboard opens.
- 4 Use the Group selector located at the top of the dashboard to select the protection environment that you want to monitor.
- 5 On the menu bar, click the **Events** tab.



The **Events** view appears at the bottom of the Protection dashboard.

## Tasks tab

A task is a job that the Rapid Recovery Core must perform, such as transferring data in a regularly scheduled backup, or performing a restore from a recovery point. The Tasks tab opens by default when navigating to the Events view.

The Tasks tab includes the following elements:

- **Events Time:** Allows you to filter events based on the following options: Last 1 Hour, Last 4 Hours, Last 12 Hours (default option), Last 48 Hours, This Week, and Last Week.
- **Events Status:** Allows you to filter events based on the following options: All (default option), Successful, and Failed.
- **Tasks table:**

### Data displayed

- **Status.** Indicates whether this task is Succeeded or Failed.
- **Core.** Shows the display name of this Rapid Recovery Core.
- **Name.** Shows the task type for this protected machine. Examples include transfer of volumes, The task name. This field lists the task type for this protected machine. Examples include transfer of volumes, maintaining repository, rolling up, and so on.
- **Start Time.** Indicates the time when this task starts.
- **End Time.** Indicates the time when this task ends.

## Alerts tab

An alert is a priority notification of an event. Any event for which you specifically requested notification appears in the list of alerts, along with errors, warnings, or important informational messages. To access the Alerts tab, click Alerts in the Events view.

The Alerts tab includes the following elements:

- **Events Time:** Allows you to filter alerts based on the following options: Last 1 Hour, Last 4 Hours, Last 12 Hours (default option), Last 48 Hours, This Week, and Last Week.
- **Events Level:** Allows you to filter alerts based on the following options: All (default option), Error, Info, and Warning.
- **Alerts table:**

### Data displayed

- **Level.** Indicates whether this alert is Info, Warning, or Error.
- **Core.** Shows the display name of this Rapid Recovery Core.
- **Date.** Indicates the date when this alert occurs.
- **Message.** Shows the detailed message of this alert.

## Journal tab

The journal lists all logged events. This list is comprehensive, including both job- and non-job-related events. It includes specific events for which you requested notification. The journal also lists passive events and status events from the Core, the license portal, and so on. To access the Journal tab, click Journal in the Events view. The Journal tab includes the following elements:

- Events Time: Allows you to filter journals based on the following options: Last 1 Hour, Last 4 Hours, Last 12 Hours (default option), Last 48 Hours, This Week, and Last Week.
- Events Level: Allows you to filter journals based on the following options: All (default option), Error, Info, and Warning.
- Journals table:


**Data displayed**

- **Level.** Indicates whether this journal is Info, Warning, or Error.
- **Core.** Shows the display name of this Rapid Recovery Core.
- **Date.** Indicates the date when this journal occurs.
- **Message.** Shows the detailed message of this journal.


# Administration Tab

The **Administration** view of the Protection dashboard contains links to agent administration tasks that you can use to manage Rapid Recovery agents.

**Figure 9. Administration view**

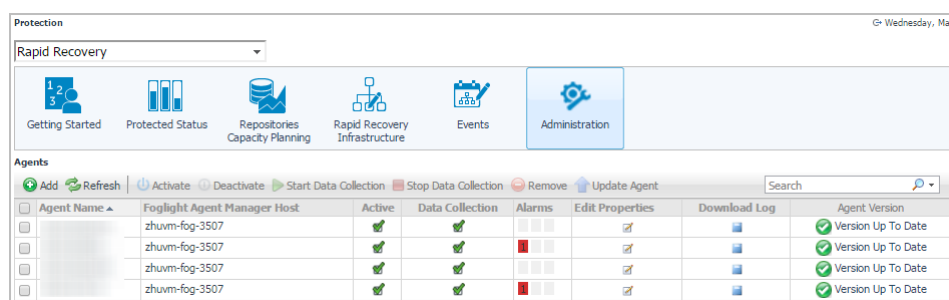

## To access the Administration view:

- 1 Log in to the Foglight browser interface.
- 2 Ensure that the navigation panel is open.  
To open the navigation panel, click the right-facing arrow  on the left.
- 3 On the navigation panel, under *Homes*, click Protection.  
The **Protection** dashboard opens.
- 4 Use the Group selector located at the top of the dashboard to select the protection environment that you want to monitor.
- 5 On the menu bar, click the **Administration** tab.  
The **Administration** view appears at the bottom of the Protection dashboard.

For more information, see the following topics:

- [Agents related commands](#)
- [Creating Rapid Recovery Agent](#)
- [Editing agent properties](#)

## Agents related commands

The **Administration view** shows a list of existing agent instances and a set of agent management commands at the top of the list. Use it to verify that your agents are collecting data from the monitored environment.

The following commands are available:

- **Add:** Starts a workflow for creating new agent instances. For more information, see [Creating Rapid Recovery Agent](#) on page 20.
- **Refresh:** Refreshes the list of agent instances and their states.

- **Activate:** Activates one or more selected agent instances. Activating an agent instance starts the agent process on the machine on which the agent is installed.
- **Deactivate:** Deactivates one or more selected agent instances. Deactivating an agent stops the agent process on the machine on which the agent is installed.
- **Start Data Collection:** Starts the data collection for one or more selected agent instances. Starting an agent's data collection causes the agent to begin monitoring the Rapid Recovery Core and to send the collected metrics back to the Management Server.
- **Stop Data Collection:** Stops the data collection for one or more selected agent instances. Stopping an agent's data collection causes the agent to stop monitoring the Rapid Recovery Core.
- **Edit Properties:** Starts a workflow for editing the properties of one or more selected agent instances. Each agent comes with a set of properties that it uses to configure its correct running state. [Editing agent properties](#) on page 21.
- **Download Log:** Retrieves agent log files that describe the operations an agent process performs while it is running on the monitored host. Use agent logs to solve problems related to an agent's state or behavior. For example, if an agent instance fails to activate, you can use an agent log file to determine the cause of the problem.
- **Remove:** Deletes the selected agent instance.
- **Update Agent:** Updates the agent package to the latest version.


**i** **IMPORTANT:** Updating the agent package using this command generates the previously existing credentials. However, if you update the agent package by re-deploying its .gar file through the Agent Status page, the credentials need to be re-created. To do that, select an agent instance, click **Edit Properties**, and configure the required credentials on the **Credentials** tab of the **Edit Tab Manager** dialog box.


To perform any of the available commands, select one or more check boxes in the left-most column and click the appropriate button. For example, to start an agent's data collection, select the check box in the agent row and click **Start Data Collection**.


## Creating Rapid Recovery Agent

The Rapid Recovery Agents collect data from your Rapid Recovery infrastructure and sends it to the Rapid Recovery Core Server. The agents keep track of resource utilization metrics and alerts you when certain pre-defined thresholds are reached.

### **To create a Rapid Recovery Agent:**

- 1 Log in to the Foglight browser interface.
- 2 Ensure that the navigation panel is open.  
To open the navigation panel, click the right-facing arrow  on the left.
- 3 On the navigation panel, under *Homes*, click Protection.  
The **Protection** dashboard opens.
- 4 Use the Group selector located at the top of the dashboard to select the protection environment that you want to monitor.
- 5 On the menu bar, click the **Administration** tab.  
The **Administration** view appears at the bottom of the Protection dashboard.
- 6 In the **Administration** view, click **Add**.  
The **Agent Setup Wizard** dialog box opens.

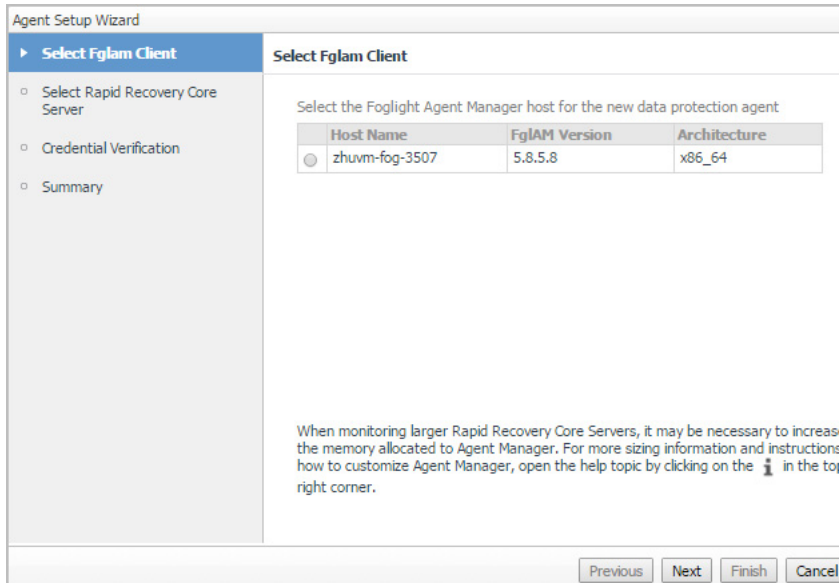

- 7 In the *Select Fglam Client* step, select the agent manager on which the new agent is to be deployed, and then click **Next**.
- 8 In the *Select Rapid Recovery Core Server* step, specify the following values, as needed, then click **Next**.
  - *Rapid Recovery Core Server*: The name or IP address of the computer on Rapid Recovery Core Server is running.
  - *Port*: The HTTP port number used by the Rapid Recovery Core Server.
- 9 In the *Credential Verification* step, perform either of the following:
  -  **NOTE:** The user credential must belong to the Administrators group of Rapid Recovery Core Server.

    - 1 Select Add Rapid Recovery Core server to a new credential, then the **Create New Credential** view appears on the right. Specify the credential related information, and then click **Next**.
    - Or
    - 2 Select Add Rapid Recovery Core server to an existing credential, then the **Selected Existing Credential** view appears on the right. Select an existing credential, and then click **Next**.
- 10 In the *Summary* step, confirm the agent information, and then click Finish.
 


The new Rapid Recovery Agent is created, and its data is to be monitored by Rapid Recovery after a few minutes.

## Editing agent properties

Default versions of these properties are installed with Foglight. However, you can edit the default shareable and agent properties, configure agent properties that apply only to a specific agent instance, and create edited clones of shareable properties that are used by a subset of agents of a certain type.

### To edit the Rapid Recovery Agent properties:

- 1 Log in to the Foglight browser interface.
- 2 Ensure that the navigation panel is open.
 

To open the navigation panel, click the right-facing arrow  on the left.
- 3 On the navigation panel, under *Homes*, click Protection.

The **Protection** dashboard opens.

- 4 Use the Group selector located at the top of the dashboard to select the protection environment that you want to monitor.
- 5 On the menu bar, click the **Administration** tab.

The **Administration** view appears at the bottom of the Protection dashboard.

- 6 Select the instance of the VMware Performance Agent which properties that you want to modify, and then click **Edit Properties**.
- 7 In the Rapid Recovery Agent: Edit Properties dialog box, edit the properties as needed, and then click Save.

The Rapid Recovery Agent: Edit Properties dialog box closes and the list of agent instances automatically refreshes in the display area.

## We are more than just a name

We are on a quest to make your information technology work harder for you. That is why we build community-driven software solutions that help you spend less time on IT administration and more time on business innovation. We help you modernize your data center, get you to the cloud quicker and provide the expertise, security and accessibility you need to grow your data-driven business. Combined with Quest's invitation to the global community to be a part of its innovation, and our firm commitment to ensuring customer satisfaction, we continue to deliver solutions that have a real impact on our customers today and leave a legacy we are proud of. We are challenging the status quo by transforming into a new software company. And as your partner, we work tirelessly to make sure your information technology is designed for you and by you. This is our mission, and we are in this together. Welcome to a new Quest. You are invited to Join the Innovation™.

## Our brand, our vision. Together.

Our logo reflects our story: innovation, community and support. An important part of this story begins with the letter Q. It is a perfect circle, representing our commitment to technological precision and strength. The space in the Q itself symbolizes our need to add the missing piece—you—to the community, to the new Quest.

## Contacting Quest

For sales or other inquiries, visit <https://www.quest.com/company/contact-us.aspx> or call +1-949-754-8000.

## Technical support resources

Technical support is available to Quest customers with a valid maintenance contract and customers who have trial versions. You can access the Quest Support Portal at <https://support.quest.com>.

The Support Portal provides self-help tools you can use to solve problems quickly and independently, 24 hours a day, 365 days a year. The Support Portal enables you to:

- Submit and manage a Service Request.
- View Knowledge Base articles.
- Sign up for product notifications.
- Download software and technical documentation.
- View how-to-videos.
- Engage in community discussions.
- Chat with support engineers online.
- View services to assist you with your product.